



# TAS5720x 具有支持多达 8 通道的 TDM 接口的数字输入单声道 D 类音频放大器

## 1 特性

- 单声道 D 类放大器
  - 0.15% 总谐波失真 (THD) 时的持续输出功率为 20W (19V/4Ω)
- 时分复用 (TDM) 音频输入
  - 多达 8 条通道 (32 位, 48kHz)
- I<sup>2</sup>C 控制, 有 8 个 I<sup>2</sup>C 地址可供选择
- 电源
  - 功率放大器: 4.5V 至 16.5V, TAS5720L
  - 功率放大器: 4.5V 至 26.4V, TAS5720M
  - 数字 I/O 电压: 3.3V
- 保护: 热保护和短路保护
- 封装: 4mm × 4mm、32 引脚超薄四方扁平无引线封装 (VQFN)

## 2 应用

- 低音炮
- 音箱
- 条形扬声器
- 环绕立体声系统

## 3 说明

TAS5720x 器件是一款高效单声道 D 类音频功率放大器, 针对高瞬态功率能力进行了优化, 从而能够利用小型扬声器的动态功率余量。该器件可持续为 4Ω 的扬声器提供超过 15W 的功率。

数字时分复用 (TDM) 接口支持多达 8 个器件共用同一条总线。

TAS5720x 器件采用 32 引脚、4mm × 4mm、VQFN 封装, 使得 PCB 外形更加紧凑。

器件信息<sup>(1)</sup>

| 器件型号     | 封装        | 封装尺寸 (标称值)      |
|----------|-----------|-----------------|
| TAS5720L | VQFN (32) | 4.00mm x 4.00mm |
| TAS5720M |           |                 |

(1) 要了解所有可用封装, 请参见数据表末尾的可订购产品附录。




# TAS5720L, TAS5720M

ZHCSET5B – MAY 2015 – REVISED FEBRUARY 2016

www.ti.com.cn

中的引脚名称 SCLK 更改为 BCLK

## 简化电路原理图

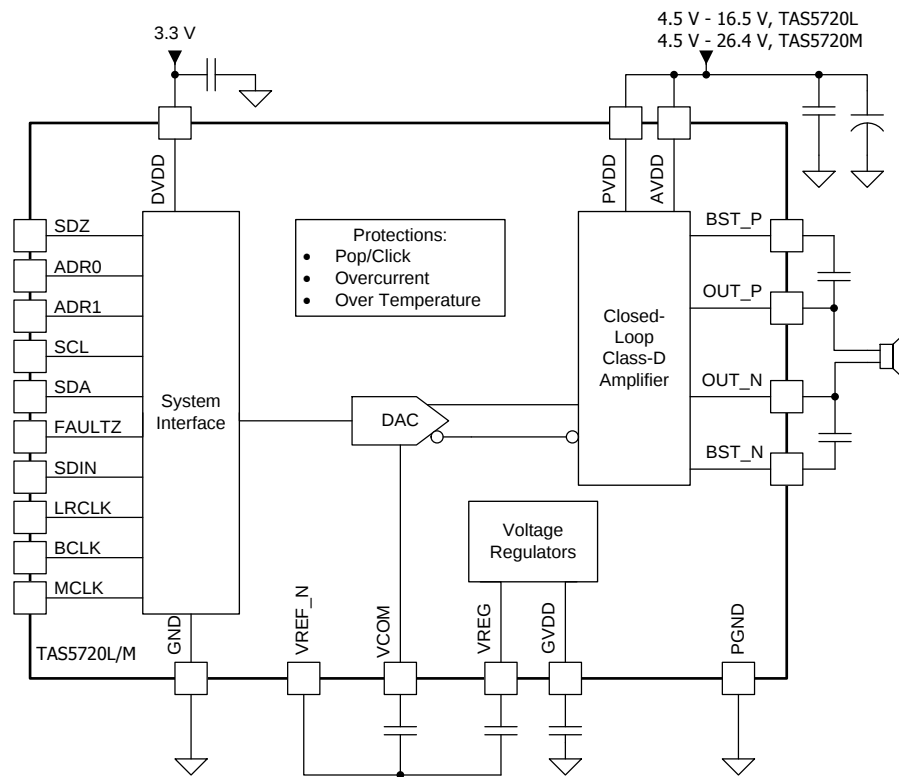

## 目录


|          |                                              |           |           |                                              |           |
|----------|----------------------------------------------|-----------|-----------|----------------------------------------------|-----------|
| <b>1</b> | <b>特性</b> .....                              | <b>1</b>  | 7.4       | Device Functional Modes .....                | <b>31</b> |
| <b>2</b> | <b>应用</b> .....                              | <b>1</b>  | 7.5       | Register Maps .....                          | <b>33</b> |
| <b>3</b> | <b>说明</b> .....                              | <b>1</b>  | <b>8</b>  | <b>Applications and Implementation</b> ..... | <b>41</b> |
| <b>4</b> | <b>修订历史记录</b> .....                          | <b>3</b>  | 8.1       | Application Information.....                 | <b>41</b> |
| <b>5</b> | <b>Pin Configuration and Functions</b> ..... | <b>4</b>  | 8.2       | Typical Application .....                    | <b>41</b> |
| <b>6</b> | <b>Specifications</b> .....                  | <b>6</b>  | <b>9</b>  | <b>Power Supply Recommendations</b> .....    | <b>43</b> |
| 6.1      | Absolute Maximum Ratings .....               | <b>6</b>  | <b>10</b> | <b>Layout</b> .....                          | <b>43</b> |
| 6.2      | ESD Ratings.....                             | <b>6</b>  | 10.1      | Layout Guidelines .....                      | <b>43</b> |
| 6.3      | Recommended Operating Conditions.....        | <b>6</b>  | 10.2      | Layout Example .....                         | <b>44</b> |
| 6.4      | Thermal Information .....                    | <b>6</b>  | <b>11</b> | <b>器件和文档支持</b> .....                         | <b>45</b> |
| 6.5      | Electrical Characteristics.....              | <b>7</b>  | 11.1      | 文档支持 .....                                   | <b>45</b> |
| 6.6      | Timing Requirements .....                    | <b>10</b> | 11.2      | 社区资源 .....                                   | <b>45</b> |
| 6.7      | Typical Characteristics .....                | <b>13</b> | 11.3      | 商标 .....                                     | <b>45</b> |
| <b>7</b> | <b>Detailed Description</b> .....            | <b>20</b> | 11.4      | 静电放电警告 .....                                 | <b>45</b> |
| 7.1      | Overview .....                               | <b>20</b> | 11.5      | Glossary .....                               | <b>45</b> |
| 7.2      | Functional Block Diagram .....               | <b>20</b> | <b>12</b> | <b>机械、封装和可订购信息</b> .....                     | <b>45</b> |
| 7.3      | Feature Description.....                     | <b>20</b> |           |                                              |           |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| <b>Changes from Revision A (November 2015) to Revision B</b>                | <b>Page</b> |
|-----------------------------------------------------------------------------|-------------|
| • Updated Typical Characteristics graphs with new data, new standards. .... | <b>13</b>   |
| • 已添加 new Layout Example .....                                              | <b>44</b>   |
| <b>Changes from Original (September 2015) to Revision A</b>                 | <b>Page</b> |
| • 量产发布 .....                                                                | <b>1</b>    |

## 5 Pin Configuration and Functions

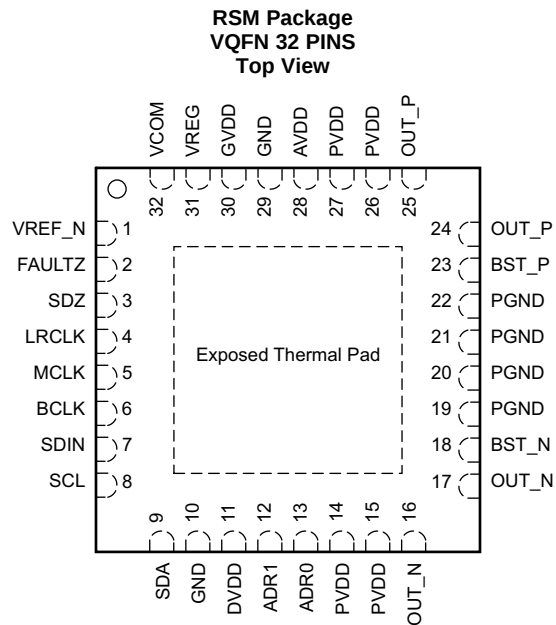

### Pin Functions

| PIN    |                      | I/O/P <sup>(1)</sup> | DESCRIPTION                                                                                                                                      |
|--------|----------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME   | NO.                  |                      |                                                                                                                                                  |
| ADR1   | 12                   | I                    | I <sup>2</sup> C address inputs. Each pin can detect a short to DVDD, a short to GND, a 22-kΩ connection to GND, and a 22-kΩ connection to DVDD. |
| ADR0   | 13                   | I                    |                                                                                                                                                  |
| AVDD   | 28                   | P                    | Analog power supply input. Connect directly to PVDD.                                                                                             |
| BST_N  | 18                   | P                    | Class-D Amplifier negative bootstrap. Connect to a capacitor between BST_N and OUT_N.                                                            |
| BST_P  | 23                   | P                    | Class-D Amplifier positive bootstrap. Connect to a capacitor between BST_P and OUT_P.                                                            |
| DVDD   | 11                   | P                    | Digital power supply. Connect to a 3.3-V supply with external decoupling capacitor.                                                              |
| FAULTZ | 2                    | O                    | Open drain active low fault flag. Pull up on PCB with resistor to DVDD.                                                                          |
| LRCLK  | 4                    | I                    | TDM interface frame synchronization.                                                                                                             |
| GND    | 10<br>29             | P                    | Ground. Connect to PCB ground plane.                                                                                                             |
| GVDD   | 30                   | O                    | Class-D amplifier gate drive regulator output. Connect decoupling cap to PCB ground plane.                                                       |
| MCLK   | 5                    | I                    | Device master clock.                                                                                                                             |
| PGND   | 19<br>20<br>21<br>22 | P                    | Power ground. Connect to PCB ground plane.                                                                                                       |
| PVDD   | 14<br>15<br>26<br>27 | P                    | Class-D amplifier power supply input. Connect to PVDD supply and decouple externally.                                                            |
| OUT_N  | 16<br>17             | O                    | Class-D amplifier negative output.                                                                                                               |
| OUT_P  | 24<br>25             | O                    | Class-D amplifier positive output.                                                                                                               |
| BCLK   | 6                    | I                    | TDM Interface serial bit clock.                                                                                                                  |

(1) I = input, O = output, P = power, I/O = bi-directional

### Pin Functions (continued)

| PIN         |     | I/O/P <sup>(1)</sup> | DESCRIPTION                                                                          |
|-------------|-----|----------------------|--------------------------------------------------------------------------------------|
| NAME        | NO. |                      |                                                                                      |
| SCL         | 8   | I                    | I <sup>2</sup> C clock Input. Pull up on PCB with a 2.4-kΩ resistor.                 |
| SDA         | 9   | I/O                  | I <sup>2</sup> C bi-directional data. Pull up on PCB with a 2.4-kΩ resistor.         |
| SDIN        | 7   | I                    | TDM interface data input.                                                            |
| SDZ         | 3   | I                    | Active low shutdown signal. Assert low to hold device inactive.                      |
| Thermal Pad | 33  | G                    | Connect to GND for best system performance. If not connected to GND, leave floating. |
| VCOM        | 32  | O                    | Common mode reference output. Connect decoupling capacitor to the VREF_N pin.        |
| VREF_N      | 1   | P                    | Negative reference for analog. Connect to VCOM and VREG capacitor negative pins.     |
| VREG        | 31  | O                    | Analog regulator output. Connect decoupling capacitor to the VREF_N pin.             |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                               |                                          | MIN  | MAX                     | UNIT |
|-----------------------------------------------|------------------------------------------|------|-------------------------|------|
| Supply voltage <sup>(2)</sup>                 | PVDD, AVDD (TAS5720L)                    | −0.3 | 20                      | V    |
|                                               | PVDD, AVDD (TAS5720M)                    | −0.3 | 30                      |      |
|                                               | DVDD                                     | −0.3 | 4                       |      |
| Digital input voltage                         | Digital inputs referenced to DVDD supply | −0.5 | V <sub>DVDD</sub> + 0.5 | V    |
| Ambient operating temperature, T <sub>A</sub> |                                          | −25  | 85                      | °C   |
| Storage temperature, T <sub>stg</sub>         |                                          | −40  | 125                     | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods can affect device reliability.
- (2) All voltages are with respect to network ground pin.

### 6.2 ESD Ratings

|                    |                         | VALUE                                                                          | UNIT  |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, <sup>(1)</sup>             | ±4000 |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1500 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                     |                                  |          | MIN               | TYP | MAX  | UNIT |
|---------------------|----------------------------------|----------|-------------------|-----|------|------|
| PVDD/<br>AVDD       | Power supply voltage             | TAS5720L | 4.5               |     | 16.5 | V    |
|                     |                                  | TAS5720M | 4.5               |     | 26.4 | V    |
| DVDD                | Power supply voltage             |          | 3                 | 3.3 | 3.6  | V    |
| V <sub>IH(DR)</sub> | High-level digital input voltage |          | V <sub>DVDD</sub> |     |      | V    |
| V <sub>IL(DR)</sub> | Low-level digital input voltage  |          | 0                 |     |      | V    |
| R <sub>SPK</sub>    | Minimum speaker load             |          | 3.2               |     |      | Ω    |
| T <sub>A</sub>      | Operating free-air temperature   |          | −25               |     | 85   | °C   |
| T <sub>J</sub>      | Operating junction temperature   |          | −25               |     | 150  | °C   |

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TAS5720x   | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | RSM (VQFN) |      |
|                               |                                              | 32 PINS    |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 37.3       | °C/W |
| R <sub>θJClot</sub>           | Junction-to-case (top) thermal resistance    | 30.4       | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 7.9        | °C/W |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.4        | °C/W |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 7.7        | °C/W |
| R <sub>θJCbot</sub>           | Junction-to-case (bottom) thermal resistance | 2.5        | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report ([SPRA953](#)).

## 6.5 Electrical Characteristics

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

| PARAMETER                          |                                                           | CONDITIONS                                              | MIN             | TYP            | MAX              | UNIT             |
|------------------------------------|-----------------------------------------------------------|---------------------------------------------------------|-----------------|----------------|------------------|------------------|
| <b>DIGITAL INPUT AND OUTPUT</b>    |                                                           |                                                         |                 |                |                  |                  |
| $V_{IH}$                           | High-level digital input logic voltage threshold          | All digital pins                                        | 70% $V_{DVDD}$  |                |                  |                  |
| $V_{IL}$                           | Low-level digital input logic voltage threshold           | All digital pins                                        |                 | 30% $V_{DVDD}$ |                  |                  |
| $I_{IH}$                           | Input logic "high" leakage for digital inputs             | All digital pins, excluding SDZ                         |                 |                | 15               | $\mu\text{A}$    |
| $I_{IL}$                           | Input logic "low" leakage for digital inputs              | All digital pins, excluding SDZ                         |                 |                | -15              | $\mu\text{A}$    |
| $I_{IH(SDZ)}$                      | Input logic "high" leakage for SDZ inputs                 | SDZ                                                     |                 |                | 1                | $\mu\text{A}$    |
| $I_{IL(SDZ)}$                      | Input logic "low" leakage for SDZ inputs                  | SDZ                                                     |                 |                | -1               | $\mu\text{A}$    |
| $V_{OL}$                           | Output logic "low" for FAULTZ open drain Output           | $I_{OL} = -2\text{ mA}$                                 |                 | 10% $V_{DVDD}$ |                  |                  |
| $C_{IN}$                           | Input capacitance for digital inputs                      | All digital pins                                        |                 | 5              |                  | pF               |
| <b>MASTER CLOCK</b>                |                                                           |                                                         |                 |                |                  |                  |
| $D_{(MCLK)}$                       | Allowable MCLK duty cycle                                 |                                                         | 45%             | 50%            | 55%              |                  |
| $f_{(MCLK)}$                       | MCLK input frequency                                      |                                                         |                 |                | 25               | MHz              |
|                                    | Supported single-speed MCLK frequencies                   | Values: 64, 128, 256, and 512                           | $64 \times f_s$ |                | $512 \times f_s$ |                  |
|                                    | Supported double-speed MCLK frequencies                   | Values: 64, 128, and 256                                | $64 \times f_s$ |                | $256 \times f_s$ |                  |
| <b>SERIAL AUDIO PORT</b>           |                                                           |                                                         |                 |                |                  |                  |
| $D_{(BCLK)}$                       | Allowable BCLK duty cycle                                 |                                                         | 45%             | 50%            | 55%              |                  |
| $f_{(BCLK)}$                       | BCLK input frequency                                      |                                                         |                 |                | 25               | MHz              |
|                                    | Supported single-speed BCLK frequencies                   | Values: 64, 128, 256, and 512                           | $64 \times f_s$ |                | $512 \times f_s$ |                  |
|                                    | Supported double-speed BCLK frequencies                   | Values: 64, 128, and 256                                | $64 \times f_s$ |                | $256 \times f_s$ |                  |
| $f_s$                              | Supported single-speed input sample rates                 | Values: 44.1 and 48                                     | 44.1            |                | 48               | kHz              |
|                                    | Supported double-speed input sample rates                 | Values: 88.2 and 96                                     | 88.2            |                | 96               | kHz              |
| <b>I<sup>2</sup>C CONTROL PORT</b> |                                                           |                                                         |                 |                |                  |                  |
| $C_{L(I2C)}$                       | Allowable load capacitance for each I <sup>2</sup> C Line |                                                         |                 |                | 400              | pF               |
| $f_{SCL}$                          | SCL frequency                                             | No wait states                                          |                 |                | 400              | kHz              |
| <b>PROTECTION</b>                  |                                                           |                                                         |                 |                |                  |                  |
| $OTE_{(THRESH)}$                   | Overtemperature error (OTE) threshold                     |                                                         |                 | 150            |                  | $^\circ\text{C}$ |
| $OTE_{(HYST)}$                     | Overtemperature error (OTE) hysteresis                    |                                                         |                 | 15             |                  | $^\circ\text{C}$ |
| $OCE_{(THRESH)}$                   | Overcurrent error (OCE) threshold                         | $V_{(PVDD)} = 16.5\text{ V}$ , $T_A = 25^\circ\text{C}$ |                 | 6              |                  | A                |
| $DCE_{(THRESH)}$                   | DC error (DCE) threshold                                  | $V_{(PVDD)} = 16.5\text{ V}$ , $T_A = 25^\circ\text{C}$ |                 | 2.6            |                  | V                |

## Electrical Characteristics (接下页)

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{PWM} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

| PARAMETER                    |                                      | CONDITIONS                                                                                                                | MIN | TYP               | MAX | UNIT                |
|------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----|-------------------|-----|---------------------|
| <b>AMPLIFIER PERFORMANCE</b> |                                      |                                                                                                                           |     |                   |     |                     |
| $P_{OUT}$                    | Continuous average power             | $R_L = 4\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 7.2\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                      |     | 6.6               |     | W                   |
|                              |                                      | $R_L = 8\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 7.2\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                      |     | 3.7               |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 12\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                       |     | 17.8              |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 12\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                       |     | 10.1              |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 15\text{ V}$ , $f_{IN} = 1\text{ kHz}$ , $T_A = 60^\circ\text{C}$            |     | 27.4              |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 15\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                       |     | 15.8              |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 19\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                       |     | 27                |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 19\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                       |     | 25.3              |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 24\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                       |     | 22.1              |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , 10% THD+N, $V_{(PVDD)} = 24\text{ V}$ , $f_{IN} = 1\text{ kHz}$                                       |     | 39.8              |     |                     |
| THD+N                        | Total harmonic distortion plus noise | $R_L = 4\ \Omega$ , $V_{(PVDD)} = 7.2\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $f_{IN} = 1\text{ kHz}$                        |     | 0.033%            |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 7.2\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $f_{IN} = 1\text{ kHz}$                        |     | 0.015%            |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , $V_{(PVDD)} = 12\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $f_{IN} = 1\text{ kHz}$                         |     | 0.03%             |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 12\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $20\text{ Hz} \leq f_{IN} \leq 20\text{ kHz}$   |     | 0.013v            |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , $V_{(PVDD)} = 15\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $20\text{ Hz} \leq f_{IN} \leq 20\text{ kHz}$   |     | 0.028%            |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 15\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $20\text{ Hz} \leq f_{IN} \leq 20\text{ kHz}$   |     | 0.012%            |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , $V_{(PVDD)} = 19\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $20\text{ Hz} \leq f_{IN} \leq 20\text{ kHz}$   |     | 0.026%            |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 19\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $20\text{ Hz} \leq f_{IN} \leq 20\text{ kHz}$   |     | 0.013%            |     |                     |
|                              |                                      | $R_L = 4\ \Omega$ , $V_{(PVDD)} = 24\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $20\text{ Hz} \leq f_{IN} \leq 20\text{ kHz}$   |     | 0.026%            |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 24\text{ V}$ , $P_{OUT} = 1\text{ W}$ , $20\text{ Hz} \leq f_{IN} \leq 20\text{ kHz}$   |     | 0.016%            |     |                     |
| $P_{EFF}$                    | Power efficiency                     | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 12\text{ V}$ , $P_{OUT} = 9\text{ W}$                                                   |     | 91%               |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 12\text{ V}$ , $P_{OUT} = 9\text{ W}$ , $f_{PWM} = 384\text{ kHz}$                      |     | 90%               |     |                     |
|                              |                                      | $R_L = 8\ \Omega$ , $V_{(PVDD)} = 24\text{ V}$ , $P_{OUT} = 40\text{ W}$                                                  |     | 90%               |     |                     |
| $V_N$                        | Integrated noise floor voltage       | A-Weighted, $R_L = 8\ \Omega$ , Gain = 20.7 dBV                                                                           |     | 50                |     | $\mu\text{V}_{rms}$ |
| $\Phi_{CC}$                  | Channel-to-channel phase shift       | Output phase shift between multiple devices from 20 Hz to 20 kHz. Across all sample frequencies and SAIF operating modes. |     | 0.2               |     | deg                 |
| $A_{(RIPPLE)}$               | Frequency response                   | Maximum deviation above or below passband gain.                                                                           |     | $\pm 0.15$        |     | dB                  |
|                              | -3 dB Output Cutoff Frequency        |                                                                                                                           |     | $0.47 \times f_s$ |     | Hz                  |

## Electrical Characteristics (接下页)


$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

| PARAMETER              |                                                    | CONDITIONS                                                                                            | MIN | TYP   | MAX   | UNIT           |
|------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----|-------|-------|----------------|
| AV <sub>(00)</sub>     | Amplifier analog gain <sup>(1)</sup>               | ANALOG_GAIN[1:0] register bits set to "00"                                                            |     | 19.2  |       | dBV            |
| AV <sub>(01)</sub>     |                                                    | ANALOG_GAIN[1:0] register bits set to "01"                                                            |     | 20.7  |       |                |
| AV <sub>(10)</sub>     |                                                    | ANALOG_GAIN[1:0] register bits set to "10"                                                            |     | 23.5  |       |                |
| AV <sub>(11)</sub>     |                                                    | ANALOG_GAIN[1:0] register bits set to "11"                                                            |     | 26.3  |       |                |
| AV <sub>(ERROR)</sub>  | Amplifier analog gain error                        |                                                                                                       |     |       | ±0.15 | dB             |
| V <sub>OS</sub>        | DC output offset voltage                           | Measured between OUTP and OUTN                                                                        |     | 1.5   |       | mV             |
| KCP                    | Click-pop performance                              |                                                                                                       |     | −60   |       | dBV            |
| PSRR                   | Power supply rejection ratio                       | DC, 5.5 V ≤ V <sub>(PVDD)</sub> ≤ 26.4 V                                                              |     | 87    |       | dB             |
|                        |                                                    | AC, V <sub>(PVDD)</sub> = 16.5 V + 100 mV <sub>P-P</sub> , f <sub>(RIPPLE)</sub> from 20 Hz to 10 kHz |     | 53    |       |                |
|                        |                                                    | AC, V <sub>(PVDD)</sub> = 16.5 V + 100 mV <sub>P-P</sub> , f <sub>(RIPPLE)</sub> from 10 Hz to 20 kHz |     | 50    |       |                |
| R <sub>DS(on)FET</sub> | Power stage FET on-resistance                      | T <sub>A</sub> = 25°C                                                                                 |     | 120   |       | mΩ             |
| R <sub>DS(on)TOT</sub> | Power stage total on-resistance (FET+bond+package) | T <sub>A</sub> = 25°C                                                                                 |     | 150   |       | mΩ             |
| I <sub>PK</sub>        | Peak output current                                | T <sub>A</sub> = 25°C                                                                                 |     | 5     |       | A              |
| f <sub>(HP)</sub>      | −3 dB high-pass filter corner frequency            | f = 44.1 kHz                                                                                          |     | 3.675 |       | Hz             |
|                        |                                                    | f = 48 kHz                                                                                            |     | 4     |       |                |
|                        |                                                    | f = 88.2 kHz                                                                                          |     | 7.35  |       |                |
|                        |                                                    | f = 96 kHz                                                                                            |     | 8     |       |                |
| f <sub>(PWM)</sub>     | PWM switching frequency                            | Values: 6, 8, 10, 12, 14, 16, 20, and 24                                                              | 6   |       | 24    | f <sub>S</sub> |


- (1) When PVDD is less than 5.5 V, the voltage regulator that operates the analog circuitry does not have enough headroom to maintain the nominal 5.4-V internal voltage. The lack of headroom causes a direct reduction in gain (approximately -0.8 dB at 5 V and -1.74 dB at 4.5 V), but the device functions properly down to  $V_{PVDD} = 4.5\text{ V}$ .

## 6.6 Timing Requirements

|                                     |                                                      |                                                                                                                    | MIN                   | NOM | MAX | UNIT |
|-------------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------|-----|-----|------|
| t <sub>ACTIVE</sub>                 | Shutdown to Active Time                              | From deassertion of SDZ (both pin and I <sup>2</sup> C register bit) until the Class-D amplifier begins switching. | 25                    |     |     | ms   |
| t <sub>WAKE</sub>                   | Wake Time                                            | From the deassertion of SLEEP until the Class-D amplifier starts switching.                                        | 1                     |     |     |      |
| t <sub>SLEEP</sub>                  | Sleep Time                                           | From the assertion of SLEEP until the Class-D amplifier stops switching.                                           | t <sub>vrmp</sub> + 1 |     |     |      |
| t <sub>MUTE</sub>                   | Play to Mute Time                                    | From the assertion of MUTE mode until the volume has ramped to the minimum.                                        | t <sub>vrmp</sub>     |     |     |      |
| t <sub>PLAY</sub>                   | Un-Mute to Play Time                                 | From the deassertion of MUTE until the volume has returned to its current setting.                                 | t <sub>vrmp</sub>     |     |     |      |
| t <sub>SD</sub>                     | Active to Shutdown Time                              | From the assertion of SDZ (pin or I <sup>2</sup> C register bit) until the Class-D amplifier stops switching.      | t <sub>vrmp</sub> + 1 |     |     |      |
| SERIAL AUDIO PORT                   |                                                      |                                                                                                                    |                       |     |     |      |
| t <sub>H_L</sub>                    | Time high and low, BCLK, LRCLK, SDIN inputs          |                                                                                                                    | 10                    |     |     | ns   |
| t <sub>SU</sub><br>t <sub>HLD</sub> | Setup and hold time. LRCLK, SDIN input to BCLK edge. | Input t <sub>RISE</sub> ≤ 1 ns, input t <sub>FALL</sub> ≤ 1 ns                                                     | 5                     |     |     | ns   |
|                                     |                                                      | Input t <sub>RISE</sub> ≤ 4 ns, input t <sub>FALL</sub> ≤ 4 ns                                                     | 8                     |     |     |      |
|                                     |                                                      | Input t <sub>RISE</sub> ≤ 8 ns, input t <sub>FALL</sub> ≤ 8 ns                                                     | 12                    |     |     |      |
| t <sub>RISE</sub>                   | Rise-time BCLK, LRCLK, SDIN inputs                   |                                                                                                                    | 8                     |     |     | ns   |
| t <sub>FALL</sub>                   | Fall-time BCLK, LRCLK, SDIN inputs                   |                                                                                                                    | 8                     |     |     |      |
| I <sup>2</sup> C CONTROL PORT       |                                                      |                                                                                                                    |                       |     |     |      |
| t <sub>BUS</sub>                    | Bus free time between start and stop conditions      |                                                                                                                    | 1.3                   |     |     | μs   |
| t <sub>HOLD1(I2C)</sub>             | Hold Time, SCL to SDA                                |                                                                                                                    | 80                    |     |     | ns   |
| t <sub>HOLD2(I2C)</sub>             | Hold Time, start condition to SCL                    |                                                                                                                    | 0.6                   |     |     | μs   |
| t <sub>START(I2C)</sub>             | I2C Startup Time after DVDD Power On Reset           |                                                                                                                    | 12                    |     |     | ms   |
| t <sub>RISE(I2C)</sub>              | Rise Time, SCL and SDA                               |                                                                                                                    | 300                   |     |     | ns   |
| t <sub>FALL(I2C)</sub>              | Fall Time, SCL and SDA                               |                                                                                                                    | 300                   |     |     | ns   |
| t <sub>SU1(I2C)</sub>               | Setup, SDA to SCL                                    |                                                                                                                    | 100                   |     |     | ns   |
| t <sub>SU2(I2C)</sub>               | Setup, SCL to start condition                        |                                                                                                                    | 0.6                   |     |     | μs   |
| t <sub>SU3(I2C)</sub>               | Setup, SCL to stop condition                         |                                                                                                                    | 0.6                   |     |     | μs   |
| t <sub>W(H)</sub>                   | Required pulse duration, SCL "HIGH"                  |                                                                                                                    | 0.6                   |     |     | μs   |
| t <sub>W(L)</sub>                   | Required pulse duration, SCL "LOW"                   |                                                                                                                    | 1.3                   |     |     | μs   |
| PROTECTION                          |                                                      |                                                                                                                    |                       |     |     |      |
| t <sub>FAULTZ</sub>                 | Amplifier fault time-out period                      | DC detect error                                                                                                    | 650                   |     |     | ms   |
|                                     |                                                      | OTE or OCE fault                                                                                                   | 1.3                   |     |     | s    |

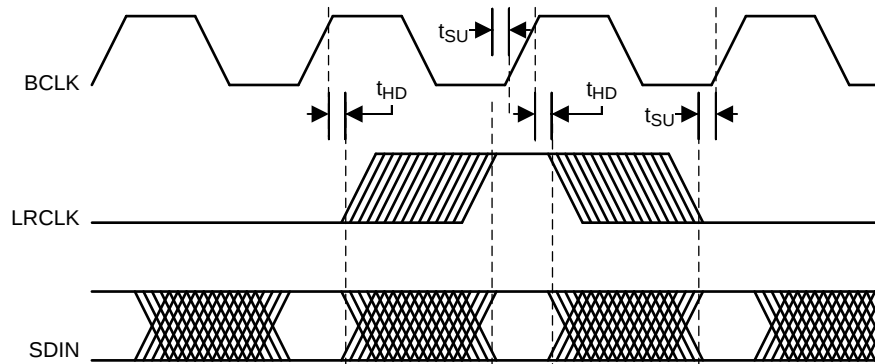


**图 1. SAIF Timing**

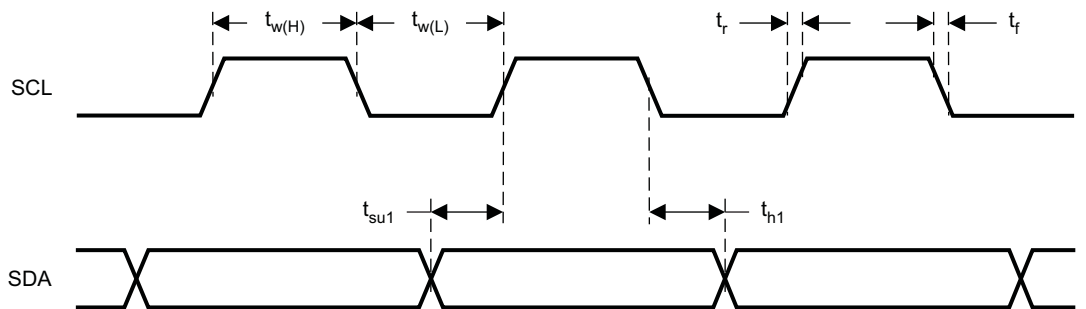

T0027-01

**图 2. SCL and SDA Timing**

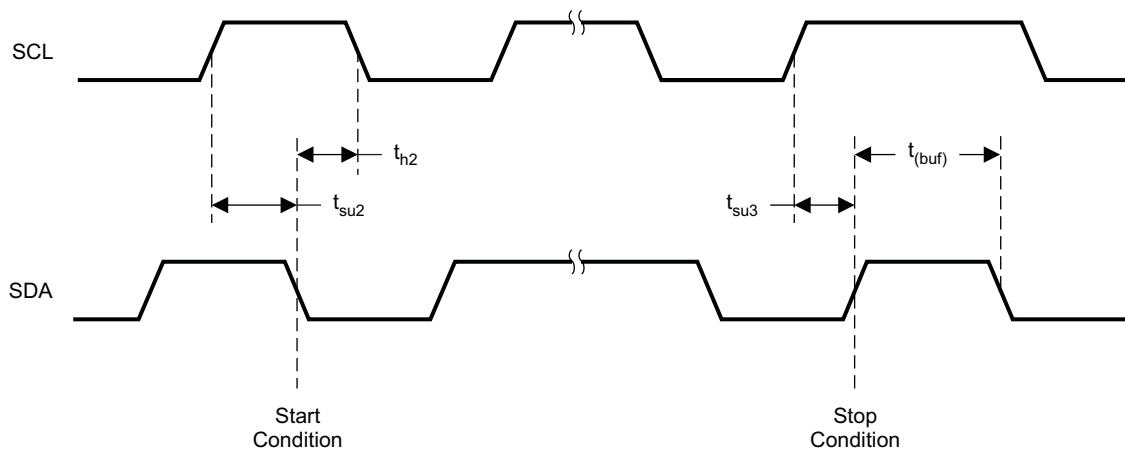

T0028-01

**图 3. Start and Stop Conditions Timing**

**TAS5720L, TAS5720M**

ZHCSET5B – MAY 2015 – REVISED FEBRUARY 2016

[www.ti.com.cn](http://www.ti.com.cn)

When SDZ is deasserted (and the device is not in sleep mode), the amplifier begins to switch after a period of  $t_{\text{ACTIVE}}$ . At this point, the volume ramps from  $-100$  dB to the programmed digital volume control (DVC) setting at a rate of  $0.5$  dB every eight sample periods. Ramping the volume prevents audible artifacts that can occur if discontinuous volume changes are applied while audio is being played back. This period,  $t_{\text{VRMP}}$ , depends on the DVC setting and sample rate. Typical values for  $t_{\text{VRMP}}$  for a DVC of  $0$  dB are shown in [Timing Requirements](#). 图 4 illustrates mode timing.

The time to enter or exit sleep or mute and the time to enter shutdown are dominated by  $t_{\text{VRMP}}$ . 表 1 lists the timing parameters based on  $t_{\text{VRMP}}$ .

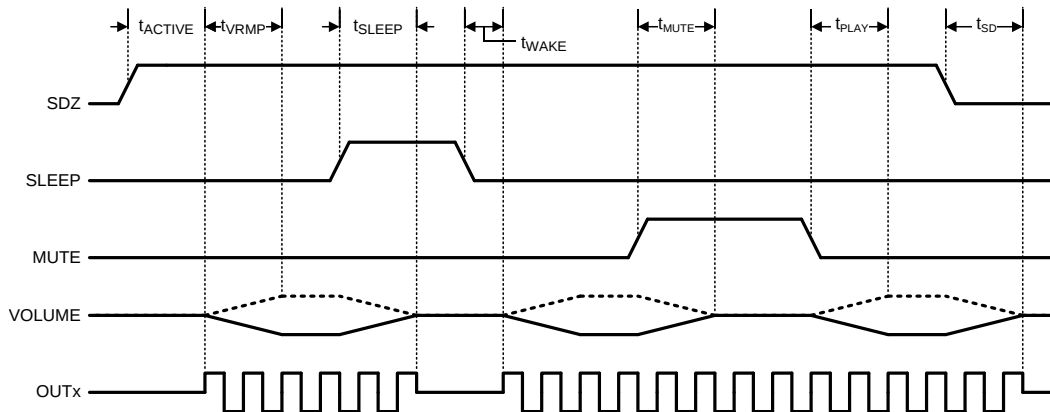


图 4. Mode Timing

表 1. Typical DVC Ramp Times

| SAMPLE<br>RATE (kHz) | RAMP TIMES ( $t_{\text{VRMP}}$ )<br>FROM $-100$ dB to $0$ dB (ms) |
|----------------------|-------------------------------------------------------------------|
| 44.1                 | 36.3                                                              |
| 48                   | 33.3                                                              |
| 88.2                 | 18.1                                                              |
| 96                   | 16.7                                                              |

## 6.7 Typical Characteristics

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

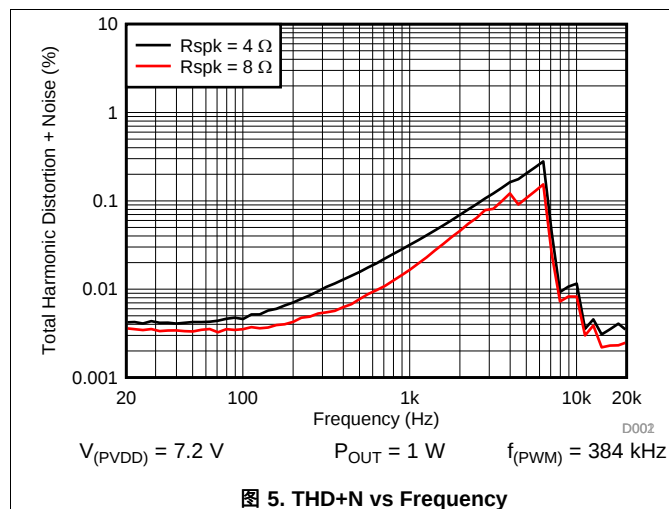


图 5. THD+N vs Frequency

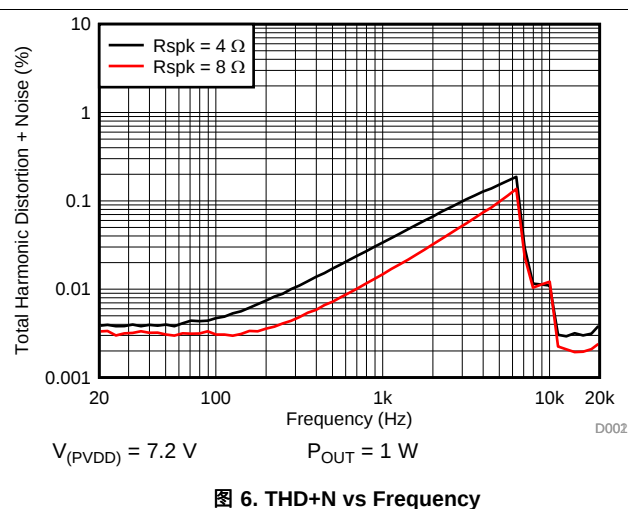


图 6. THD+N vs Frequency

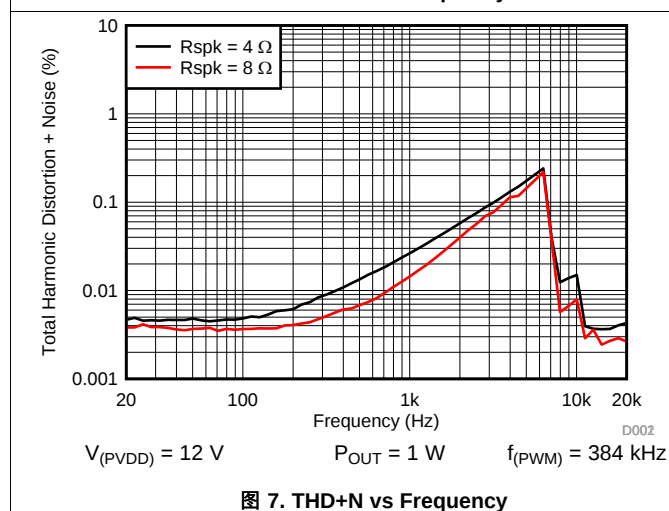


图 7. THD+N vs Frequency

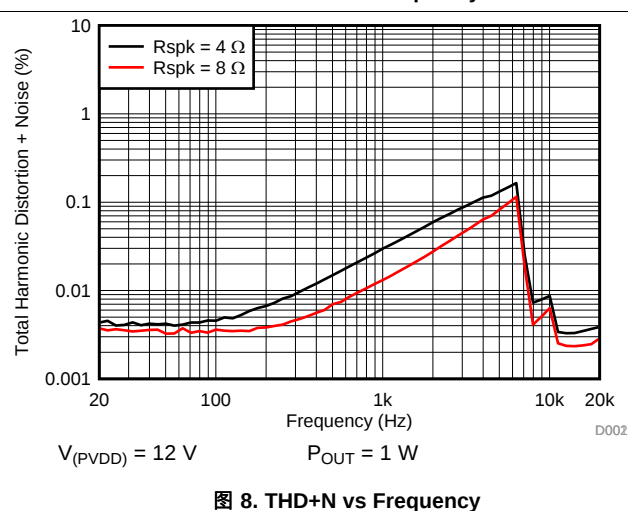


图 8. THD+N vs Frequency

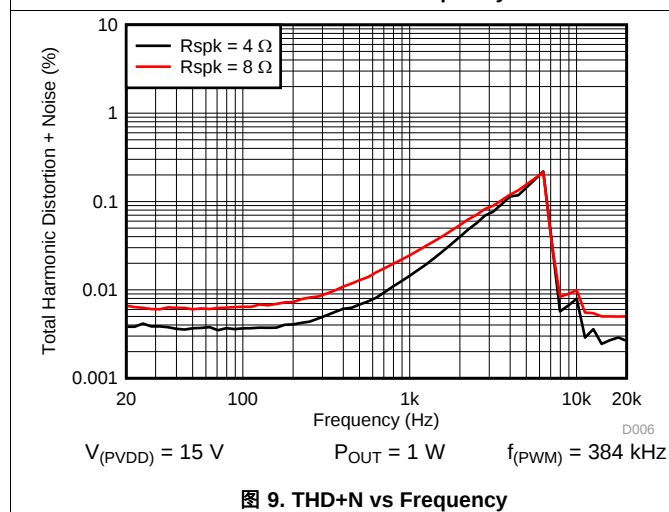


图 9. THD+N vs Frequency

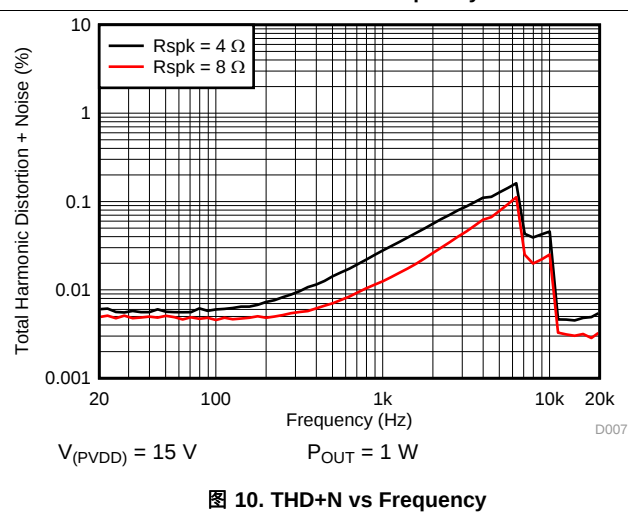


图 10. THD+N vs Frequency

## Typical Characteristics (接下页)

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

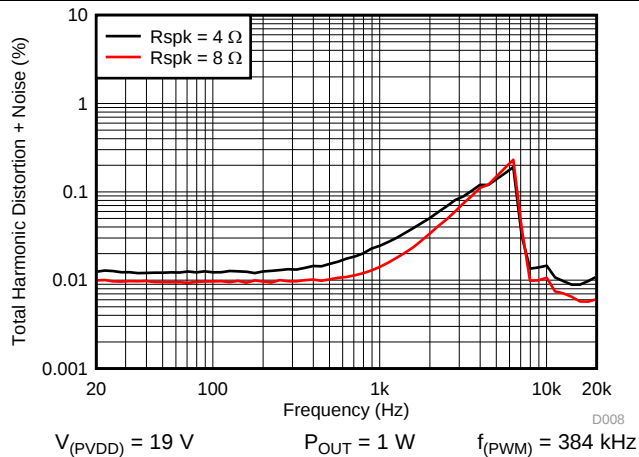


图 11. THD+N vs Frequency

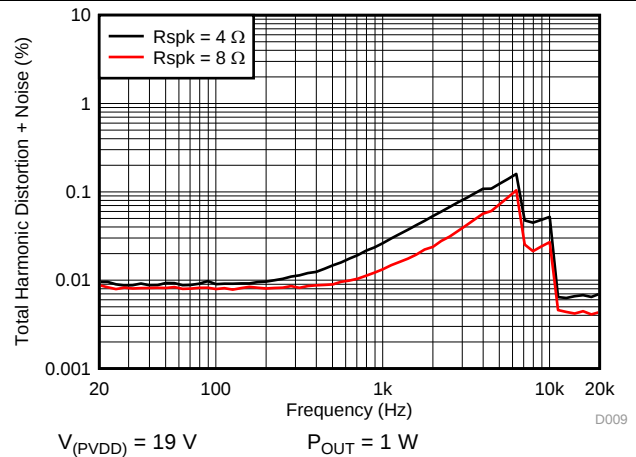


图 12. THD+N vs Frequency

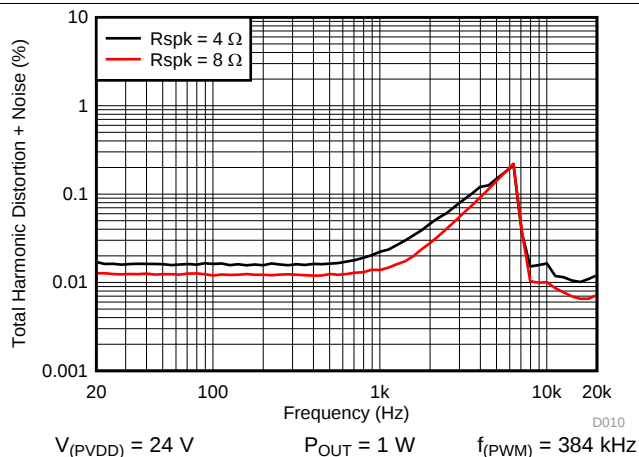


图 13. THD+N vs Frequency

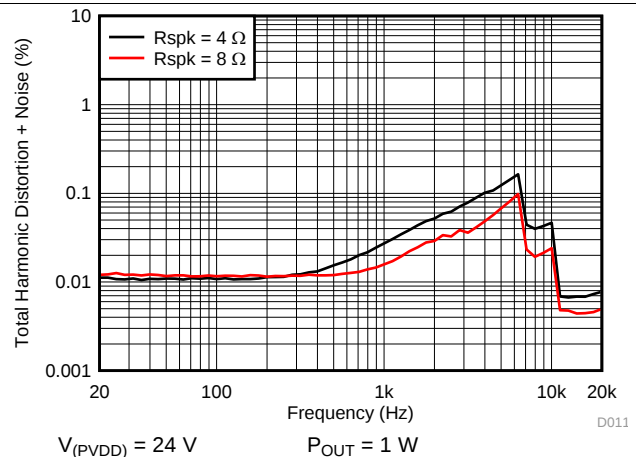


图 14. THD+N vs Frequency

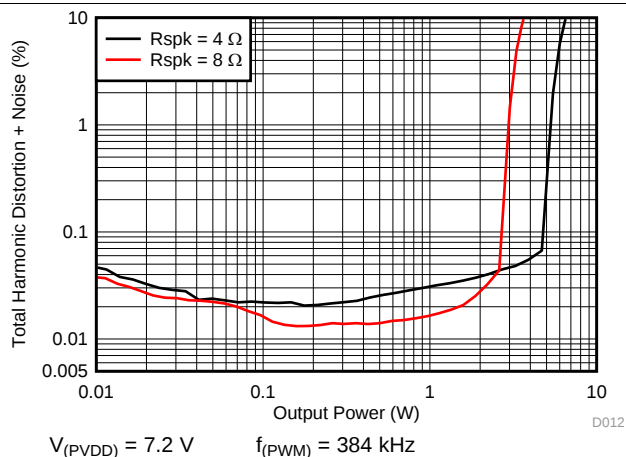


图 15. THD+N vs Output Power

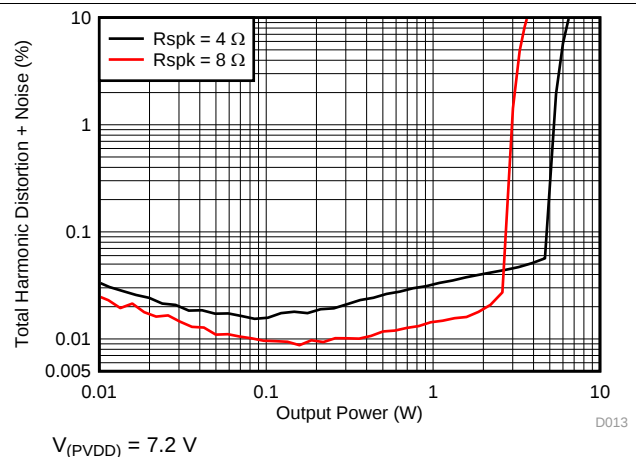


图 16. THD+N vs Output Power

## Typical Characteristics (接下页)

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

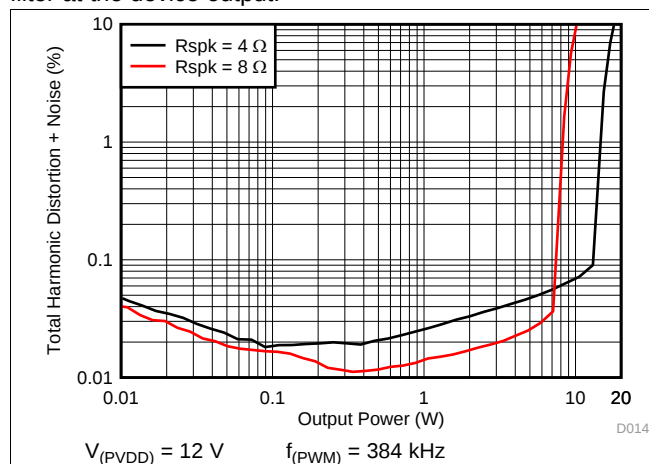


图 17. THD+N vs Output Power

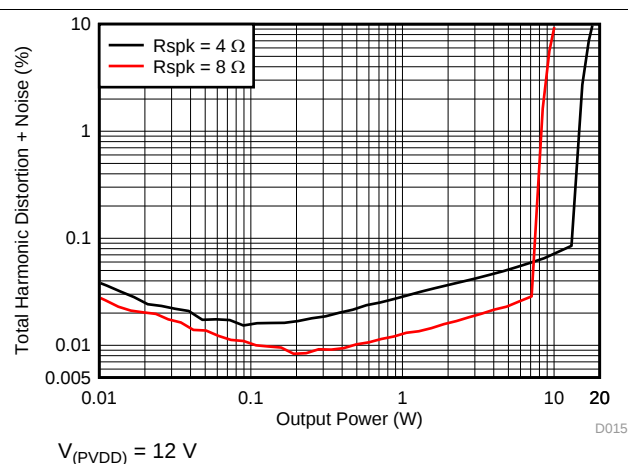


图 18. THD+N vs Output Power

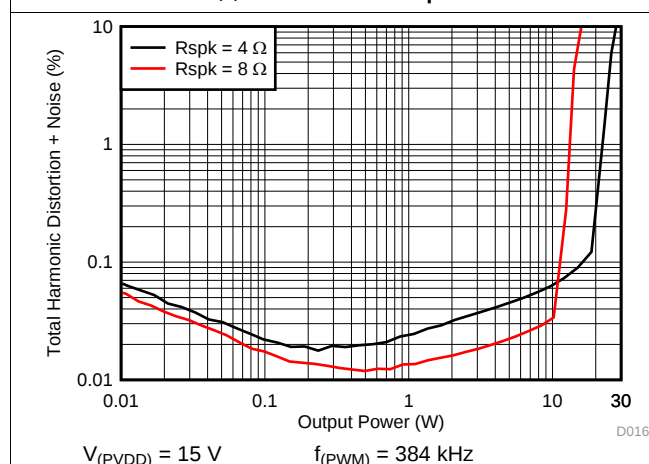


图 19. THD+N vs Output Power

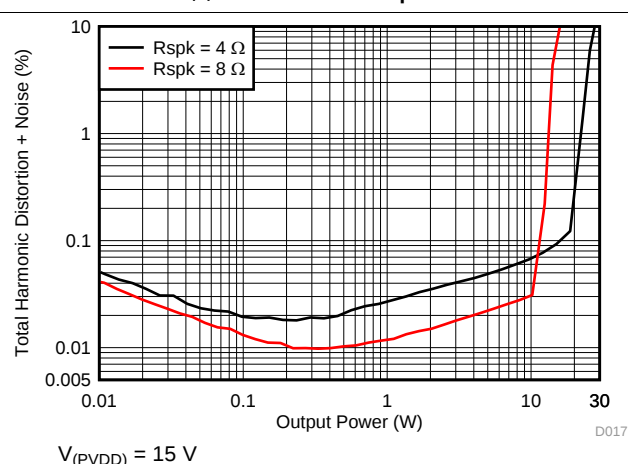


图 20. THD+N vs Output Power

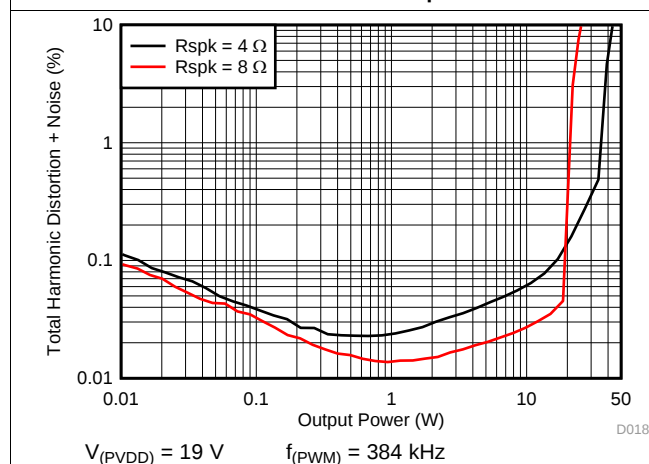


图 21. THD+N vs Output Power

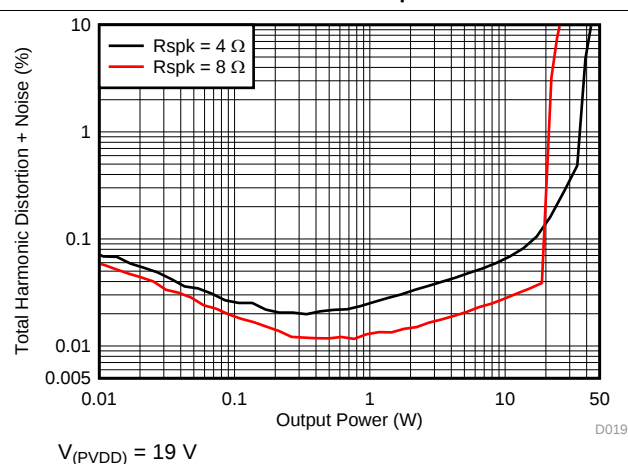


图 22. THD+N vs Output Power

## Typical Characteristics (接下页)

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

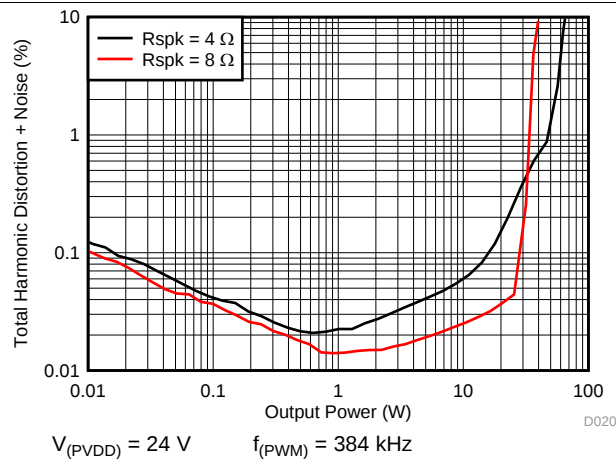


图 23. THD+N vs Output Power

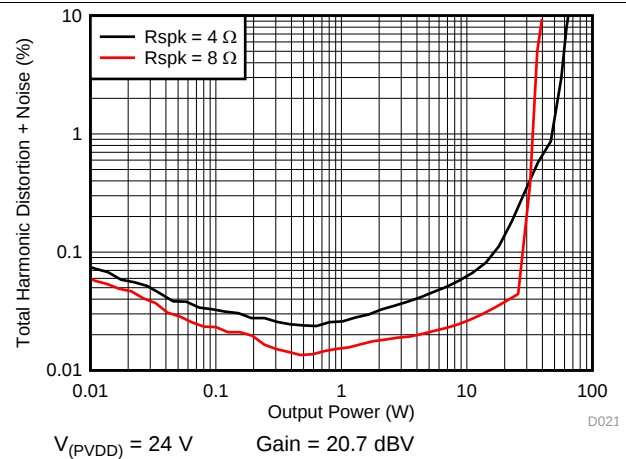


图 24. THD+N vs Output Power

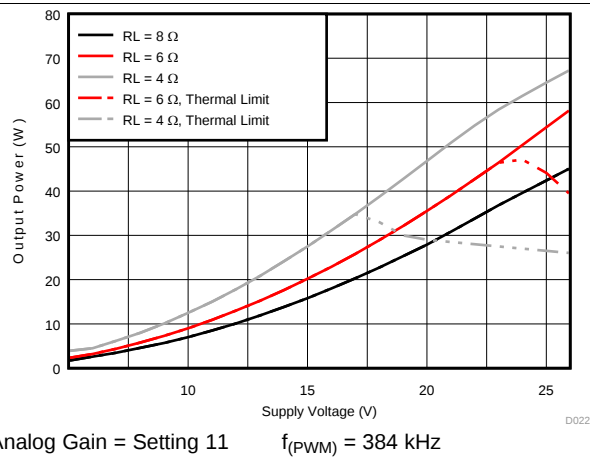


图 25. Output Power vs Supply Voltage

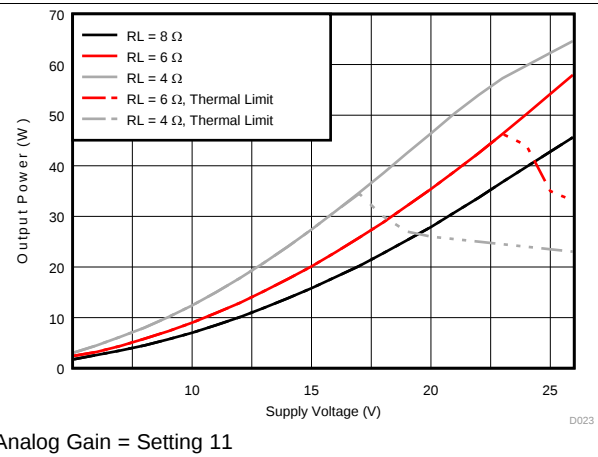


图 26. Output Power vs Supply Voltage

## Typical Characteristics (接下页)

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

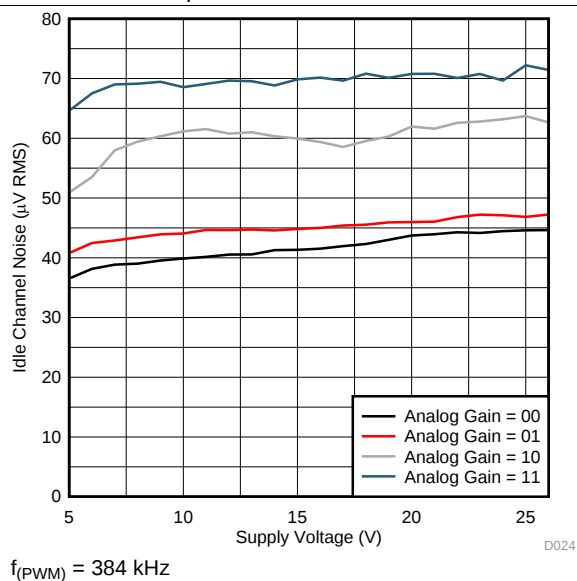


图 27. A-Weighted Idle Channel Noise vs Supply Voltage

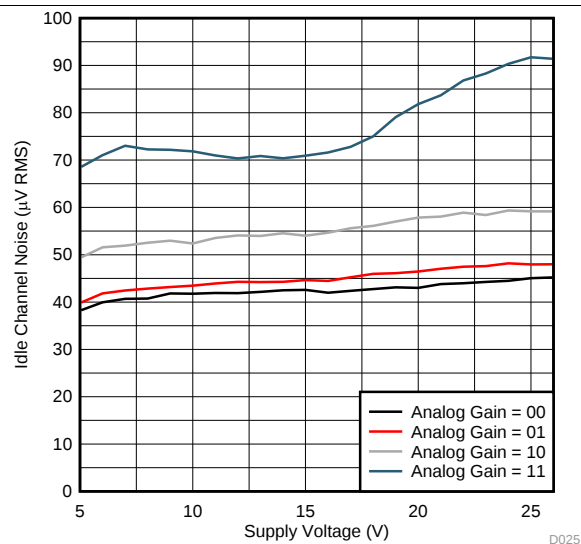


图 28. Efficiency vs Output Power

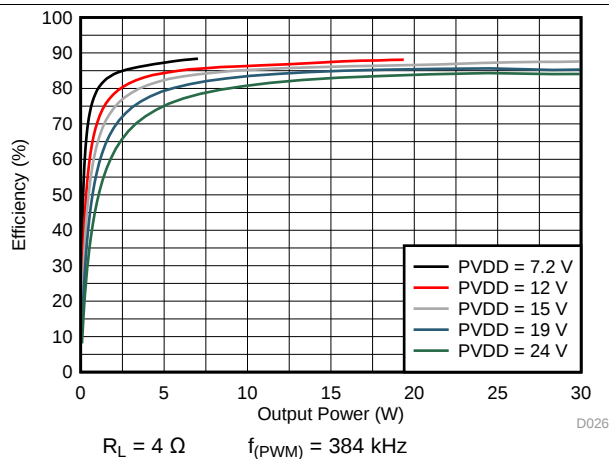


图 29. Efficiency vs Output Power

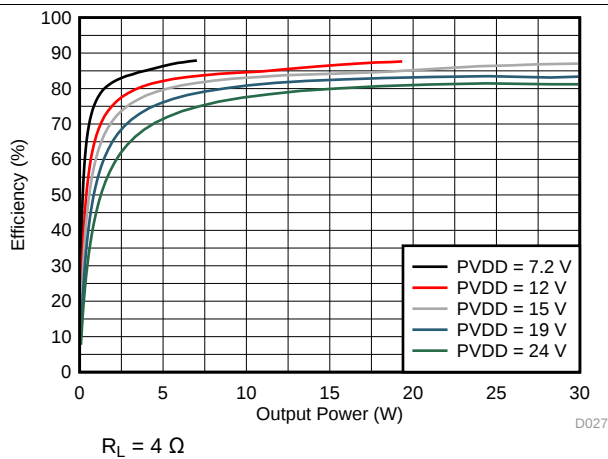


图 30. Efficiency vs Output Power

## Typical Characteristics (接下页)

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ , Gain = 20.7 dBV, SDZ = 1, Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a 15- $\mu\text{H}$ , 0.68- $\mu\text{F}$  reconstruction filter at the device output.

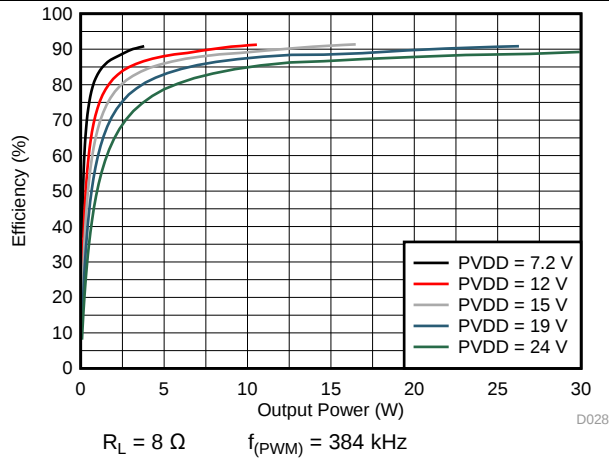


图 31. Efficiency vs Output Power

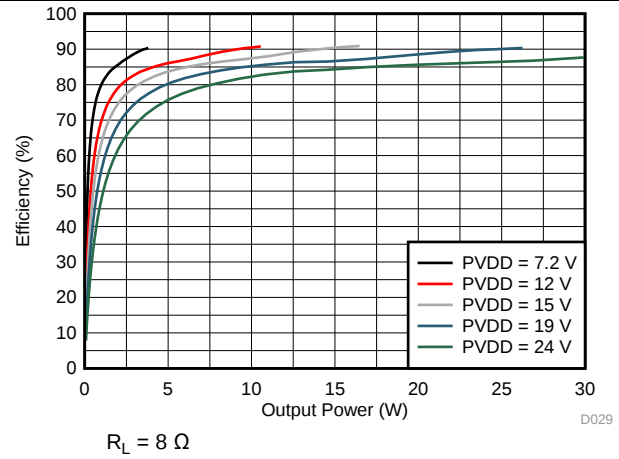


图 32. Efficiency vs Output Power

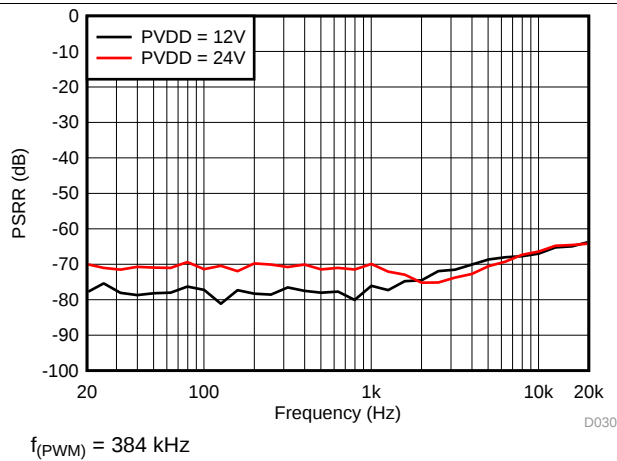


图 33. PVDD PSRR vs Frequency

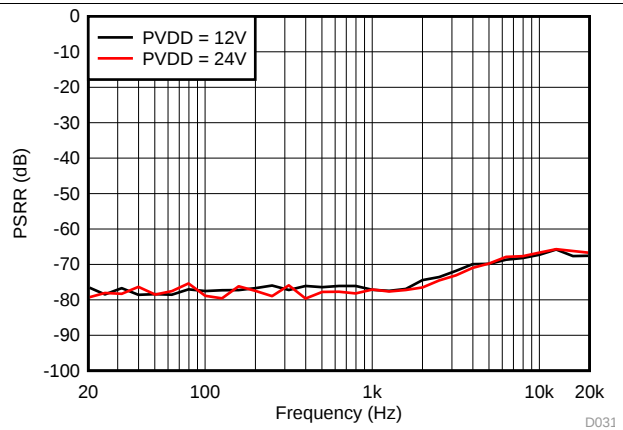


图 34. PVDD PSRR vs Frequency

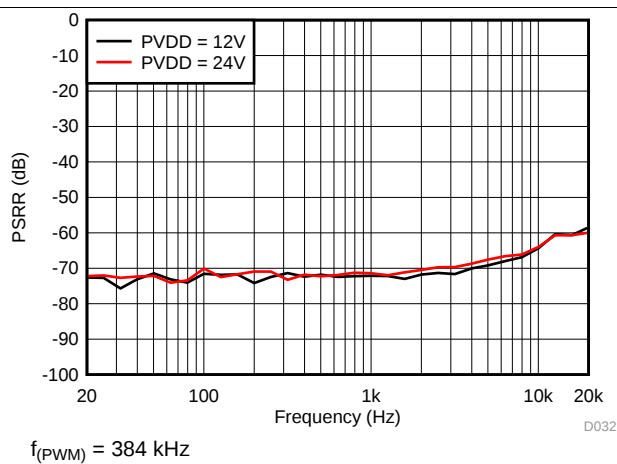


图 35. DVDD PSRR vs Frequency

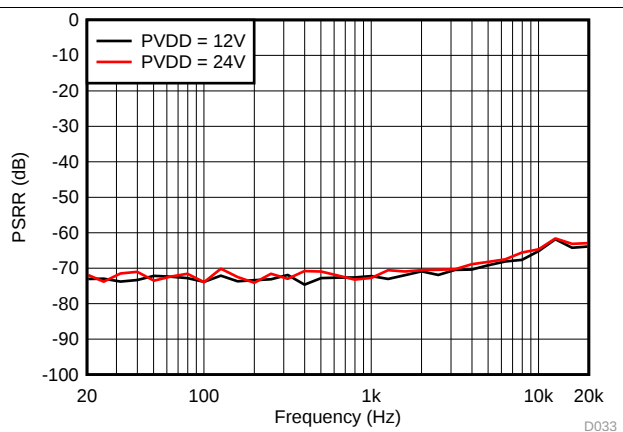


图 36. DVDD PSRR vs Frequency

## Typical Characteristics (接下页)

$T_A = 25^\circ\text{C}$ ,  $V_{(PVDD)} = 15\text{ V}$ ,  $V_{(DVDD)} = 3.3\text{ V}$ ,  $R_L = 4\ \Omega$ ,  $f_{IN} = 1\text{ kHz}$ ,  $f_s = 48\text{ kHz}$ ,  $f_{(PWM)} = 768\text{ kHz}$ ,  $\text{Gain} = 20.7\text{ dBV}$ ,  $\text{SDZ} = 1$ , Measured with an Audio Precision SYS-2722 High-Performance Audio Analyzer and using a  $15\text{-}\mu\text{H}$ ,  $0.68\text{-}\mu\text{F}$  reconstruction filter at the device output.

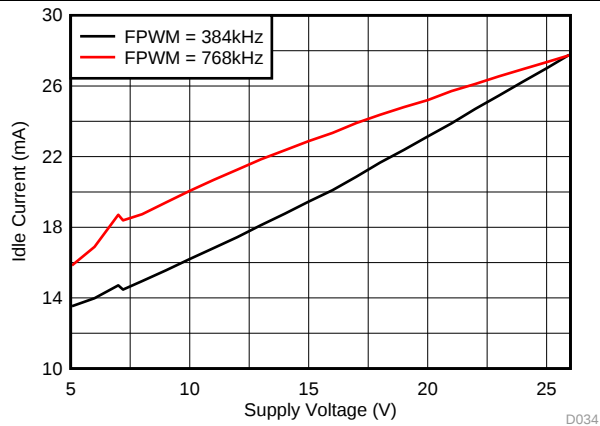


图 37. Supply Idle Current vs PVDD

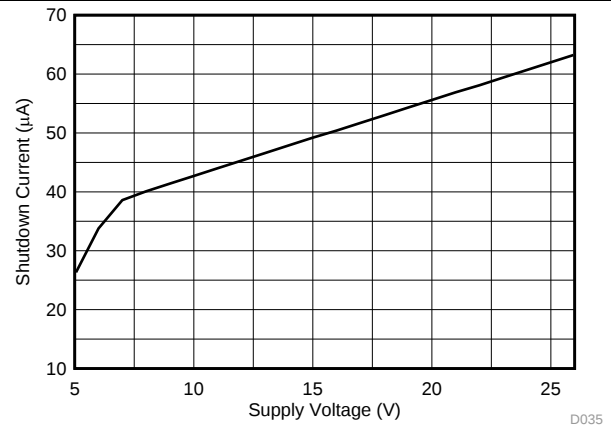



图 38. Shutdown Current vs PVDD

## 7 Detailed Description

### 7.1 Overview

The TAS5720L/M device is a high-efficiency mono Class-D audio power amplifier optimized for high-transient power capability to utilize the dynamic power headroom of small loudspeakers. It's capable of delivering more than 15-W continuously into a 4-Ω speaker.

### 7.2 Functional Block Diagram

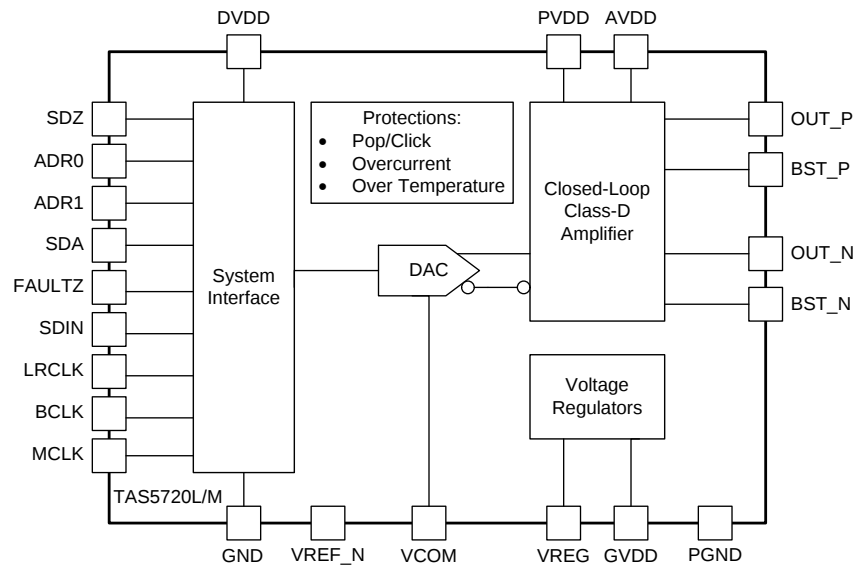

### 7.3 Feature Description

#### 7.3.1 Adjustable I<sup>2</sup>C Address

The TAS5720L/M device has two address pins, which allow up to 8 I<sup>2</sup>C addressable devices to share a common TDM bus. 表 2 lists each I<sup>2</sup>C Device ID setting.

注

The I<sup>2</sup>C Device ID is the 7 most significant bits of the 8-bit address transaction on the bus (with the read/write bit being the least significant bit). For example, a Device ID of 0x6C would be read as 0xD8 when the read/write bit is 0.

表 2. I<sup>2</sup>C Device Identifier (ID) Generation

| ADR1         | ADR0          | I2C_DEV_ID | DEFAULT TDM SLOT |
|--------------|---------------|------------|------------------|
| Short to GND | Short to GND  | 0x6C       | 0                |
|              | 22-kΩ to GND  | 0x6D       | 1                |
|              | 22-kΩ to DVDD | 0x6E       | 2                |
|              | Short to DVDD | 0x6F       | 3                |
| 22-kΩ to GND | Short to GND  | 0x70       | 4                |
|              | 22-kΩ to GND  | 0x71       | 5                |
|              | 22-kΩ to DVDD | 0x72       | 6                |
|              | Short to DVDD | 0x73       | 7                |

Use a 22-k $\Omega$  resistor with a 5% (or better) tolerance to operate as a pull-up or pull-down resistor. By default, the device uses the TDM time slot equal to the offset from the base I<sup>2</sup>C Device ID (see 表 2). The TDM slot can also be manually configured by setting the TDM\_CFG\_SRC bit high (bit 6, reg 0x02) and programming the TDM\_SLOT\_SELECT[2:0] bits to the desired slot (bits 0-2, reg 0x03).

For 2-channel, I<sup>2</sup>S operation, TDM slots 0 and 1 correspond to right and left channels respectively. For left and right justified formats, TDM slots 0 and 1 correspond to left and right channels respectively.

### 7.3.2 I<sup>2</sup>C Interface

The TAS5720L/M device has a bidirectional I<sup>2</sup>C interface that is compatible with the Inter-Integrated Circuit (I<sup>2</sup>C) bus protocol and supports both 100-kHz and 400-kHz data transfer rates. This slave-only device does not support a multimaster bus environment or wait-state insertion. The control interface is used to program the registers of the device and to read device status.

The I<sup>2</sup>C bus employs two signals, SDA (data) and SCL (clock), to communicate between integrated circuits in a system. Data is transferred on the bus serially, one bit at a time. The address and data can be transferred in byte (8-bit) format, with the most-significant bit (MSB) transferred first. In addition, each byte transferred on the bus is acknowledged by the receiving device with an acknowledge bit. Each transfer operation begins with the master device driving a start condition on the bus and ends with the master device driving a stop condition on the bus. The bus uses transitions on the data pin (SDA) while the clock (SCL) is "HIGH" to indicate start and stop conditions. A high-to-low transition on SDA indicates a start and a low-to-high transition indicates a stop. Normal data-bit transitions must occur within the low time of the clock period. The conditions are shown in 图 39. The master generates the 7-bit slave address and the read/write (R/W) bit to open communication with another device and then waits for an acknowledge condition. The TAS5720L/M device holds SDA "LOW" during the acknowledge clock period to indicate an acknowledgment. When this hold occurs, the master transmits the next byte of the sequence. All compatible devices share the same signals via a bidirectional bus using a wired-AND connection. An external pull-up resistor must be used for the SDA and SCL signals to set the "HIGH" level for the bus.


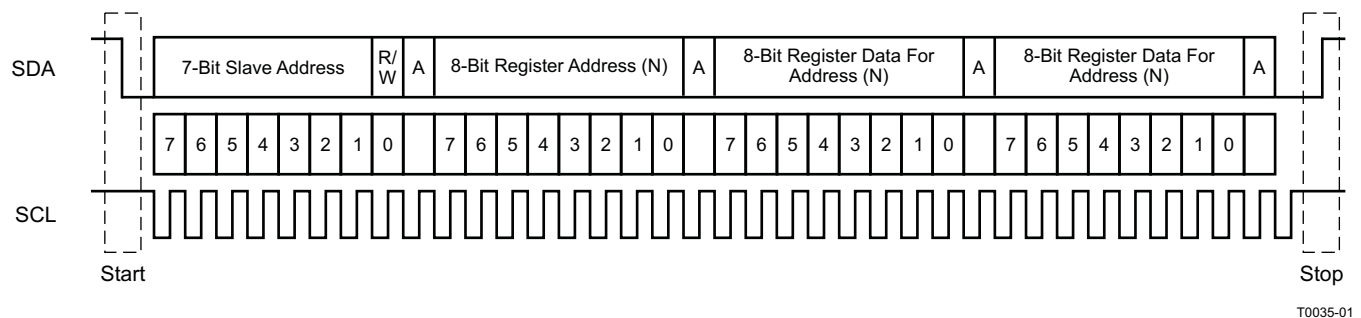


图 39. Typical I<sup>2</sup>C Timing Sequence

Any number of bytes can be transmitted between start and stop conditions. When the last word transfers, the master generates a stop condition to release the bus. A generic data transfer sequence is shown in 图 39.


### 7.3.2.1 Writing to the I<sup>2</sup>C Interface

As shown in Figure 40, a single-byte data-write transfer begins with the master device transmitting a start condition followed by the I<sup>2</sup>C bit and the read/write bit. The read/write bit determines the direction of the data transfer. For a data-write transfer, the read/write bit is a 0. After receiving the correct I<sup>2</sup>C bit and the read/write bit, the TAS5720L/M device responds with an acknowledge bit. Next, the master transmits the address byte corresponding to the TAS5720L/M device register being accessed. After receiving the address byte, the TAS5720L/M device again responds with an acknowledge bit. Next, the master device transmits the data byte to be written to the memory address being accessed. After receiving the data byte, the TAS5720L/M device again responds with an acknowledge bit. Lastly, the master device transmits a stop condition to complete the single-byte data-write transfer.

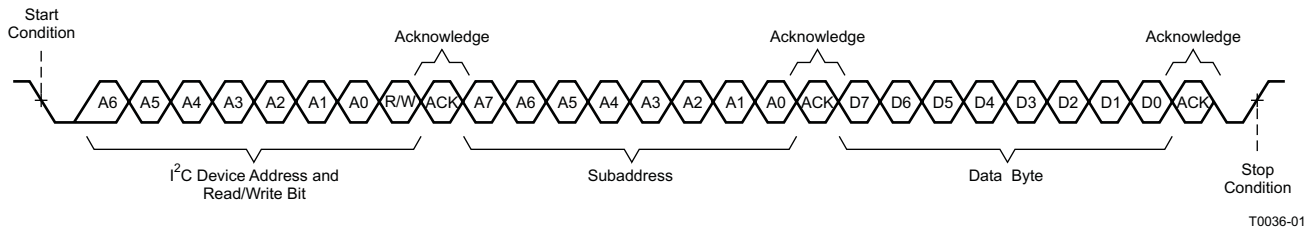

**图 40. Single Byte Write Transfer Timing**

A multi-byte data write transfer is identical to a single-byte data write transfer except that multiple data bytes are transmitted as shown in Figure 41. After receiving each data byte, the TAS5720L/M device responds with an acknowledge bit. Sequential data bytes are written to sequential addresses.

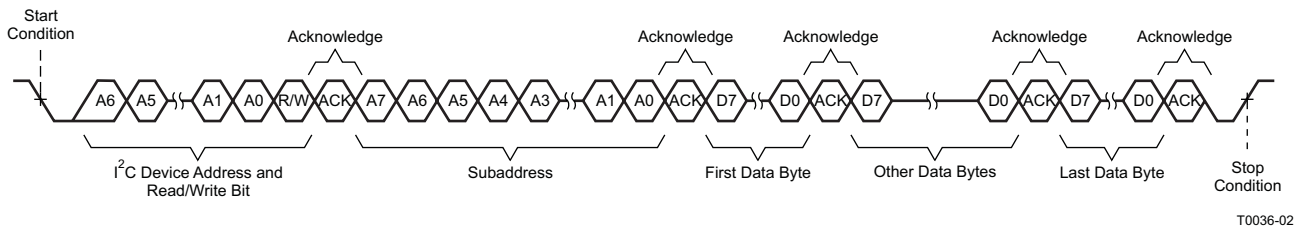

**图 41. Multi-Byte Write Transfer Timing**

### 7.3.2.2 Reading from the I<sup>2</sup>C Interface

As shown in 图 41, a data-read transfer begins with the master device transmitting a start condition, followed by the I<sup>2</sup>C device address and the read/write bit. For the data read transfer, both a write followed by a read are actually done. Initially, a write is done to transfer the address byte of the internal register to be read. As a result, the read/write bit becomes a 0. After receiving the TAS5720L/M device address and the read/write bit, TAS5720L/M device responds with an acknowledge bit. In addition, after sending the internal memory address byte or bytes, the master device transmits another start condition followed by the TAS5720L/M device address and the read/write bit again. This time, the read/write bit becomes a 1, indicating a read transfer. After receiving the address and the read/write bit, the TAS5720L/M device again responds with an acknowledge bit. Next, the TAS5720L/M device transmits the data byte from the register being read. After receiving the data byte, the master device transmits a not-acknowledge followed by a stop condition to complete the data-read transfer.

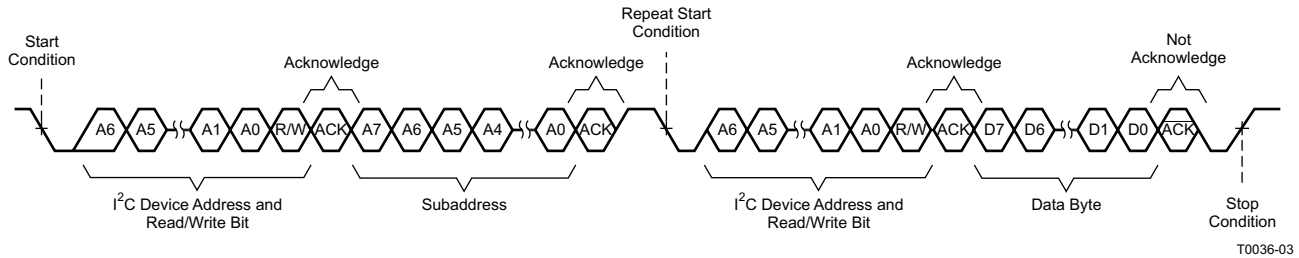


图 42. Single Byte Read Transfer Timing

A multiple-byte data read transfer is identical to a single-byte data read transfer except that multiple data bytes are transmitted by the TAS5720L/M to the master device as shown 图 43. Except for the last data byte, the master device responds with an acknowledge bit after receiving each data byte.

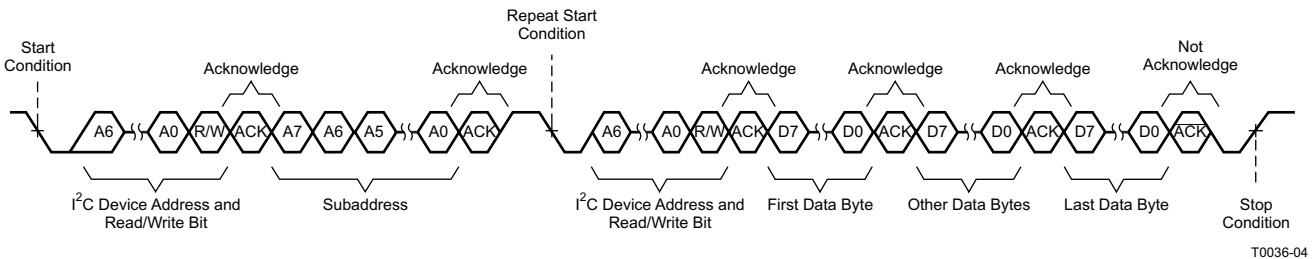


图 43. Multi-Byte Read Transfer Timing

### 7.3.3 Serial Audio Interface (SAIF)

The TAS5720L/M device SAIF supports a variety of standard stereo serial audio formats including I<sup>2</sup>S, left-justified and Right Justified. The device also supports a time division multiplexed (TDM) format that is capable of transporting up to 8 channels of audio data on a single bus. LRCLK and SDIN are sampled on the rising edge of BCLK.


For the stereo formats (I<sup>2</sup>S, left-justified and right-justified), the TAS5720L/M device supports BCLK to LRCLK ratios of 32, 48 and 64. If the BCLK to LRCLK ratio is 64, MCLK can be tied directly to BCLK. Otherwise MCLK must be driven externally. The valid MCLK to LRCLK ratios are 64, 128, 256 and 512 as long as the frequency of MCLK is 25MHz or less.

For TDM operation, the TAS5720L/M device supports 4 or 8 channels for single speed (44.1/48 kHz) and double speed (88.2/96 kHz) sample rates. Each channel occupies a 32-bit time slot, therefore valid BCLK to LRCLK ratios are 128 and 256. MCLK can be tied to BCLK for all TDM modes or driven externally. If MCLK is driven externally, the MCLK to LRCLK ratio should be 64, 128, 256 or 512 and MCLK should be no faster than 25MHz.

The TAS5720L/M device selects the channel for playback based on either the I<sup>2</sup>C base address offset or based on a dedicated time slot selection register. See the [Adjustable I<sup>2</sup>C Address](#) section for more information.

### 7.3.3.1 Stereo I<sup>2</sup>S Format Timing

图 44 illustrates the timing of the stereo I<sup>2</sup>S format with 64 BCLKs per LRCLK. Two's complement data is transmitted MSB to LSB with the left channel word beginning one BCLK after the falling edge of LRCLK and the right channel beginning one BCLK after the rising edge of LRCLK. Because data is MSB aligned to the beginning of word transmission, data precision does not be configured. Set the SAIF\_FORMAT[2:0] register bits to I<sup>2</sup>S (register 0x02, bits 2:0=3'b100).

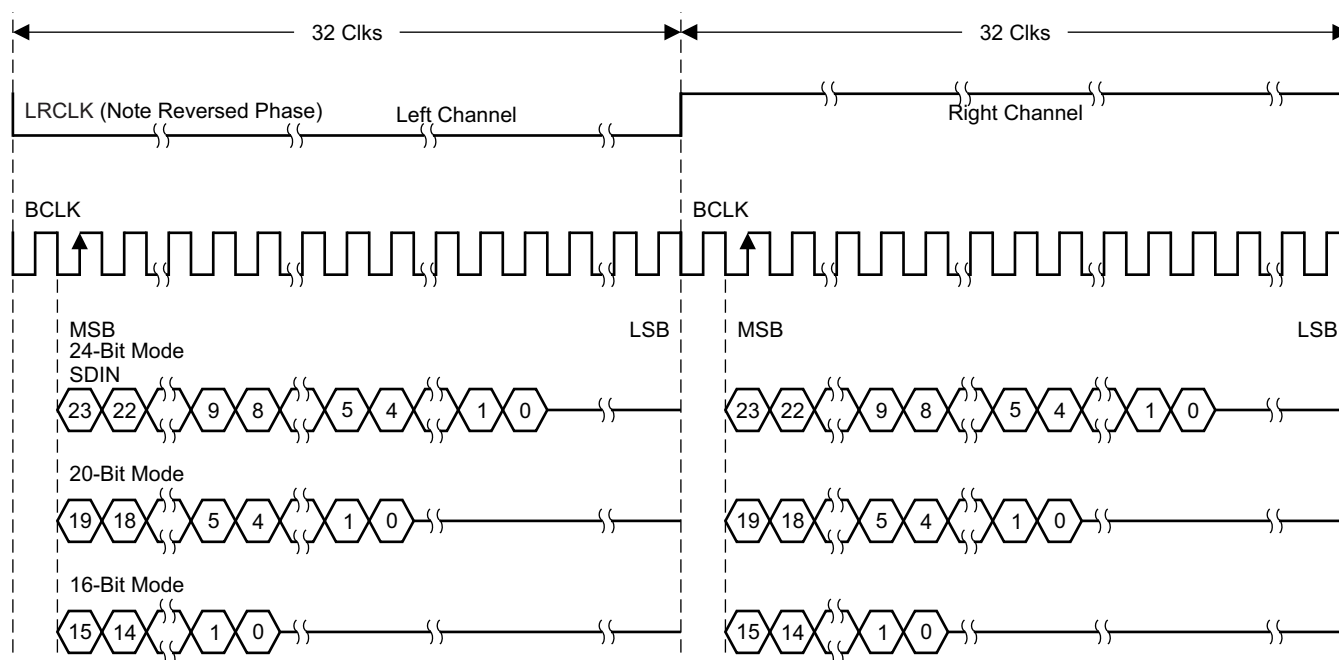


A. Data presented in two's-complement form with most significant bit (MSB) first.

图 44. I<sup>2</sup>S 64-f<sub>sw</sub> Format

### 7.3.3.2 Stereo Left-Justified Format Timing

The stereo left justified format is very similar to the I<sup>2</sup>S format timing, except the data word begins transmission at the same cycle that LRCLK toggles (when it is shifted by one bit from I<sup>2</sup>S). The phase of LRCLK is also opposite of I<sup>2</sup>S. The left channel begins transmission when LRCLK transitions from low to high and the right channel begins transmission when LRCLK transitions from high-to-low. Set the SAIF\_FORMAT[2:0] register bits to left-justified (register 0x02, bits 2:0=3'b101). The timing is illustrated in 图 45.

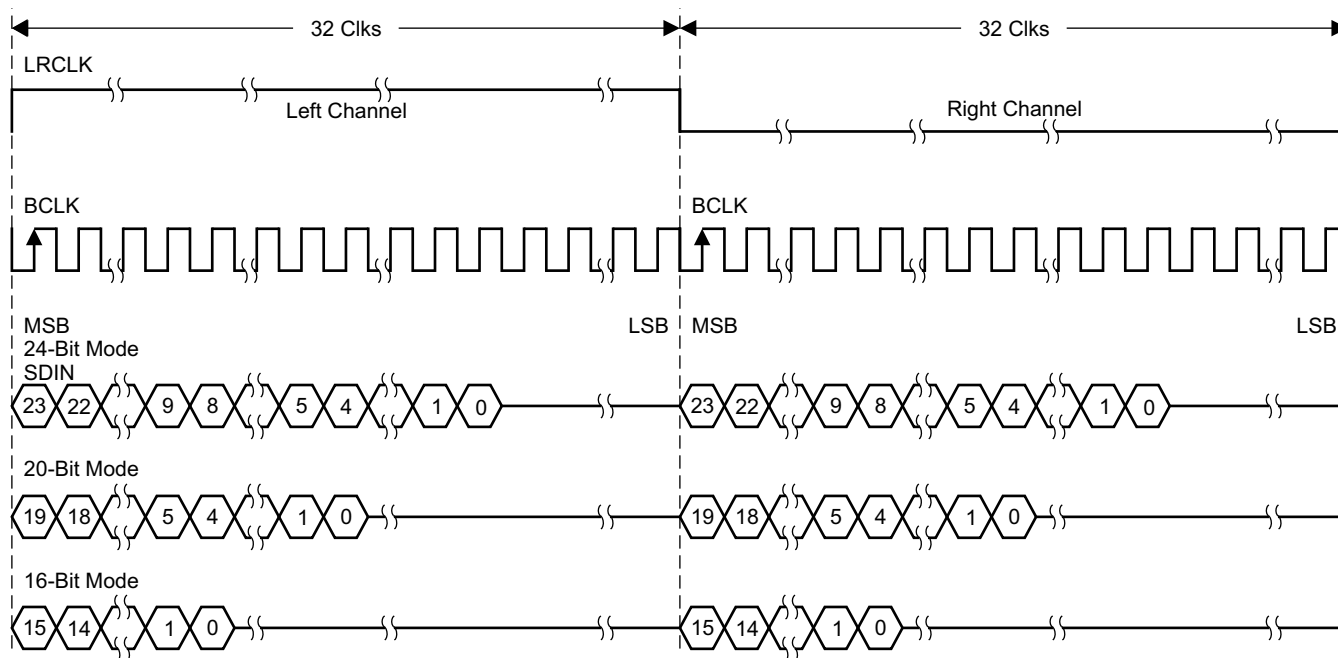

A. Data presented in two's-complement form with most significant bit (MSB) first.

**图 45. Left-Justified 64-f<sub>sw</sub> Format**

### 7.3.3.3 Stereo Right-Justified Format Timing

The stereo right justified format aligns the LSB of left channel data to the high to low transition of LRCLK and the LSB of the right channel data to the low to high transition of LRCLK. To insure data is received correctly, the SAIF must be configured for the proper data precision. The TAS5720L/M supports 16, 18, 20 and 24-bit data precision in right justified format. Set the SAIF\_FORMAT[2:0] register bits (register 0x02, bits 2:0) to the appropriate right-justified setting based on bit precision (value=3'b000 for 24-bit, 3'b001 for 20-bit, 3'b010 for 18-bit and 3'b011 for 16-bit). The timing is illustrated in 图 46.


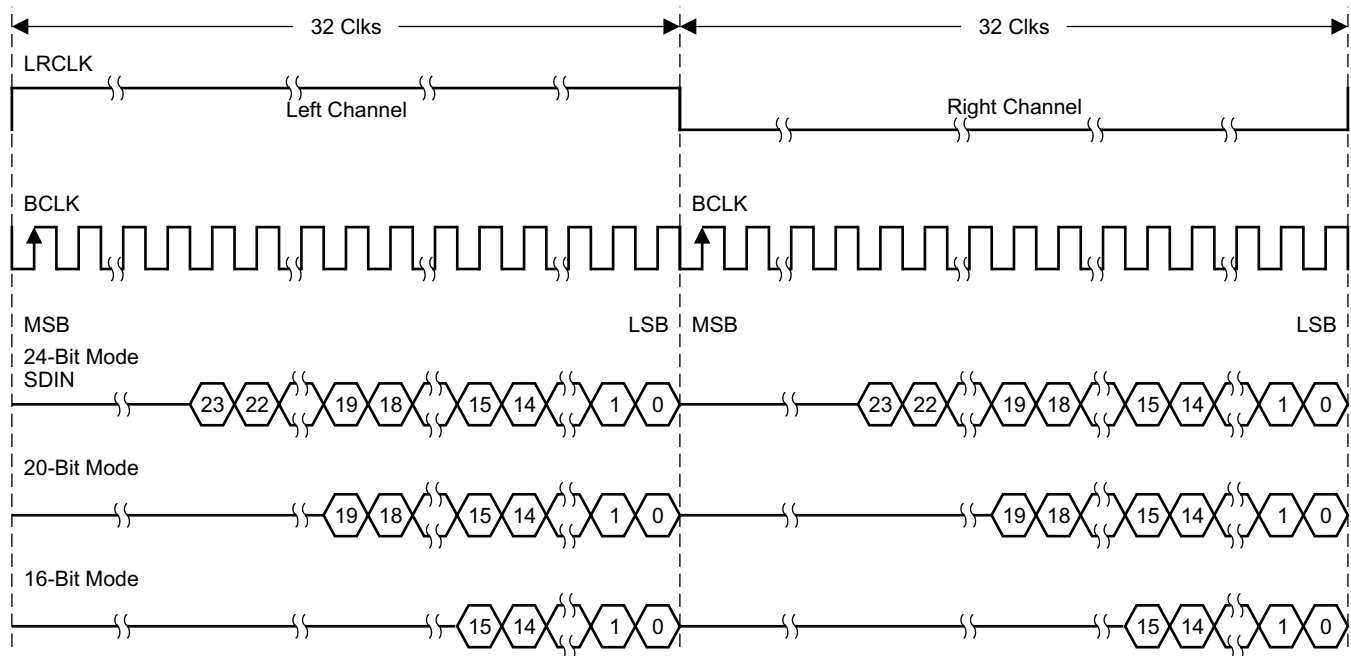


图 46. Right-Justified 64-f<sub>sw</sub> Format

### 7.3.3.4 TDM Format Timing


A TDM frame begins with the low to high transition of LRCLK. As long as LRCLK is high for at least one BCLK period and low for one BCLK period, duty cycle is irrelevant. The SAIF automatically detects the number of time slots as long as valid BCLK to LRCLK ratios are utilized (see [Serial Audio Interface \(SAIF\)](#)).

For I<sup>2</sup>S aligned TDM operation (when time slot 0 begins one clock cycle after the low to high transition of LRCLK, set SAIF\_FORMAT[2:0] register bits to I2S (register 0x02, bits 2:0=3'b100). Data is MSB aligned within the 32-bit time slots, therefore data precision is not required to be configured. The TDM format timing is illustrated in [图 47](#).

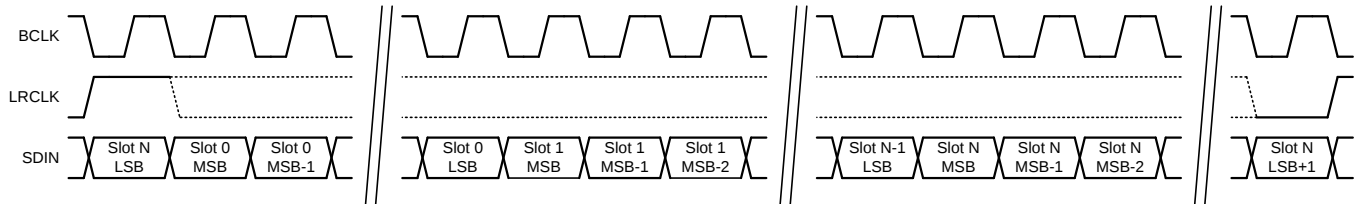

**图 47. TDM I<sup>2</sup>S Format**

For left-justified TDM operation (when time slot 0 begins the cycle LRCLK transitions from low to high), SAIF\_FORMAT[2:0] register bits to left-justified (register 0x02, bits 2:0=3'b101). As with I2S, data is MSB aligned. The timing is illustrated in [图 48](#).

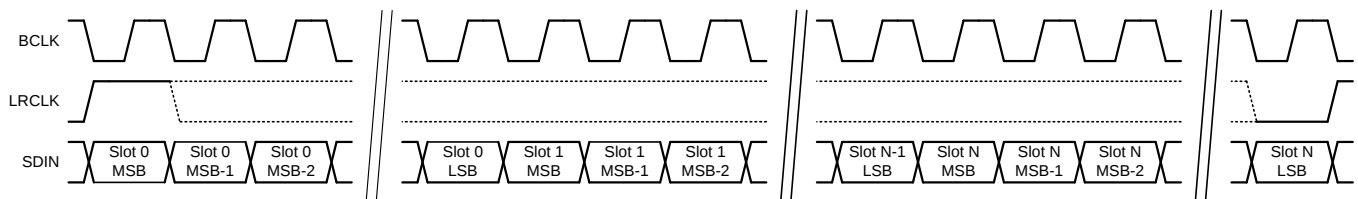

**图 48. TDM Left- and Right-Justified Format**

For right-justified TDM operation (when time slot 0 begins the cycle LRCLK transitions from low to high), data is LSB aligned to the 32-bit time slot. As with stereo right-justified formats, the TAS5720L/M must have the data precision configured. Set the SAIF\_FORMAT[2:0] register bits (register 0x02, bits 2:0) to the appropriate right-justified setting based on bit precision (value=3'b000 for 24-bit, 3'b001 for 20-bit, 3'b010 for 18-bit and 3'b011 for 16-bit). The timing shown in [图 48](#) is the same as left-justified TDM, with the data LSB aligned.

### 7.3.4 Audio Signal Path

图 49 illustrates the audio signal flow from the TDM SAIF to the speaker.

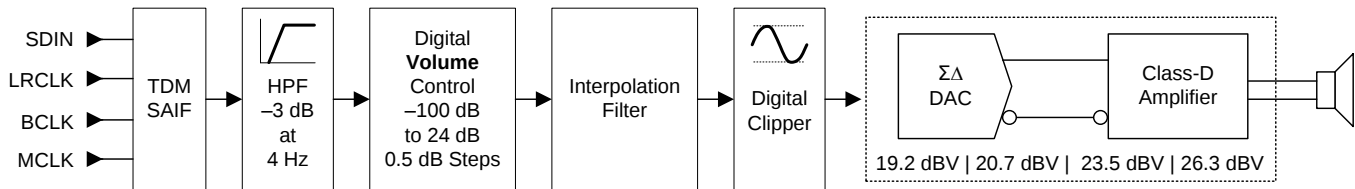


图 49. Audio Signal Path

#### 7.3.4.1 High-Pass Filter (HPF)

Excessive DC in audio content can damage loudspeakers, therefore the amplifier employs a DC detect circuit that shutdowns the power stage and issue a latching fault if this condition occurs. A high-pass filter is provided in the TAS5720L/M device to remove DC from incoming audio data to prevent this from occurring. 表 3 shows the high-pass, -3 dB corner frequencies for each sample rate. The filter can be bypassed by writing a 1 into bit 7 of register 0x02.

表 3. High-Pass Filter -3 dB Corner Frequencies by Sample Rate

| SAMPLE RATE (kHz) | -3dB CORNER FREQUENCY (Hz) |
|-------------------|----------------------------|
| 44.1              | 3.675                      |
| 48.0              | 4.000                      |
| 88.2              | 7.350                      |
| 96.0              | 8.000                      |

#### 7.3.4.2 Amplifier Analog Gain and Digital Volume Control

The gain from TDM SAIF to speaker is controlled by setting the amplifier's analog gain and digital volume control. Amplifier analog gain settings are presented as the output level in dBV (dB relative to 1 Vrms) with a full scale serial audio input (0 dBFS) and the digital volume control set to 0 dB. These levels might not be achievable because of analog clipping in the amplifier, therefore they should be used to convey gain only.

表 4 outlines each gain setting expressed in dBV and  $V_{PK}$ .

表 4. Amplifier Gain Settings

| ANALOG_GAIN {1:0} SETTING | FULL SCALE OUTPUT |            |
|---------------------------|-------------------|------------|
|                           | dBV               | $V_{PEAK}$ |
| 00                        | 19.2              | 12.9       |
| 01                        | 20.7              | 15.3       |
| 10                        | 23.5              | 21.2       |
| 11                        | 26.3              | 29.2       |

公式 1 calculates the amplifiers output voltage.

$$V_{amp} = Input + A_{dvc} + A_{amp} \text{ dBV}$$

where

- $V_{AMP}$  is the amplifier output voltage in dBV
- Input is the digital input amplitude in dB with respect to 0 dBFS
- $A_{DVC}$  is the digital volume control setting, -100 dB to 24dB in 0.5-dB steps
- $A_{AMP}$  is the amplifier analog gain setting (19.2, 20.7, 23.5, or 26.3) in dBV

(1)

Clipping in the digital domain occurs if the input level (in dB relative to 0 dBFS) plus the digital volume control setting (in dB) are greater than 0 dB. The signal path has approximately 0.5 dB of headroom, but TI does not recommend utilizing it.

The digital volume control can be adjusted from –100 dB to 24 dB in 0.5-dB steps. 公式 2 calculates the 8-bit volume control register setting at address 0x04.

$$DVC_{\text{value}} = 0xCF + \frac{A_{\text{dvc}}}{0.5} \quad (2)$$

For example, digital volume settings of 0 dB, 24 dB and –100 dB map to 0xCF, 0xFF and 0x07 respectively. Values below 0x07 are equivalent to mute (the amplifier continues to switch with no audio). When a change in digital volume control occurs, the device ramps the volume to the new setting in 0.5 dB steps after every 8 audio samples to ensure smooth transitions in volume.

The Class-D amplifier uses a closed-loop architecture, therefore the gain does not depend on the supply input ( $V_{\text{PVDD}}$ ). The approximate threshold for the onset of analog clipping is calculated in 公式 3.

$$V_{\text{PK(max,preclip)}} = V_{\text{PVDD}} \left( \frac{R_L}{2 \times R_{\text{DS(on)}} + R_{\text{interconnect}} + R_L} \right) V$$

where

- $V_{\text{PK(max,preclip)}}$  is the maximum peak unclipped output voltage in V
- $V_{\text{PVDD}}$  is the power supply voltage
- $R_L$  is the speaker load in  $\Omega$
- $R_{\text{interconnect}}$  is the additional resistance in the PCB (such as cabling and filters) in  $\Omega$
- $R_{\text{DS(on)}}$  is the power stage total on resistance (FET+bonding+packaging) in  $\Omega$

The effective on-resistance for this device (including FETs, bonding and packaging leads) is approximately 150 m $\Omega$  at room temperature and increases by approximately 1.6 times over 100°C rise in temperature. 表 5 shows approximate maximum unclipped peak output voltages at room temperature (excluding interconnect resistances).

**表 5. Approximate Maximum Unclipped Peak Output Voltage at Room Temperature**

| SUPPLY VOLTAGE<br>$V_{\text{PVDD}}$ (V) | MAXIMUM UNCLIPPED<br>PEAK VOLTAGE<br>$V_{\text{PK}}$ (V) |                  |
|-----------------------------------------|----------------------------------------------------------|------------------|
|                                         | $R_L = 4 \Omega$                                         | $R_L = 8 \Omega$ |
| 12                                      | 11.16                                                    | 11.57            |
| 17                                      | 15.81                                                    | 16.39            |

### 7.3.4.3 Digital Clipper

The digital clipper hard limits the maximum DAC sample value, which provides a simple hardware mechanism to control the largest signal applied to the speaker. Because this block resides in the digital domain, the actual maximum output voltage also depends on the amplifier gain setting and the supply voltage ( $V_{\text{PVDD}}$ ) limited amplifier voltage swing (For example, analog clipping can occur before digital clipping).

The maximum amplifier output voltage (excluding limitation due to swing) is calculated in 公式 4.

$$V_{\text{AMP(max,dc)}} = 20 \times \log_{10} \left( \frac{DC_{\text{level}}}{0xFFFF} \right) + 0.5 + A_{\text{AMP}}$$

where

- $V_{\text{AMP(max,dc)}}$  is the amplifier maximum output voltage in dBV
- $DC_{\text{level}}$  is the digital clipper level
- $A_{\text{AMP}}$  is the amplifier analog gain setting (19.2, 20.7, 23.5, or 26.3) in dBV

Configure the digital clipper by writing the 20-bit  $DC_{\text{level}}$  to registers 0x01, 0x10 and 0x11. Set the  $DC_{\text{level}}$  to 0xFFFF effectively bypasses the digital clipper.

### 7.3.4.4 Class-D Amplifier Settings

The PWM switching rate of the Class-D amplifier is a phase locked multiple of the input audio sample rate. 表 6 lists the PWM switching rate settings as programmed in bit 4 through bit 6 in register 0x06. The double-speed sample rates (for example 88.2kHz, 96kHz) have the same PWM switching frequencies as their equivalent single-speed sample rates.

**表 6. PWM Switching Rates**

| PWM_RATE[2:0] | SINGLE-SPEED<br>PWM RATE ( $\times f_{LRCLK}$ ) | DOUBLE-SPEED<br>PWM RATE $\times f_{LRCLK}$ | 44.1 kHz, 88.2 kHz<br>$f_{PWM}(kHz)$ | 48 kHz, 96 kHz<br>$f_{PWM}(kHz)$ |
|---------------|-------------------------------------------------|---------------------------------------------|--------------------------------------|----------------------------------|
| 000           | 6                                               | 3                                           | 264.6                                | 288                              |
| 001           | 8                                               | 4                                           | 352.8                                | 384                              |
| 010           | 10                                              | 5                                           | 441                                  | 480                              |
| 011           | 12                                              | 6                                           | 529.2                                | 576                              |
| 100           | 14                                              | 7                                           | 617.4                                | 672                              |
| 101           | 16                                              | 8                                           | 705.6                                | 768                              |
| 110           | 20                                              | 10                                          | 882                                  | 960                              |
| 111           | 24                                              | 12                                          | 1058.4                               | 1152                             |

The Class-D power stage Over Current detector issues a latching fault if the load current exceeds the safe limit for the device. The threshold can be proportionately adjusted if desired by programming bits 4-5 of register 0x08. 表 7 shows the relative setting for each Over Current setting.

**表 7. Over Current Threshold Settings**

| OC_THRESH<br>[1:0] | OVERCURRENT<br>THRESHOLD (%) |
|--------------------|------------------------------|
| 00                 | 100                          |
| 01                 | 75                           |
| 10                 | 50                           |
| 11                 | 25                           |

## 7.4 Device Functional Modes

This section describes the modes of operation for the TAS5720L/M device.

**表 8. Typical Current Consumption<sup>(1)</sup>**

| INPUT VOLTAGE<br>$V_{PVDD}$ (V) | MODE          | PWM FREQUENCY<br>$f_{PWM}$ (kHz) | $I_{PVDD}+I_{AVDD}$<br>(mA) | INPUT CURRENT<br>$I_{DVDD}$ (mA) |
|---------------------------------|---------------|----------------------------------|-----------------------------|----------------------------------|
| 7.2                             | Idle and Mute | 384                              | 14.5                        | 4.1                              |
|                                 |               | 768                              | 18.4                        |                                  |
|                                 | Sleep         | —                                | 9.0                         | 1.32                             |
|                                 | Shutdown      | —                                | 0.039                       | 0.077                            |
| 12                              | Idle and Mute | 384                              | 17.4                        | 4.1                              |
|                                 |               | 768                              | 21.3                        |                                  |
|                                 | Sleep         | —                                | 9.0                         | 1.32                             |
|                                 | Shutdown      | —                                | 0.045                       | 0.077                            |
| 15                              | Idle and Mute | 384                              | 19.4                        | 4.1                              |
|                                 |               | 768                              | 22.9                        |                                  |
|                                 | Sleep         | —                                | 9.1                         | 1.32                             |
|                                 | Shutdown      | —                                | 0.049                       | 0.077                            |
| 19                              | Idle and Mute | 384                              | 22.4                        | 4.1                              |
|                                 |               | 768                              | 24.8                        |                                  |
|                                 | Sleep         | —                                | 9.3                         | 1.32                             |
|                                 | Shutdown      | —                                | 0.054                       | 0.077                            |
| 24                              | Idle and Mute | 384                              | 26.2                        | 4.1                              |
|                                 |               | 768                              | 26.9                        |                                  |
|                                 | Sleep         | —                                | 9.4                         | 1.32                             |
|                                 | Shutdown      | —                                | 0.061                       | 0.077                            |

(1)  $T_A = 25^\circ\text{C}$ , PVDD pin tied to AVDD pin,  $V_{DVDD} = 3.3\text{ V}$ ,  $R_{LOAD} = 4\Omega$ ,  $f_{IN} = \text{Idle}$ ,  $f_S = 48\text{ kHz}$ , Gain = 20.7 dBV

### 7.4.1 Shutdown Mode (SDZ)

The device enters shutdown mode if either the SDZ pin is asserted low or the I<sup>2</sup>C SDZ register bit is set low (bit 0, reg 0x01). In shutdown mode, the device consumes the minimum quiescent current with most analog and digital blocks powered down. The Class-D amplifier power stage powers down and the output pins are in a Hi-Z state. I<sup>2</sup>C communication remains possible in shutdown mode and register bits states are retained.

If a latching fault condition has occurred (over temperature, Over Current or DC detect), the SDZ pin or I<sup>2</sup>C bit must toggle low before the fault register can be cleared. For more information on faults and recovery, see the [Faults and Status](#) section.

When the device exits shutdown mode (by releasing both the SDZ pin high and setting the I<sup>2</sup>C SDZ register bit high), the device powers up the internal analog and digital blocks required for operation. If the I<sup>2</sup>C SLEEP bit is set low (bit 1, reg 0x01), the device powers up the Class-D amplifier and begins the switching of the power stage. If the I<sup>2</sup>C MUTE bit is set low (bit 4, reg 0x03), the device ramps up the volume to the current setting and begins playing audio.

If shutdown mode is asserted while audio is playing, the device ramps down the volume on the audio, stops the Class-D switching, puts the Class-D power stage output pins in a Hi-Z state and powers down the analog and digital blocks.

### 7.4.2 Sleep Mode

Sleep mode is similar to shutdown mode, except analog and digital blocks required to begin playing audio quickly are left powered up. Sleep mode operates as a *hard mute* where the Class-D amplifier stops switching, but the device does not power down completely. Entering sleep mode does not clear latching faults.

### 7.4.3 Active Mode

If shutdown mode and sleep mode are not asserted, the device is in active mode. During active mode, audio playback is enabled.

### 7.4.4 Mute Mode

When the I<sup>2</sup>C\_MUTE bit is set high (bit 4, reg 0x03) and the device is in active mode, the volume is ramped down and the Class-D amplifier continues to operate with an idle audio input.

### 7.4.5 Faults and Status

During the power-up sequence, the power-on-reset circuit (POR) monitoring the DVDD pin domain releases all registers from reset (including the I<sup>2</sup>C registers) once DVDD is valid. The device does not exit shutdown mode until the PVDD pin has a valid voltage between the undervoltage lockout (UVLO) and overvoltage lockout (OVLO) thresholds. If DVDD drops below the POR threshold the device transitions into shutdown mode with all registers held in reset. If UVLO or OVLO thresholds are violated by the PVDD pin thresholds, the device transitions into shutdown mode, but registers are not be forced into reset. Both of the conditions are non-latching and the device operates normally once supply voltages are valid again. The device can be reset only by reducing DVDD below the POR threshold.

The device transitions into sleep mode if it detects any faults with the SAIF clocks such as

- Invalid MCLK to LRCLK and BCLK to LRCLK ratios
- Invalid MCLK and LRCLK switching rates
- Halting of MCLK, BCLK or LRCLK switching

Upon detection of a SAIF clock error, the device transitions into sleep mode as quickly as possible to limit the possibility of audio artifacts. Once all SAIF clock errors are resolved, the device will volume ramp back to the previous playback state. During a SAIF clock error, the FAULTZ pin will be asserted low and the CLKE bit will be asserted high (register 0x08, bit 3).

While operating in shutdown mode, the SAIF clock error detect circuitry powers down and the CLKE bit reads high. This reading is not an indication of a SAIF clock error. If the device has not entered active mode after a power-up sequence or after transitioning out of shutdown mode, the FAULTZ pin pulses low for only approximately 10  $\mu$ s every 350  $\mu$ s. This action prevents a possible locking condition if the FAULTZ is connected to the SDZ pin to accomplish automatic recovery. Once the device has entered active mode one time (after power up or deassertion of shutdown mode), the SAIF clock errors pull the FAULTZ pin low continuously until the fault has cleared.


The device also monitors die temperature, power stage load current and amplifier output DC content and issues latching faults if any of the conditions occur. A die temperature of approximately 150°C causes the device to enter sleep mode and issue an Over-temperature error (OTE) readable via I<sup>2</sup>C (bit 0, reg 0x08).

Sustained excessive DC content at the output of the Class-D amplifier can damage loudspeakers via voice coil heating. The amplifier has an internal circuit to detect significant DC content that forces the device into sleep mode. The device issues a DC detect error (DCE) readable via I<sup>2</sup>C (bit 1, reg 0x08).

If the Class-D amplifier load current exceeds the threshold set by the OC\_THRESH register bits (bits 5-4, reg 0x08), the device enters sleep mode and issues an Over Current Error (OCE) that is readable via I<sup>2</sup>C (bit 2, reg 0x08).

During OTE, DCE and OCE, the FAULTZ pin asserts low until the latched fault is cleared. FAULTZ is an open drain pin and requires a pull-up resistor to the DVDD pin.

Latched faults can be cleared only by toggling the SDZ pin or SDZ I<sup>2</sup>C bit (bit 0, reg 0x01). This toggle does not clear I<sup>2</sup>C registers (except the fault status of OTE, OCE and DCE). If the device is intended to attempt automatic recovery after latching faults, implement a circuit like the one shown in [图 50](#). The device waits approximately 650 ms after a DCE fault has cleared and 1.3 s after an OTE or OCE fault has cleared before releasing FAULTZ high and allowing the device to enter active mode.

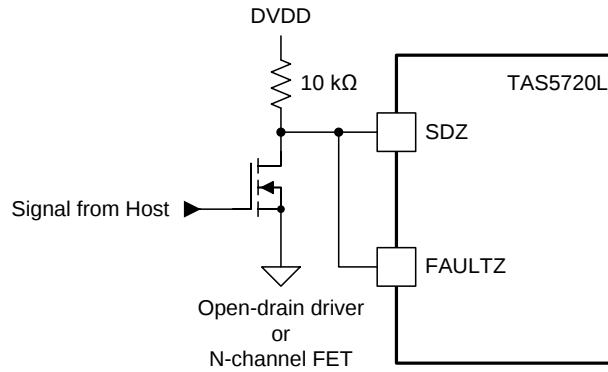

**图 50. Auto Recovery Circuit**

## 7.5 Register Maps

When writing to registers with reserved bits, maintain the values shown in 表 9 to ensure proper device operation. Default register values are loaded during the power-up sequence or any time the DVDD voltage falls below the power-on-reset (POR) threshold and then returns to valid operation.

**TAS5720L, TAS5720M**

ZHCSET5B – MAY 2015 – REVISED FEBRUARY 2016

[www.ti.com.cn](http://www.ti.com.cn)
**表 9. I<sup>2</sup>C Register Map Summary**

| ADDR<br>(Dec) | ADDR<br>(Hex) | REGISTER<br>NAME              | REGISTER BITS              |             |           |      |             |                 |       |     | DEFAULT<br>(Hex) |
|---------------|---------------|-------------------------------|----------------------------|-------------|-----------|------|-------------|-----------------|-------|-----|------------------|
|               |               |                               | B7                         | B6          | B5        | B4   | B3          | B2              | B1    | B0  |                  |
| 0             | 0x00          | Device ID                     | DEVICE_ID                  |             |           |      |             |                 |       |     | 0x01             |
|               |               |                               | 0                          | 0           | 0         | 0    | 0           | 0               | 0     | 1   |                  |
| 1             | 0x01          | Power Control                 | DIGITAL_CLIP_LEVEL [19:14] |             |           |      |             |                 | SLEEP | SDZ | 0xFD             |
|               |               |                               | 1                          | 1           | 1         | 1    | 1           | 1               | 0     | 1   |                  |
| 2             | 0x02          | Digital Control 1             | HPF_BYPASS                 | TDM_CFG_SRC | RSV       |      | SSZ/DS      | SAIF_FORMAT     |       |     | 0x04             |
|               |               |                               | 0                          | 0           | 0         | 0    | 0           | 1               | 0     | 0   |                  |
| 3             | 0x03          | Digital Control 2             | RSV                        |             |           | MUTE | RSV         | TDM_SLOT_SELECT |       |     | 0x80             |
|               |               |                               | 1                          | 0           | 0         | 0    | 0           | 0               | 0     | 0   |                  |
| 4             | 0x04          | Volume Control                | VOLUME_CONTROL             |             |           |      |             |                 |       |     | 0xCF             |
|               |               |                               | 1                          | 1           | 0         | 0    | 1           | 1               | 1     | 1   |                  |
| 6             | 0x06          | Analog Control                | RSV                        | PWM_RATE    |           |      | ANALOG_GAIN |                 | RSV   |     | 0x55             |
|               |               |                               | 0                          | 1           | 0         | 1    | 0           | 1               | 0     | 1   |                  |
| 8             | 0x08          | Fault Config and Error Status | RSV                        |             | OC_THRESH |      | CLKE        | OCE             | DCE   | OTE | 0x00             |
|               |               |                               | 0                          | 0           | 0         | 0    | 0           | 0               | 0     | 0   |                  |
| 16            | 0x10          | Digital Clipper 2             | DIGITAL_CLIP_LEVEL[13:6]   |             |           |      |             |                 |       |     | 0xFF             |
|               |               |                               | 1                          | 1           | 1         | 1    | 1           | 1               | 1     | 1   |                  |
| 17            | 0x11          | Digital Clipper 1             | DIGITAL_CLIP_LEVEL[5:0]    |             |           |      |             |                 | RSV   |     | 0xFC             |
|               |               |                               | 1                          | 1           | 1         | 1    | 1           | 1               | 0     | 0   |                  |

## 7.5.1 Device Identification

**图 51. Device Identification, Address: 0x000**

| 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------|---|---|---|---|---|---|---|
| DEVICE_ID |   |   |   |   |   |   |   |
| R         |   |   |   |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 10. Device Identification, Address: 0x000**

| Bit | Field          | Type | Reset | Description                                      |
|-----|----------------|------|-------|--------------------------------------------------|
| 7   | DEVICE_ID[7:0] | R    | 0     | This register returns a value of 0x01 when read. |
| 6   |                |      | 0     |                                                  |
| 5   |                |      | 0     |                                                  |
| 4   |                |      | 0     |                                                  |
| 3   |                |      | 0     |                                                  |
| 2   |                |      | 0     |                                                  |
| 1   |                |      | 0     |                                                  |
| 0   |                |      | 1     |                                                  |

## 7.5.2 Power Control Register

**表 11. Power Control Register, Address: 0x001**

| 7                  | 6 | 5 | 4 | 3 | 2 | 1     | 0   |
|--------------------|---|---|---|---|---|-------|-----|
| DIGITAL_CLIP_LEVEL |   |   |   |   |   | SLEEP | SDZ |
| R/W                |   |   |   |   |   | R/W   | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 12. Power Control Register, Address: 0x001**

| Bit | Field                     | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | DIGITAL_CLIP_LEVEL[19:14] | R/W  | 1     | This register holds the top 6-bits of the 20-bit Digital Clipper level. The Digital Clipper limits the magnitude of the sample applied to the DAC. See the <a href="#">Digital Clipper</a> section for more information.                                                                                                                                                                                                        |
| 6   |                           |      | 1     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 5   |                           |      | 1     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 4   |                           |      | 1     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 3   |                           |      | 1     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 2   |                           |      | 1     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 1   | SLEEP                     | R/W  | 0     | When the device enters SLEEP mode, volume ramps down and the Class-D output stage powers down to a Hi-Z state. The rest of the blocks will be kept in a state such that audio playback can be restarted as quickly as possible. This mode has lower dissipation than MUTE, but higher than SHUTDOWN. For more information see the <a href="#">Device Functional Modes</a> section.<br>0: Exit Sleep (default)<br>1: Enter Sleep |
| 0   | SDZ                       | R/W  | 1     | The device enters SHUTDOWN mode if either this bit is set to a 0 or the SDZ pin is pulled low externally. In SHUTDOWN, the device holds the lowest dissipation state. I <sup>2</sup> C communication remains functional and all registers are retained. For more information see the <a href="#">Device Functional Modes</a> section.<br>0: Enter SHUTDOWN<br>1: Exit SHUTDOWN (default)                                        |

### 7.5.3 Digital Control Register 1

**表 13. Digital Control Register 1, Address: 0x002**

| 7          | 6           | 5   | 4      | 3           | 2   | 1   | 0   |
|------------|-------------|-----|--------|-------------|-----|-----|-----|
| HPF_BYPASS | TDM_CFG_SRC | RSV | SSZ/DS | SAIF_FORMAT |     |     |     |
| R/W        | R/W         | R/W | R/W    | R/W         | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 14. Digital Control Register 1, Address: 0x002**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                         |
|-----|------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | HPF_BYPASS       | R/W  | 0     | The high-pass filter removes any DC component in the audio content that could trip the DC detect protection feature in the amplifier, which is a latching fault. Setting this bit bypasses the high-pass filter. See the <a href="#">High-Pass Filter (HPF)</a> section for more information.<br>0: Enable high-pass filter (default)<br>1: Bypass high-pass filter |
| 6   | TDM_CFG_SRC      | R/W  | 0     | This bit determines how the device selects which audio channel direct to the playback stream. See the <a href="#">Serial Audio Interface (SAIF)</a> section for more information.<br>0: Set TDM Channel to I <sup>2</sup> C Device ID (default).<br>1: Set TDM Channel to TDM_SLOT_SELECT in register 0x03.                                                         |
| 5   | RSV[1:0]         | R/W  | 0     | These bits are reserved and should be set to 00 when writing to this register.                                                                                                                                                                                                                                                                                      |
| 4   |                  | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                     |
| 3   | SSZ/DS           | R/W  | 0     | This bit sets the sample rate to single speed or double speed operation. See the <a href="#">Serial Audio Interface (SAIF)</a> section for more information.<br>0: Single speed operation (44.1 kHz/48 kHz) - default.<br>1: Double speed operation (88.2 kHz/96 kHz)                                                                                               |
| 2   | SAIF_FORMAT[2:0] | R/W  | 1     | These bits set the Serial Audio Interface format. See the <a href="#">Serial Audio Interface (SAIF)</a> section for more information.<br>000: Right justified, 24-bit<br>001: Right justified, 20-bit                                                                                                                                                               |
| 1   |                  | R/W  | 0     | 010: Right justified, 18-bit<br>011: Right justified, 16-bit<br>100: I <sup>2</sup> S (default)                                                                                                                                                                                                                                                                     |
| 0   |                  | R/W  | 0     | 101: Left Justified, 16-24 bits<br>110: Reserved. Do not select this value.<br>111: Reserved. Do not select this value.                                                                                                                                                                                                                                             |

## 7.5.4 Digital Control Register 2

**表 15. Digital Control Register 2, Address: 0x003**

| 7   | 6 | 5 | 4    | 3   | 2               | 1 | 0 |
|-----|---|---|------|-----|-----------------|---|---|
| RSV |   |   | MUTE | RSV | TDM_SLOT_SELECT |   |   |
| R/W |   |   | R/W  |     | R/W             |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 16. Digital Control Register 2, Address: 0x003**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                            |
|-----|----------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RSV[2:0]             | R/W  | 1     | These bits are reserved and should be set to 100 when this register is written to                                                                                                                                      |
| 6   |                      | R/W  | 0     |                                                                                                                                                                                                                        |
| 5   |                      | R/W  | 0     |                                                                                                                                                                                                                        |
| 4   | MUTE                 | R/W  | 0     | When set the device ramps down volume and play idle audio. See the <a href="#">Amplifier Analog Gain and Digital Volume Control</a> section for more information.<br>0: Exit mute mode (default)<br>1: Enter mute mode |
| 3   | RSV                  | R/W  | 0     | This bit is reserved and should be set to 0 when writing to this register.                                                                                                                                             |
| 2   | TDM_SLOT_SELECT[2:0] | R/W  | 0     | When the TDM_CFG_SRC bit is set to 1 in register 0x02, these bits select which TDM channel is directed to audio playback. See the <a href="#">Serial Audio Interface (SAIF)</a> section for more information           |
| 1   |                      | R/W  | 0     |                                                                                                                                                                                                                        |
| 0   |                      | R/W  | 0     |                                                                                                                                                                                                                        |

## 7.5.5 Volume Control Register

**表 17. Volume Control Register, Address: 0x004**

| 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------------|---|---|---|---|---|---|---|
| VOLUME_CONTROL |   |   |   |   |   |   |   |
| R/W            |   |   |   |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 18. Volume Control Register, Address: 0x004**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                               |
|-----|---------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | VOLUME_CONTROL[7:0] | R/W  | 1     | This register sets the Digital Volume Control, which ranges from -100 dB to +24 dB in 0.5 dB steps. Register settings of less than 0x07 are equivalent to setting the Mute bit in register 0x03. See the <a href="#">Amplifier Analog Gain and Digital Volume Control</a> section for more information.<br>0xFF: +24.0 dB |
| 6   |                     | R/W  | 1     | 0xFE: +23.5 dB                                                                                                                                                                                                                                                                                                            |
| 5   |                     | R/W  | 0     | ...                                                                                                                                                                                                                                                                                                                       |
| 4   |                     | R/W  | 0     | 0xCF: 0 dB (default)                                                                                                                                                                                                                                                                                                      |
| 3   |                     | R/W  | 1     | ...                                                                                                                                                                                                                                                                                                                       |
| 2   |                     | R/W  | 1     | 0x08: -99.5 dB                                                                                                                                                                                                                                                                                                            |
| 1   |                     | R/W  | 1     | 0x07: -100 dB                                                                                                                                                                                                                                                                                                             |
| 0   |                     | R/W  | 1     | < 0x07: MUTE                                                                                                                                                                                                                                                                                                              |

## 7.5.6 Analog Control Register

**表 19. Analog Control Register, Address: 0x006**

| 7   | 6        | 5 | 4 | 3           | 2 | 1   | 0 |
|-----|----------|---|---|-------------|---|-----|---|
| RSV | PWM_RATE |   |   | ANALOG_GAIN |   | RSV |   |
| R/W | R/W      |   |   | R/W         |   | R/W |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 20. Analog Control Register, Address: 0x006**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                |
|-----|------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RSV              | R/W  | 0     | This bit is reserved and should be set to a 0 when this register is written to.                                                                                                                                                                                                                                                                                                            |
| 6   | PWM_RATE[2:0]    | R/W  | 1     | These bits set the PWM switching rate, which is a locked ratio of LRCLK. For more information see the <a href="#">Class-D Amplifier Settings</a> section.<br>000: 6 × LRCLK (single speed), 3 × LRCLK (double speed)<br>001: 8 × LRCLK (single speed), 4 × LRCLK (double speed)                                                                                                            |
| 5   |                  | R/W  | 0     | 010: 10 × LRCLK (single speed), 5 × LRCLK (double speed)<br>011: 12 × LRCLK (single speed), 6 × LRCLK (double speed)<br>100: 14 × LRCLK (single speed), 7 × LRCLK (double speed)                                                                                                                                                                                                           |
| 4   |                  | R/W  | 1     | 101: 16 × LRCLK (single speed), 8 × LRCLK (double speed) - default<br>110: 20 × LRCLK (single speed), 10 × LRCLK (double speed)<br>111: 24 × LRCLK (single speed), 12 × LRCLK (double speed)                                                                                                                                                                                               |
| 3   | ANALOG_GAIN[1:0] | R/W  | 0     | Sets the analog gain of the Class-D amplifier. The values shown indicate the output level with digital volume control set to 0 dB and a full scale digital input (0 dBFS). This level might not be achievable because of analog clipping. See the <a href="#">Amplifier Analog Gain and Digital Volume Control</a> section for more information.<br>00: 19.2 dBV<br>01: 20.7 dBV (default) |
| 2   |                  | R/W  | 1     | 10: 23.5 dBV<br>11: 26.3 dBV                                                                                                                                                                                                                                                                                                                                                               |
| 1   | RSV[1:0]         | R/W  | 0     | These bits are reserved and should be set to 01 when writing to this register                                                                                                                                                                                                                                                                                                              |
| 0   |                  | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                                            |

## 7.5.7 Fault Configuration and Error Status Register

**表 21. Fault Configuration and Error Status Register, Address: 0x008**

| 7   |  | 6 |  | 5         |  | 4 |  | 3    |  | 2   |  | 1   |  | 0   |  |
|-----|--|---|--|-----------|--|---|--|------|--|-----|--|-----|--|-----|--|
| RSV |  |   |  | OC_THRESH |  |   |  | CLKE |  | OCE |  | DCE |  | OTE |  |
| R/W |  |   |  | R/W       |  |   |  | R    |  | R   |  | R   |  | R   |  |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 22. Fault Configuration and Error Status Register, Address: 0x008**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                       |
|-----|----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RSV[1:0]       | R/W  | 0     | This bit is reserved and should be set to a 00 when this register is written to.                                                                                                                                                                  |
| 6   |                | R/W  | 0     |                                                                                                                                                                                                                                                   |
| 5   | OC_THRESH[1:0] | R/W  | 0     | This register sets the Over Current detector threshold. For more information see the <a href="#">Class-D Amplifier Settings</a> section.<br>00: 100% of Over Current limit (default)<br>01: 75% of Over Current limit                             |
| 4   |                | R/W  | 1     |                                                                                                                                                                                                                                                   |
| 3   | CLKE           | R    | 0     | This bit indicates the status of the SAIF clock error detector. This is a self clearing value.<br>0: No SAIF clock errors.<br>1: SAIF clock errors are present.                                                                                   |
| 2   | OCE            | R    | 0     | This bit indicates the status of the over current error detector. This is a latching value<br>0: The Class-D output stage has not experienced an over current event.<br>1: The Class-D output stage has experienced an over current event.        |
| 1   | DCE            | R    | 0     | This bit indicates the status of the DC detector. This is a latching value.<br>0: The Class-D output stage has not experienced a DC detect error.<br>1: The Class-D output stage has experienced a DC detect error.                               |
| 0   | OTE            | R    | 0     | This bit indicates the status of the over temperature detector. This is a latching value.<br>0: The Class-D output stage has not experienced an over temperature error.<br>1: The Class-D output stage has experienced an over temperature error. |

## 7.5.8 Digital Clipper 2

**表 23. Digital Clipper 2, Address: 0x010**

|                    |   |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|---|
| 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| DIGITAL_CLIP_LEVEL |   |   |   |   |   |   |   |
| R/W                |   |   |   |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 24. Digital Clipper 2, Address: 0x010**

| Bit | Field                    | Type | Reset | Description                                                                                                                                                                                                                     |
|-----|--------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | DIGITAL_CLIP_LEVEL[13:6] | R/W  | 1     | This register holds the bits 13 through 6 of the 20-bit Digital Clipper level. The Digital Clipper limits the magnitude of the sample applied to the DAC. See the <a href="#">Digital Clipper</a> section for more information. |
| 6   |                          | R/W  | 1     |                                                                                                                                                                                                                                 |
| 5   |                          | R/W  | 1     |                                                                                                                                                                                                                                 |
| 4   |                          | R/W  | 1     |                                                                                                                                                                                                                                 |
| 3   |                          | R/W  | 1     |                                                                                                                                                                                                                                 |
| 2   |                          | R/W  | 1     |                                                                                                                                                                                                                                 |
| 1   |                          | R/W  | 1     |                                                                                                                                                                                                                                 |
| 0   |                          | R/W  | 1     |                                                                                                                                                                                                                                 |

## 7.5.9 Digital Clipper 1

**表 25. Digital Clipper 1, Address: 0x011**

|                    |   |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|---|
| 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| DIGITAL_CLIP_LEVEL |   |   |   |   |   |   |   |
| R/W                |   |   |   |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 26. Digital Clipper 1, Address: 0x011**

| Bit | Field                   | Type | Reset | Description                                                                                                                                                                                                                    |
|-----|-------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | DIGITAL_CLIP_LEVEL[5:0] | R/W  | 1     | This register holds the bits 5 through 0 of the 20-bit Digital Clipper level. The Digital Clipper limits the magnitude of the sample applied to the DAC. See the <a href="#">Digital Clipper</a> section for more information. |
| 6   |                         | R/W  | 1     |                                                                                                                                                                                                                                |
| 5   |                         | R/W  | 1     |                                                                                                                                                                                                                                |
| 4   |                         | R/W  | 1     |                                                                                                                                                                                                                                |
| 3   |                         | R/W  | 1     |                                                                                                                                                                                                                                |
| 2   |                         | R/W  | 1     |                                                                                                                                                                                                                                |
| 1   | RSV[1:0]                | R/W  | 0     | These bits are reserved and should be set to 00 when writing to this register.                                                                                                                                                 |
| 0   |                         | R/W  | 0     |                                                                                                                                                                                                                                |

## 8 Applications and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

This section describes a filter-free, TDM application.

### 8.2 Typical Application

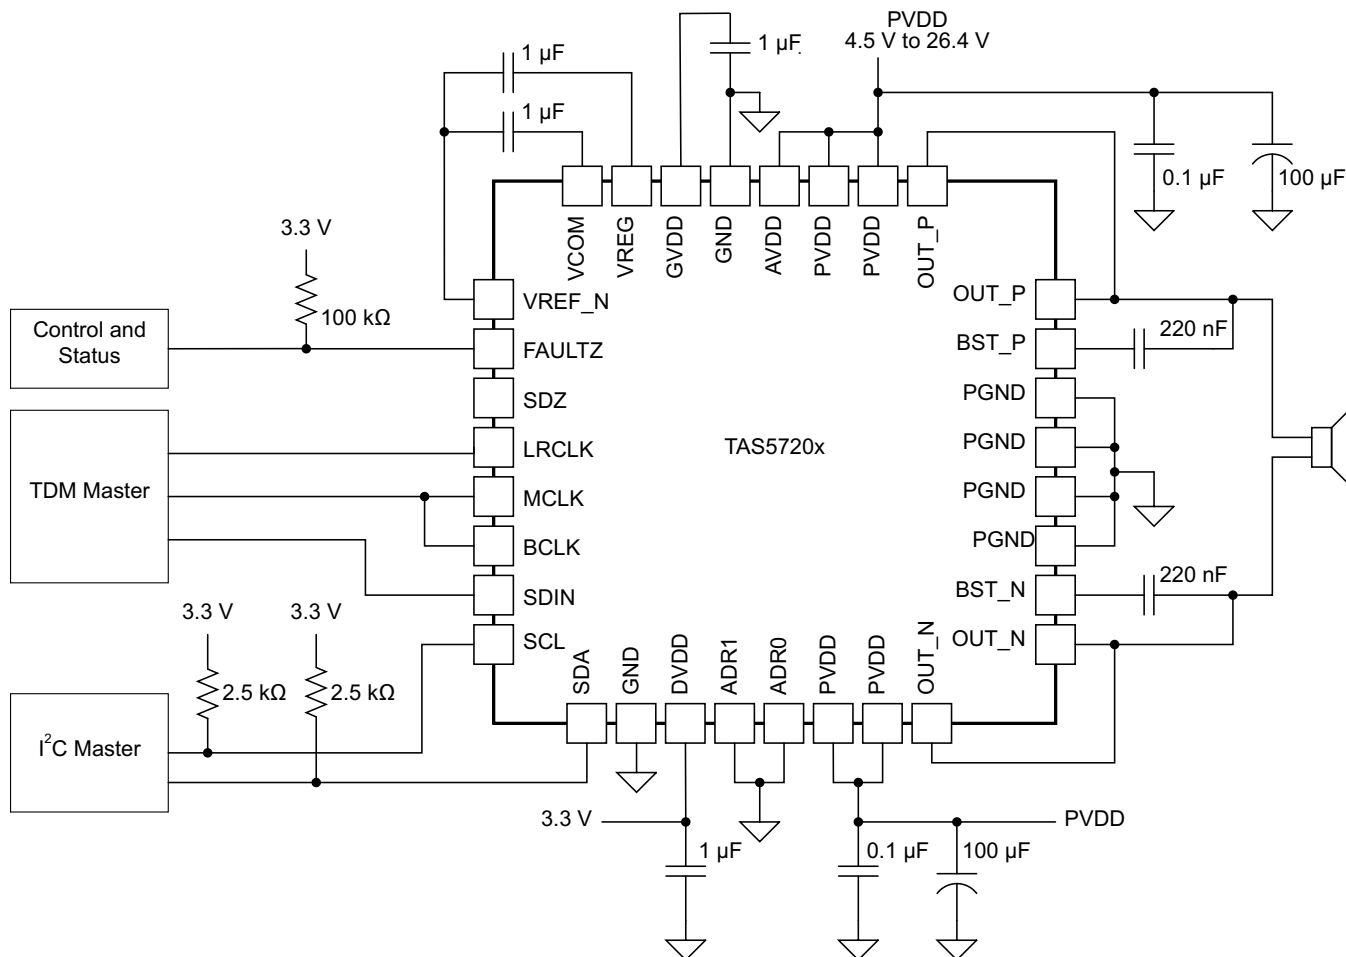


图 52. Filter Free 3-Wire TDM Application Circuit (I2C\_DEV\_ID = 0x6C)

#### 8.2.1 Design Requirements

- Input voltage range PVDD and AVDD: 4.5 V to 26.4 V
- Input voltage range DVDD: 3.3 V to 3.6 V
- Input sample rate: 44.1 kHz to 48 kHz or 88.2 kHz to 96 kHz
- I<sup>2</sup>C clock frequency: up to 400 kHz

## Typical Application (接下页)

### 8.2.2 Design Procedure

#### 8.2.2.1 Overview

The TAS5720L/M is a flexible and easy to use Class D amplifier; therefore the design process is straightforward. Before beginning the design, gather the following information regarding the audio system.

- PVDD rail planned for the design
- Speaker or load impedance
- Audio sample rate
- Maximum output power requirement
- Desired PWM frequency

#### 8.2.2.2 Select the PWM Frequency

Set the PWM frequency by writing to the PWM\_RATE bits (bits 6-4, reg 0x06). The default setting for this register is 101, which is  $16 \times \text{LRCLK}$  for single speed applications and  $8 \times \text{LRCLK}$  for double speed application. This value equates to a default PWM frequency of 768 kHz for a 48 Hz sample rate.

#### 8.2.2.3 Select the Amplifier Gain and Digital Volume Control

To select the amplifier gain setting, the designer must determine the maximum power target and the speaker impedance. Once the parameters have been determined, calculate the required output voltage swing which delivers the maximum output power.

Choose the lowest analog gain setting that corresponds to produce an output voltage swing greater than the required output swing for maximum power. The analog gain can be set by writing to the ANALOG\_GAIN bits (bits 3-2, reg 0x06). The default gain setting is 20.7 dBV referenced to 0dBFS input.

#### 8.2.2.4 Select Input Capacitance

Select the bulk capacitors at the PVDD inputs for proper voltage margin and adequate capacitance to support the power requirements. The TAS5720L/M has very good PVDD PSRR, so the capacitor is more about limiting the ripple and droop for the rest of system than preserving good audio performance. The amount of bulk decoupling can be reduced as long as the droop and ripple is acceptable. One capacitor should be placed near the PVDD inputs at each side of the device. PVDD capacitors should be a low ESR type because they are being used in a high-speed switching application.

#### 8.2.2.5 Select Decoupling Capacitors



Good quality decoupling capacitors should be added at each of the PVDD inputs to provide good reliability, good audio performance, and to meet regulatory requirements. X5R or better ratings should be used in this application. Consider temperature, ripple current, and voltage overshoots when selecting decoupling capacitors. Also, the decoupling capacitors should be located near the PVDD and GND connections to the device to minimize series inductances.

#### 8.2.2.6 Select Bootstrap Capacitors

Each of the outputs require bootstrap capacitors to provide gate drive for the high-side output FETs. For this design, use 0.22- $\mu\text{F}$ , 25-V capacitors of X5R quality or better.

## Typical Application (接下页)

### 8.2.3 Application Curves

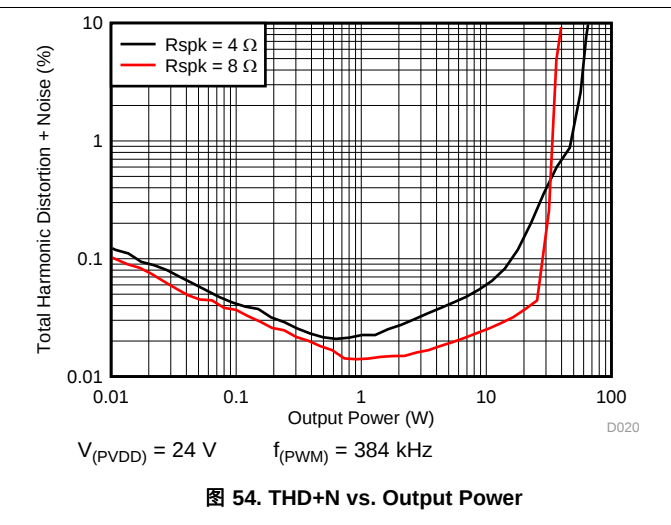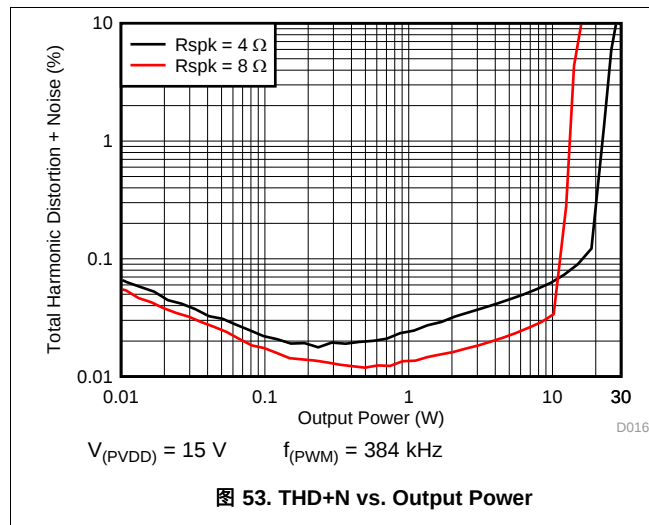

## 9 Power Supply Recommendations

The power supply requirements for the TAS5720L/M device consist of one 3.3-V supply to power the low-voltage analog and digital circuitry and one higher-voltage supply to power the output stage of the speaker amplifier. Several on-chip regulators are included on the TAS5720L/M device to generate the voltages necessary for the internal circuitry of the audio path. The voltage regulators which have been integrated are sized only to provide the current necessary to power the internal circuitry. The external pins are provided only as a connection point for off-chip bypass capacitors to filter the supply. Connecting external circuitry to the regulator outputs can result in reduced performance and damage to the device.

The TAS5720L/M requires two power supplies. A 3.3-V supply, called DVDD, is required to power the digital section of the chip. A higher-voltage supply, between 4.5 V and 26.4 V, supplies the analog circuitry (AVDD) and the power stage (PVDD). The AVDD supply feeds several LDOs including GVDD, VREG, and VCOM. The LDO outputs are connected to external pins for filtering purposes, but should not be connected to external circuits. The LDO outputs have been sized to provide current necessary for internal functions but not for external loading.

## 10 Layout

### 10.1 Layout Guidelines

- Pay special attention to the power stage power supply layout. Each H-bridge has two PVDD input pins so that decoupling capacitors can be placed nearby. Use at least a 0.1-μF capacitor of X5R quality or better for each set of inputs.
- Keep the current circulating loops containing the supply decoupling capacitors, the H-bridges in the device and the connections to the speakers as tight as possible to reduce emissions.
- Use ground planes to provide the lowest impedance for power and signal current between the device and the decoupling capacitors. The area directly under the device should be treated as a central ground area for the device, and all device grounds must be connected directly to that area.
- Use a via pattern to connect the area directly under the device to the ground planes in copper layers below the surface. This connection helps to dissipate heat from the device.
- Avoid interrupting the ground plane with circular traces around the device. Interruption disconnects the copper and interrupt flow of heat and current. Radial copper traces are better to use if necessary.

## TAS5720L, TAS5720M

ZHCSET5B – MAY 2015 – REVISED FEBRUARY 2016

[www.ti.com.cn](http://www.ti.com.cn)

### 10.2 Layout Example

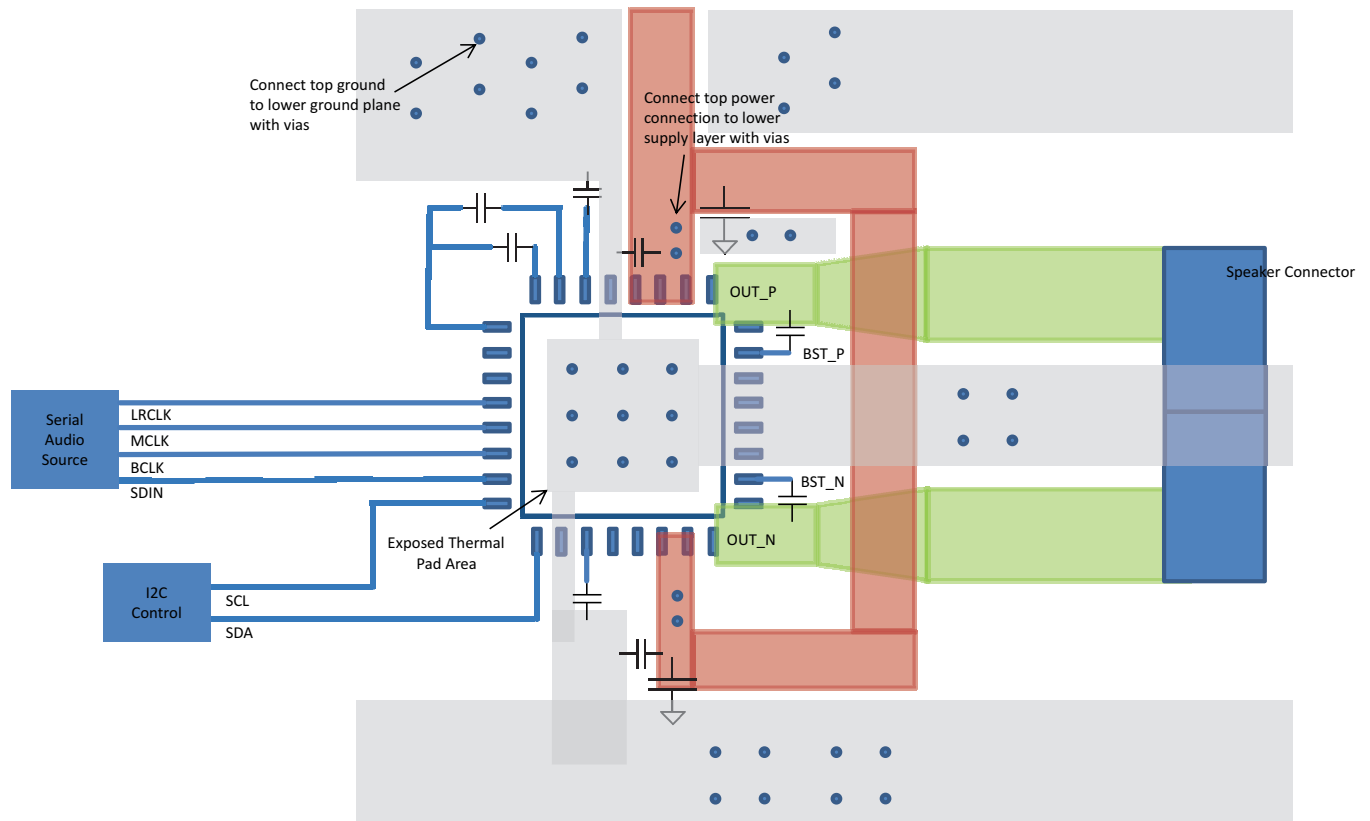


图 55. TAS5720L Layout Example

## 11 器件和文档支持

### 11.1 文档支持

#### 11.1.1 相关链接

下面的表格列出了快速访问链接。范围包括技术文档、支持和社区资源、工具和软件，以及样片或购买的快速访问。

表 27. 相关链接

| 器件       | 产品文件夹                 | 样片与购买                 | 技术文档                  | 工具与软件                 | 支持与社区                 |
|----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| TAS5720L | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| TAS5720M | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |

### 11.2 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 11.3 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 11.4 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 11.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

## 重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

|               | 产品                                                                                         |              | 应用                                                                           |
|---------------|--------------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------|
| 数字音频          | <a href="http://www.ti.com.cn/audio">www.ti.com.cn/audio</a>                               | 通信与电信        | <a href="http://www.ti.com.cn/telecom">www.ti.com.cn/telecom</a>             |
| 放大器和线性器件      | <a href="http://www.ti.com.cn/amplifiers">www.ti.com.cn/amplifiers</a>                     | 计算机及周边       | <a href="http://www.ti.com.cn/computer">www.ti.com.cn/computer</a>           |
| 数据转换器         | <a href="http://www.ti.com.cn/dataconverters">www.ti.com.cn/dataconverters</a>             | 消费电子         | <a href="http://www.ti.com.cn/consumer-apps">www.ti.com.cn/consumer-apps</a> |
| DLP® 产品       | <a href="http://www.dlp.com">www.dlp.com</a>                                               | 能源           | <a href="http://www.ti.com.cn/energy">www.ti.com.cn/energy</a>               |
| DSP - 数字信号处理器 | <a href="http://www.ti.com.cn/dsp">www.ti.com.cn/dsp</a>                                   | 工业应用         | <a href="http://www.ti.com.cn/industrial">www.ti.com.cn/industrial</a>       |
| 时钟和计时器        | <a href="http://www.ti.com.cn/clockandtimers">www.ti.com.cn/clockandtimers</a>             | 医疗电子         | <a href="http://www.ti.com.cn/medical">www.ti.com.cn/medical</a>             |
| 接口            | <a href="http://www.ti.com.cn/interface">www.ti.com.cn/interface</a>                       | 安防应用         | <a href="http://www.ti.com.cn/security">www.ti.com.cn/security</a>           |
| 逻辑            | <a href="http://www.ti.com.cn/logic">www.ti.com.cn/logic</a>                               | 汽车电子         | <a href="http://www.ti.com.cn/automotive">www.ti.com.cn/automotive</a>       |
| 电源管理          | <a href="http://www.ti.com.cn/power">www.ti.com.cn/power</a>                               | 视频和影像        | <a href="http://www.ti.com.cn/video">www.ti.com.cn/video</a>                 |
| 微控制器 (MCU)    | <a href="http://www.ti.com.cn/microcontrollers">www.ti.com.cn/microcontrollers</a>         |              |                                                                              |
| RFID 系统       | <a href="http://www.ti.com.cn/rfidsys">www.ti.com.cn/rfidsys</a>                           |              |                                                                              |
| OMAP应用处理器     | <a href="http://www.ti.com.cn/omap">www.ti.com.cn/omap</a>                                 |              |                                                                              |
| 无线连通性         | <a href="http://www.ti.com.cn/wirelessconnectivity">www.ti.com.cn/wirelessconnectivity</a> | 德州仪器在线技术支持社区 | <a href="http://www.deyisupport.com">www.deyisupport.com</a>                 |

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122  
Copyright © 2016, 德州仪器半导体技术(上海)有限公司

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TAS5720LRSMR     | ACTIVE        | VQFN         | RSM                | 32   | 3000           | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -25 to 85    | TAS<br>5720L            | <a href="#">Samples</a> |
| TAS5720LRSMT     | ACTIVE        | VQFN         | RSM                | 32   | 250            | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -25 to 85    | TAS<br>5720L            | <a href="#">Samples</a> |
| TAS5720MRSMR     | ACTIVE        | VQFN         | RSM                | 32   | 3000           | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -25 to 85    | TAS<br>5720M            | <a href="#">Samples</a> |
| TAS5720MRSMT     | ACTIVE        | VQFN         | RSM                | 32   | 250            | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -25 to 85    | TAS<br>5720M            | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

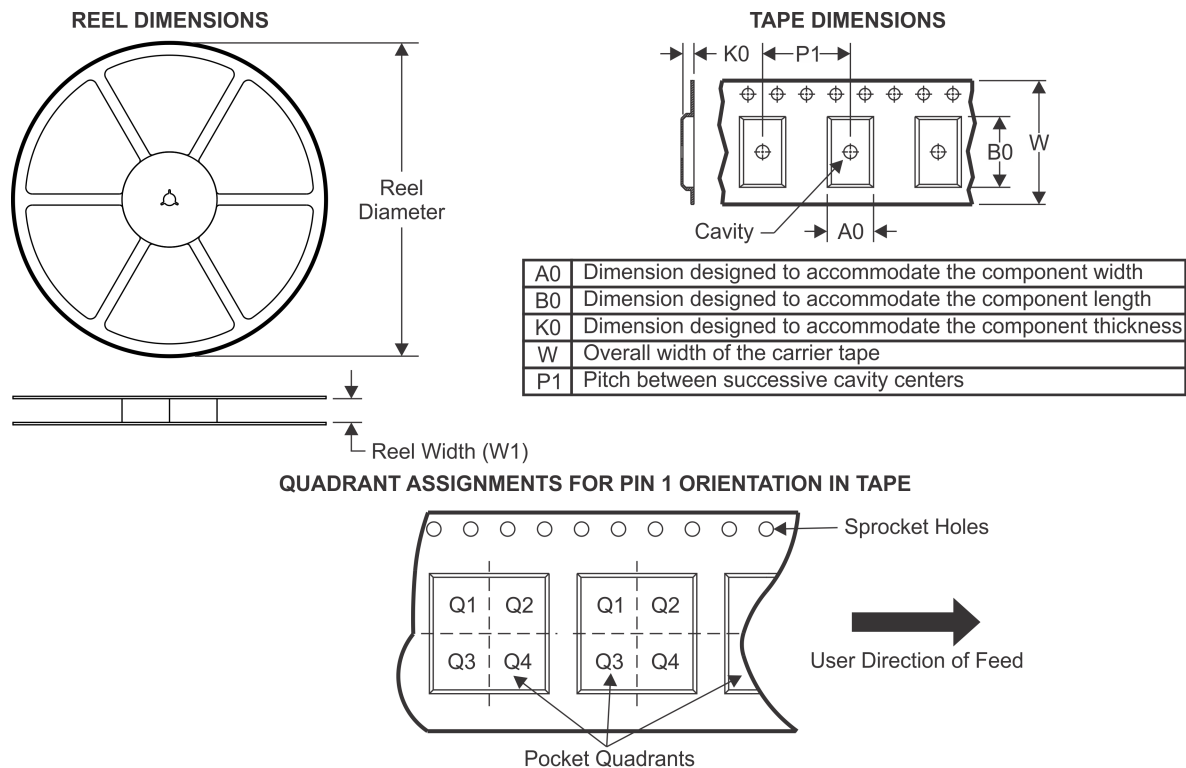**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TAS5720LRSMR | VQFN         | RSM             | 32   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| TAS5720LRSMT | VQFN         | RSM             | 32   | 250  | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| TAS5720MRSMR | VQFN         | RSM             | 32   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| TAS5720MRSMT | VQFN         | RSM             | 32   | 250  | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS

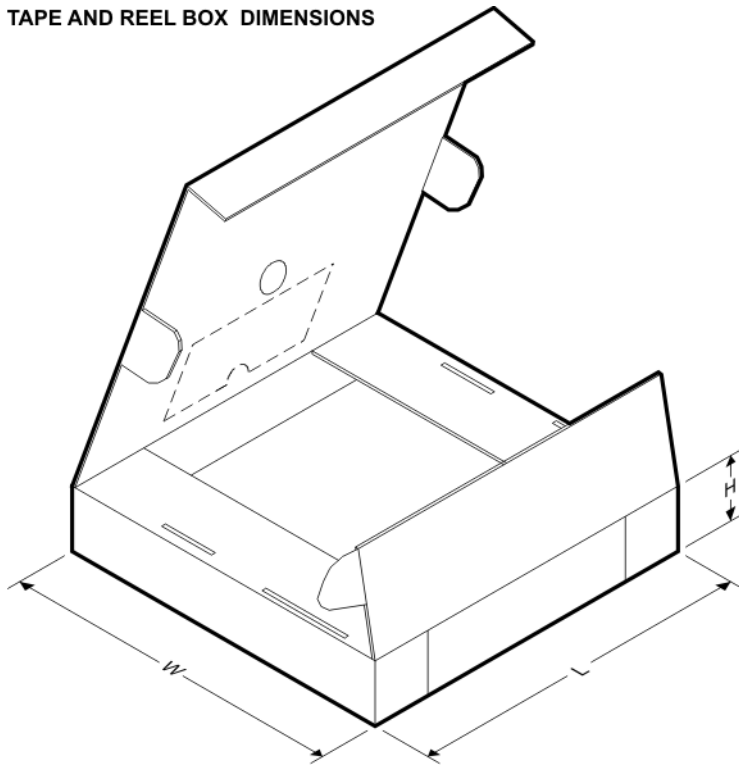

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TAS5720LRSMR | VQFN         | RSM             | 32   | 3000 | 367.0       | 367.0      | 35.0        |
| TAS5720LRSMT | VQFN         | RSM             | 32   | 250  | 210.0       | 185.0      | 35.0        |
| TAS5720MRSMR | VQFN         | RSM             | 32   | 3000 | 367.0       | 367.0      | 35.0        |
| TAS5720MRSMT | VQFN         | RSM             | 32   | 250  | 210.0       | 185.0      | 35.0        |

## GENERIC PACKAGE VIEW


**RSM 32**

**VQFN - 1 mm max height**



4 x 4, 0.4 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

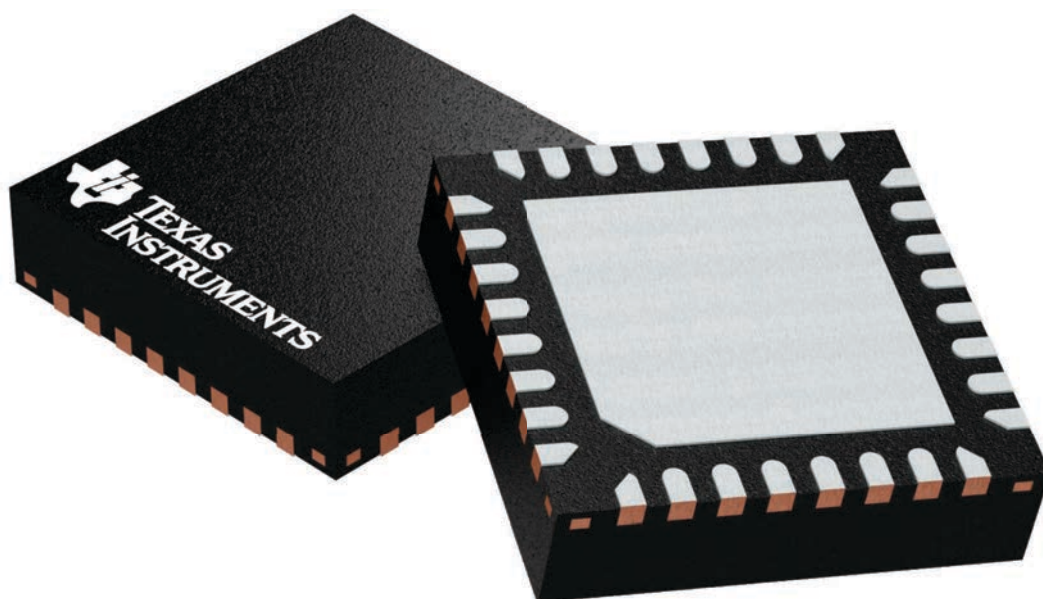

4224982/A

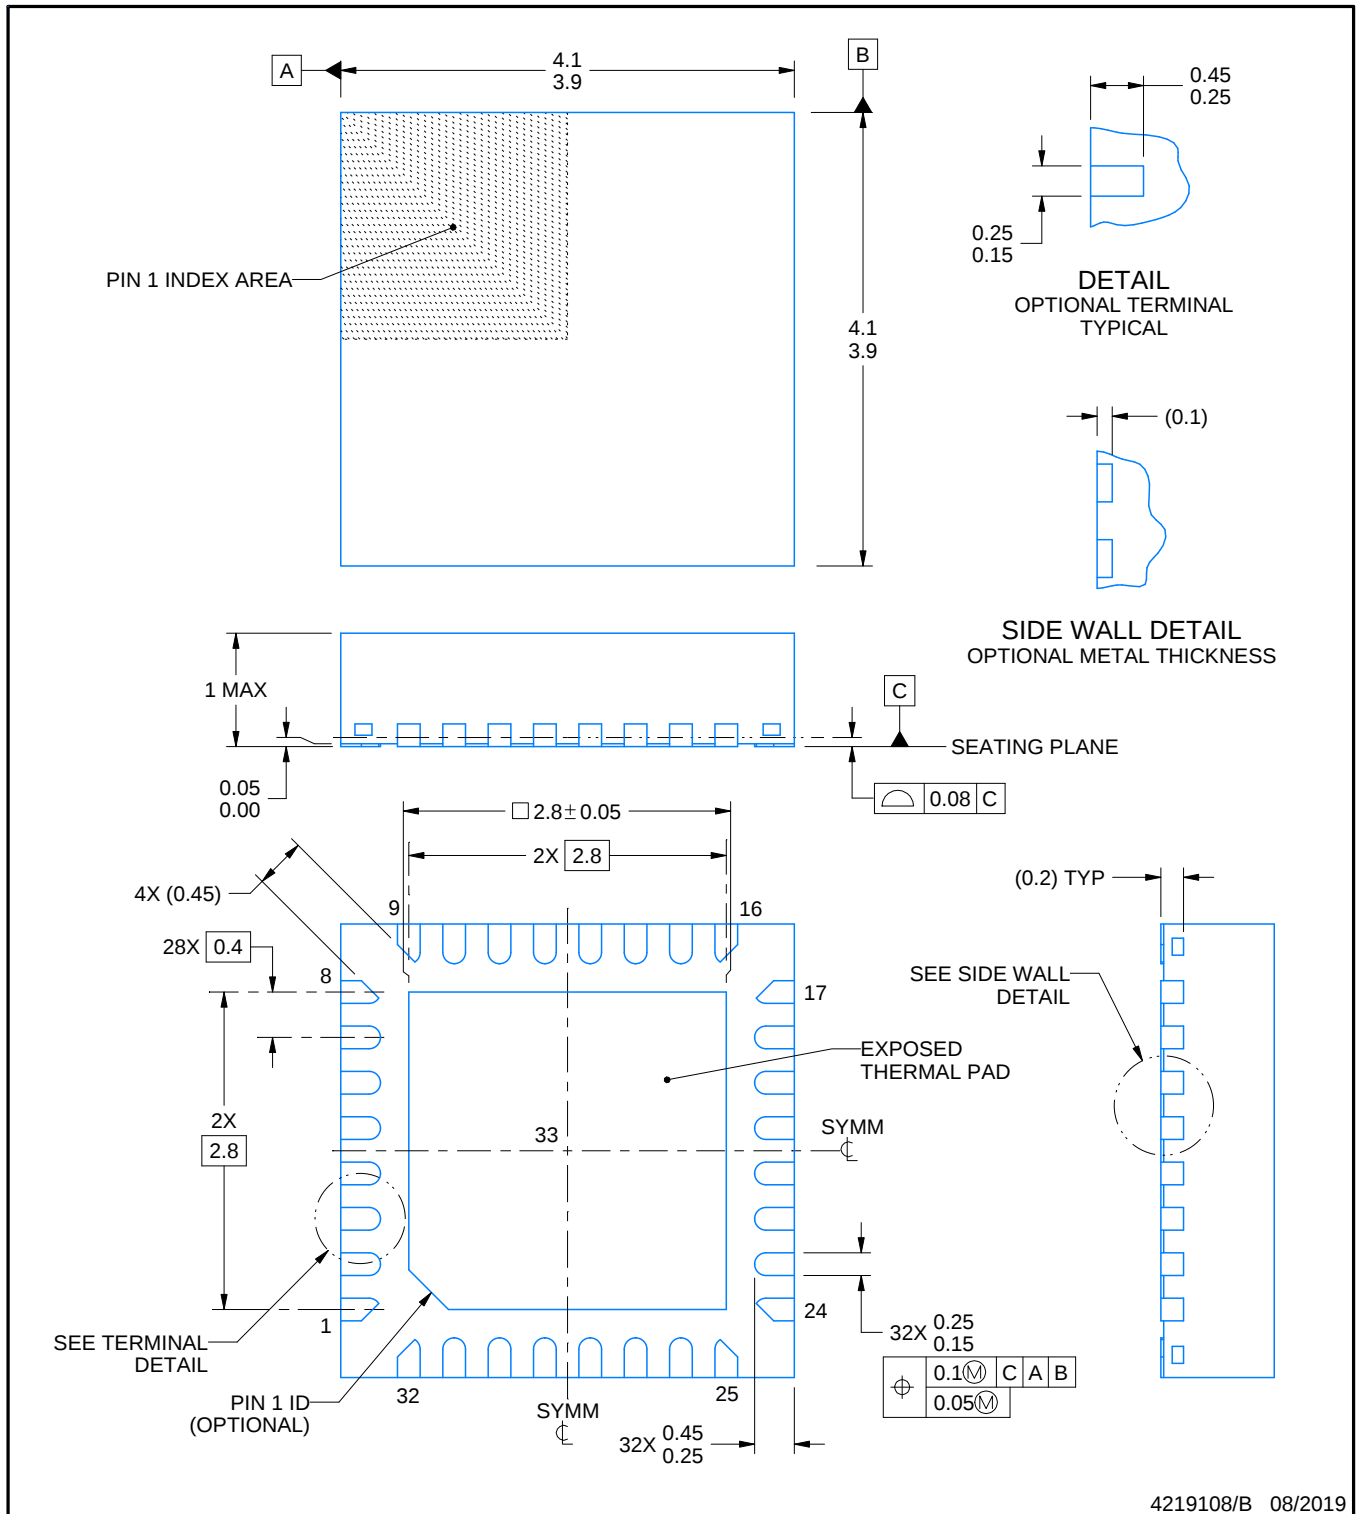


## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


**RSM0032B**

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

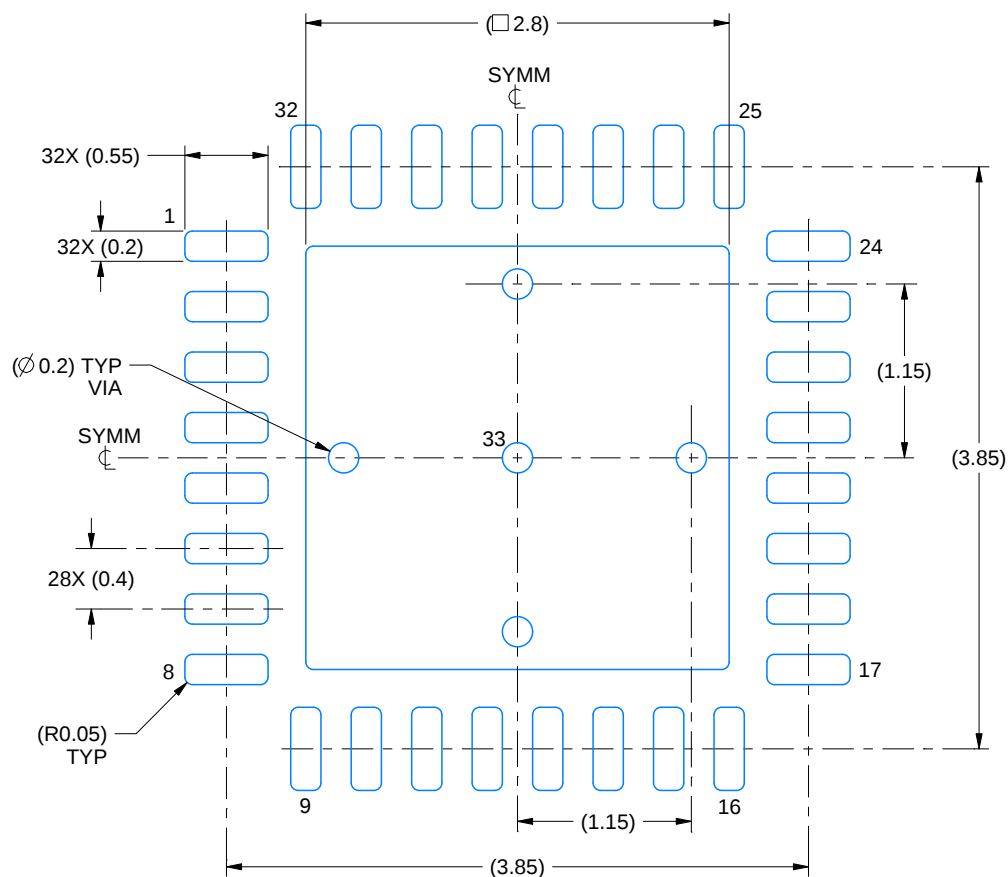

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:20X

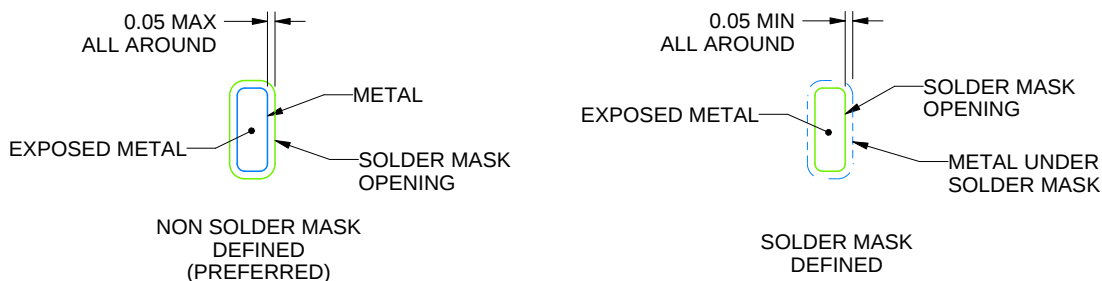

## SOLDER MASK DETAILS

4219108/B 08/2019


NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sl原因271](http://www.ti.com/lit/sl原因271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

**RSM0032B**

## VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

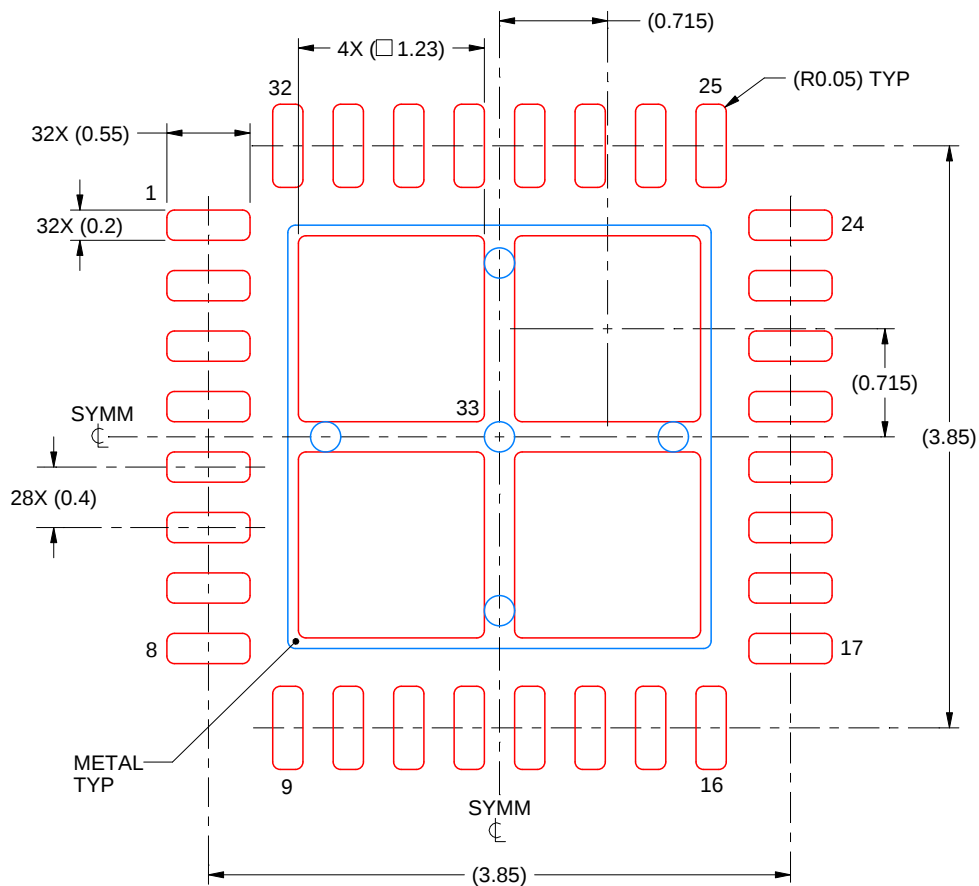

**SOLDER PASTE EXAMPLE**  
**BASED ON 0.1 mm THICK STENCIL**

**EXPOSED PAD 33:**  
**77% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE**  
**SCALE:20X**

4219108/B 08/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2020 德州仪器半导体技术（上海）有限公司