

# BFR740L3RH

## SiGe:C NPN RF bipolar transistor



Order now



Technical  
documents



Simulation



Support

## Product description

The BFR740L3RH is a wideband RF heterojunction bipolar transistor (HBT) available in a low profile package.



## Feature list

- Low noise figure  $NF_{min} = 0.5 \text{ dB}$  at 1.9 GHz 3 V, 6 mA; 0.8 dB at 5.5 GHz, 3 V, 6 mA
- High power gain  $G_{ms} = 20 \text{ dB}$  at 5.5 GHz, 3 V, 15 mA
- Low profile and small form factor leadless package

## Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

## Potential applications

- Wireless communications: WLAN 2.4 GHz and 5-6 GHz bands, WiMax and UWB
- Satellite communication systems: GNSS navigation systems (GPS, GLONASS, BeiDou, Galileo), satellite radio (SDARs, DAB) and C-band LNB
- Multimedia applications such as portable TV, CATV and FM radio
- ISM applications like RKE, AMR and Zigbee, as well as for emerging wireless applications

## Device information

**Table 1** Part information

Product name / Ordering code	Package	Pin configuration			Marking	Pieces / Reel
BFR740L3RH /BFR740L3RHE6327XTSA1	TSLP-3-9	1 = B	2 = C	3 = E	R9	15000

**Attention:** *ESD (Electrostatic discharge) sensitive device, observe handling precautions*

---

**Table of contents**

**Table of contents**

<b>Product description</b>	1
<b>Feature list</b>	1
<b>Product validation</b>	1
<b>Potential applications</b>	1
<b>Device information</b>	1
<b>Table of contents</b>	2
<b>1 Absolute maximum ratings</b>	3
<b>2 Thermal characteristics</b>	4
<b>3 Electrical characteristics</b>	5
3.1 DC characteristics	5
3.2 General AC characteristics	5
3.3 Frequency dependent AC characteristics	6
3.4 Characteristic DC diagrams	10
3.5 Characteristic AC diagrams	13
<b>4 Package information TS LP-3-9</b>	20
<b>Revision history</b>	21
<b>Disclaimer</b>	22

## Absolute maximum ratings

# 1 Absolute maximum ratings

**Table 2 Absolute maximum ratings at  $T_A = 25^\circ\text{C}$  (unless otherwise specified)**

Parameter	Symbol	Values		Unit	Note or test condition
		Min.	Max.		
Collector emitter voltage	$V_{CEO}$	-	4.0	V	Open base
			3.5		$T_A = -55^\circ\text{C}$ , open base
Collector emitter voltage			13		E-B short circuited
Collector base voltage			13		Open emitter
Emitter base voltage			1.2		Open collector
Base current	$I_B$	4	mA	$T_S \leq 105^\circ\text{C}$	-
Collector current	$I_C$	40			
Total power dissipation <sup>1)</sup>	$P_{tot}$	160	mW	$^\circ\text{C}$	-
Junction temperature	$T_J$	150			
Storage temperature	$T_{Stg}$	-55			

**Attention:** *Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding only one of these values may cause irreversible damage to the integrated circuit.*


<sup>1</sup>  $T_S$  is the soldering point temperature.  $T_S$  is measured on the emitter lead at the soldering point of the PCB.

**Thermal characteristics**

## 2 Thermal characteristics

**Table 3 Thermal resistance**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Junction - soldering point	$R_{thJS}$	–	280	–	K/W	

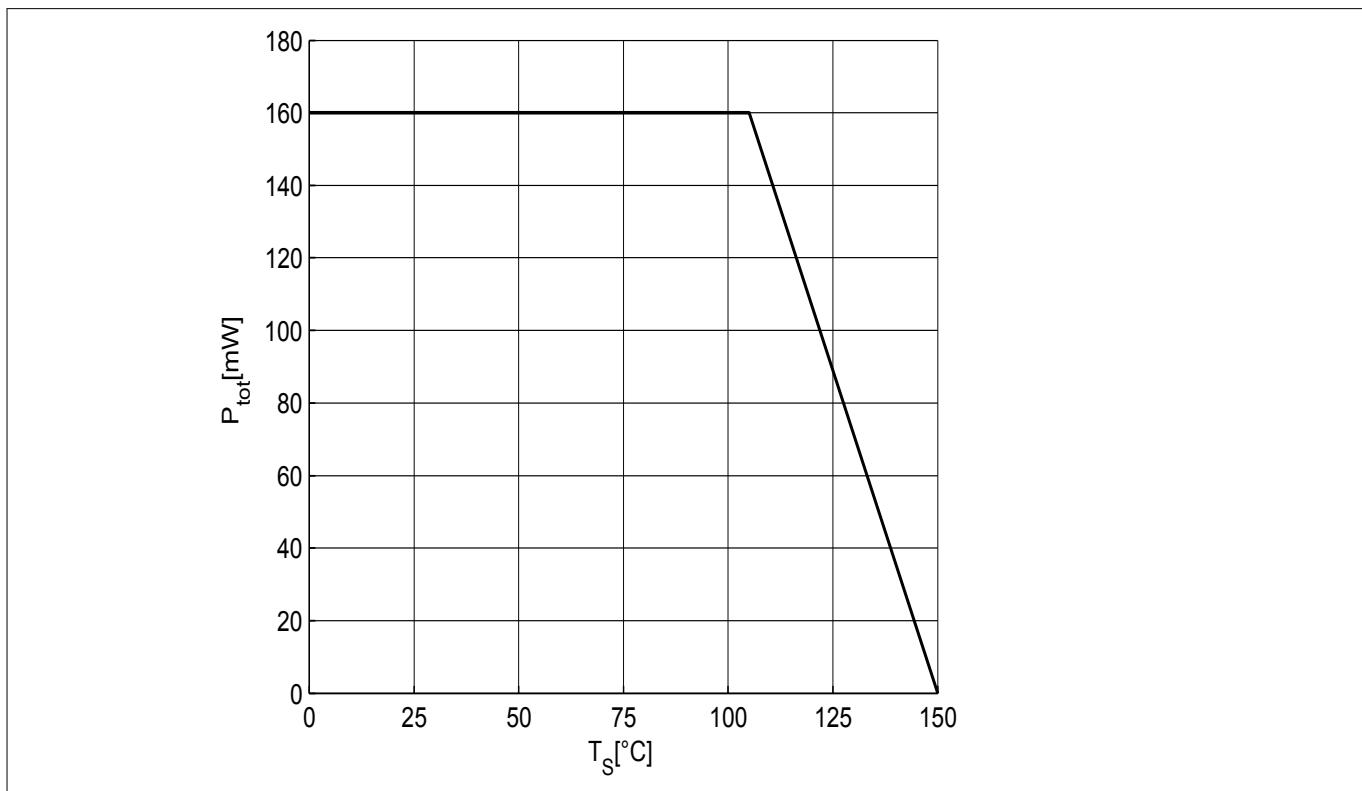

**Figure 1 Total power dissipation  $P_{tot} = f(T_S)$**

## Electrical characteristics

# 3 Electrical characteristics

## 3.1 DC characteristics

**Table 4 DC characteristics at  $T_A = 25^\circ\text{C}$**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(\text{BR})\text{CEO}}$	4	4.7	-	V	$I_C = 1 \text{ mA}, I_B = 0,$ open base
Collector emitter leakage current	$I_{\text{CES}}$	-	1 1	400 <sup>1)</sup> 40 <sup>1)</sup>	nA	$V_{\text{CE}} = 13 \text{ V}, V_{\text{BE}} = 0$ $V_{\text{CE}} = 5 \text{ V}, V_{\text{BE}} = 0,$ E-B short circuited
Collector base leakage current	$I_{\text{CBO}}$		1	40 <sup>1)</sup>		$V_{\text{CB}} = 5 \text{ V}, I_E = 0,$ open emitter
Emitter base leakage current	$I_{\text{EBO}}$		1	40 <sup>1)</sup>		$V_{\text{EB}} = 0.5 \text{ V}, I_C = 0,$ open collector
DC current gain	$h_{\text{FE}}$	160	250	400		$V_{\text{CE}} = 3 \text{ V}, I_C = 25 \text{ mA},$ pulse measured

## 3.2 General AC characteristics

**Table 5 General AC characteristics at  $T_A = 25^\circ\text{C}$**


Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Transition frequency	$f_T$	-	42	-	GHz	$V_{\text{CE}} = 3 \text{ V}, I_C = 25 \text{ mA},$ $f = 2 \text{ GHz}$
Collector base capacitance	$C_{\text{CB}}$		0.09	0.12	pF	$V_{\text{CB}} = 3 \text{ V}, V_{\text{BE}} = 0,$ $f = 1 \text{ MHz},$ emitter grounded
Collector emitter capacitance	$C_{\text{CE}}$		0.3	-		$V_{\text{CE}} = 3 \text{ V}, V_{\text{BE}} = 0,$ $f = 1 \text{ MHz},$ base grounded
Emitter base capacitance	$C_{\text{EB}}$		0.4			$V_{\text{EB}} = 0.5 \text{ V}, V_{\text{CB}} = 0,$ $f = 1 \text{ MHz},$ collector grounded

<sup>1</sup> Maximum values not limited by the device but by the short cycle time of the 100% test.

## Electrical characteristics

### 3.3 Frequency dependent AC characteristics

Measurement setup is a test fixture with Bias-T's in a  $50 \Omega$  system,  $T_A = 25^\circ\text{C}$ .

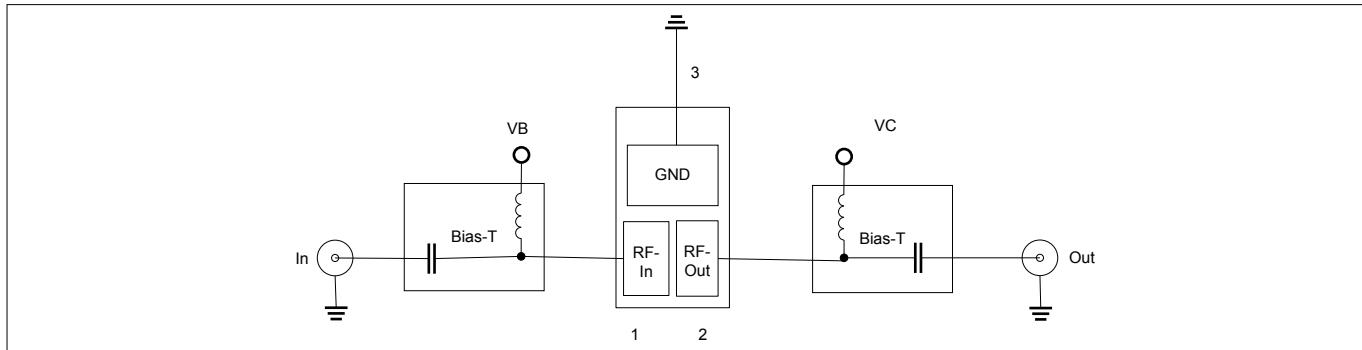

**Figure 2** Testing circuit

**Table 6** AC characteristics,  $V_{CE} = 3 \text{ V}$ ,  $f = 150 \text{ MHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	35	–	dB	$I_C = 15 \text{ mA}$
• Maximum power gain • Transducer gain			29.5			
Noise figure	$NF_{min}$ $G_{ass}$		0.45		dBm	$I_C = 6 \text{ mA}$
• Minimum noise figure • Associated gain			27.5			
Linearity	$OIP_3$ $OP_{1dB}$		21		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15 \text{ mA}$
• 3rd order intercept point at output • 1 dB gain compression point at output			3.5			

**Table 7** AC characteristics,  $V_{CE} = 3 \text{ V}$ ,  $f = 450 \text{ MHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	31	–	dB	$I_C = 15 \text{ mA}$
• Maximum power gain • Transducer gain			29			
Noise figure	$NF_{min}$ $G_{ass}$		0.45		dBm	$I_C = 6 \text{ mA}$
• Minimum noise figure • Associated gain			26.5			
Linearity	$OIP_3$ $OP_{1dB}$		21		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15 \text{ mA}$
• 3rd order intercept point at output • 1 dB gain compression point at output			7			

### Electrical characteristics

**Table 8** AC characteristics,  $V_{CE} = 3$  V,  $f = 900$  MHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	28 27	–	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.45 25		dBm	$I_C = 6$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		22.5 8		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15$ mA
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

**Table 9** AC characteristics,  $V_{CE} = 3$  V,  $f = 1.5$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	25.5 25	–	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.5 22.5		dBm	$I_C = 6$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		23 8		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15$ mA
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

**Table 10** AC characteristics,  $V_{CE} = 3$  V,  $f = 1.9$  GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	24.5 23.5	–	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.5 21		dBm	$I_C = 6$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		23 8		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15$ mA
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

### Electrical characteristics

**Table 11 AC characteristics,  $V_{CE} = 3$  V,  $f = 2.4$  GHz**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	23.5 21.5	–	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.5 19.5		dBm	$I_C = 6$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		23 8		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15$ mA
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

**Table 12 AC characteristics,  $V_{CE} = 3$  V,  $f = 3.5$  GHz**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	22 18.5	–	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.6 16.5		dBm	$I_C = 6$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		24.5 9		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15$ mA
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

**Table 13 AC characteristics,  $V_{CE} = 3$  V,  $f = 5.5$  GHz**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ms}$ $ S_{21} ^2$	–	20 14.5	–	dB	$I_C = 15$ mA
• Maximum power gain						
• Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		0.8 13		dBm	$I_C = 6$ mA
• Minimum noise figure						
• Associated gain						
Linearity	$OIP_3$ $OP_{1dB}$		25 9.5		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15$ mA
• 3rd order intercept point at output						
• 1 dB gain compression point at output						

### Electrical characteristics

**Table 14 AC characteristics,  $V_{CE} = 3 \text{ V}$ ,  $f = 10 \text{ GHz}$**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	–	13 9	–	dB	$I_C = 15 \text{ mA}$
• Maximum power gain • Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		1.3 8.5		dBm	$I_C = 6 \text{ mA}$
• Minimum noise figure • Associated gain						
Linearity	$OIP_3$ $OP_{1\text{dB}}$		24 9		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15 \text{ mA}$
• 3rd order intercept point at output • 1 dB gain compression point at output						

**Table 15 AC characteristics,  $V_{CE} = 3 \text{ V}$ ,  $f = 12 \text{ GHz}$**


Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain	$G_{ma}$ $ S_{21} ^2$	–	11 7	–	dB	$I_C = 15 \text{ mA}$
• Maximum power gain • Transducer gain						
Noise figure	$NF_{min}$ $G_{ass}$		1.5 7.5		dBm	$I_C = 6 \text{ mA}$
• Minimum noise figure • Associated gain						
Linearity	$OIP_3$ $OP_{1\text{dB}}$		20.5 6.5		dBm	$Z_S = Z_L = 50 \Omega, I_C = 15 \text{ mA}$
• 3rd order intercept point at output • 1 dB gain compression point at output						

Note:  $G_{ms} = |S_{21}| / S_{12}|$  for  $k < 1$ ;  $G_{ma} = |S_{21}| / S_{12}|(k - (k^2 - 1)^{1/2})$  for  $k > 1$ . In order to get the  $NF_{min}$  values stated in this chapter, the test fixture losses have been subtracted from all measured results.  $OIP_3$  value depends on termination of all intermodulation frequency components. Termination used for this measurement is  $50 \Omega$  from 0.2 MHz to 12 GHz.


**Electrical characteristics**

**3.4**

**Characteristic DC diagrams**

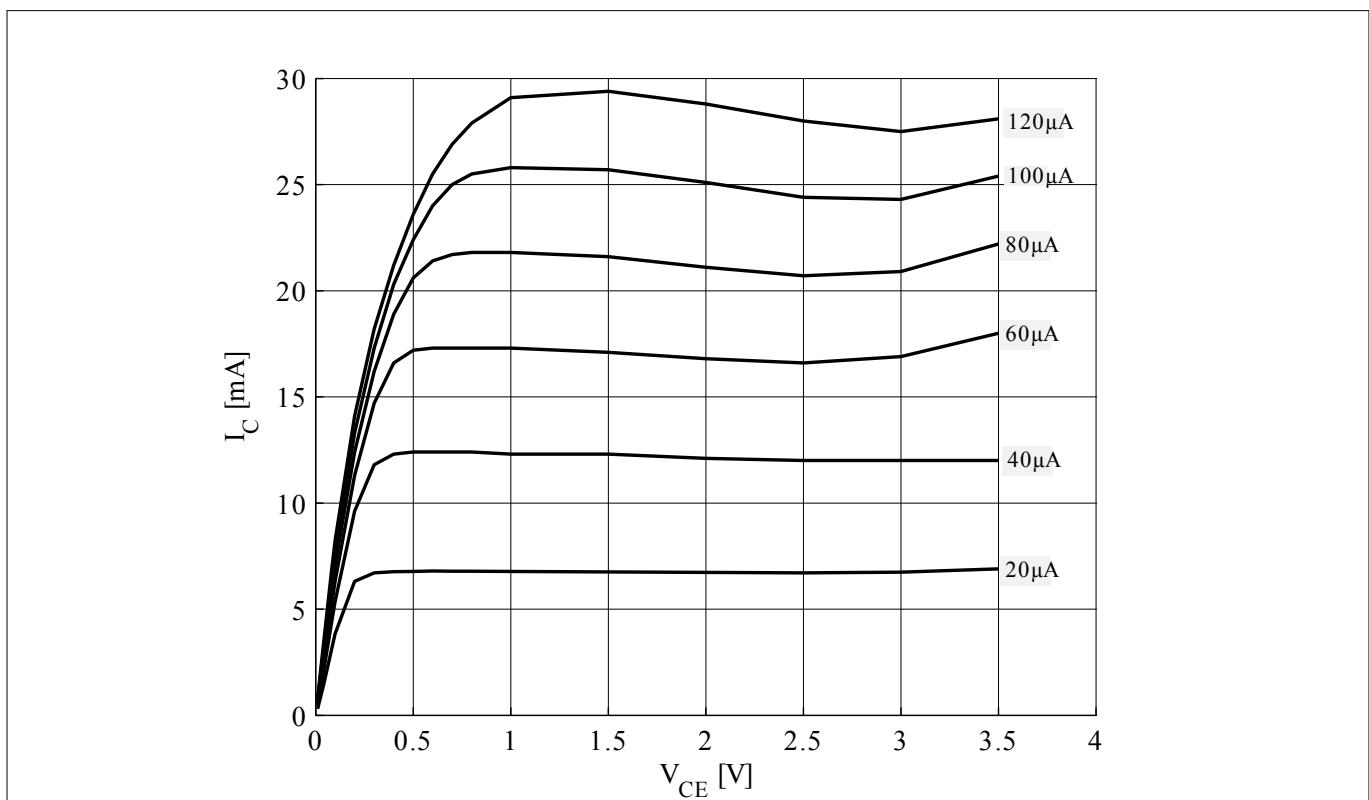


**Figure 3** Collector current vs. collector emitter voltage  $I_C = f(V_{CE})$ ,  $I_B$  = parameter

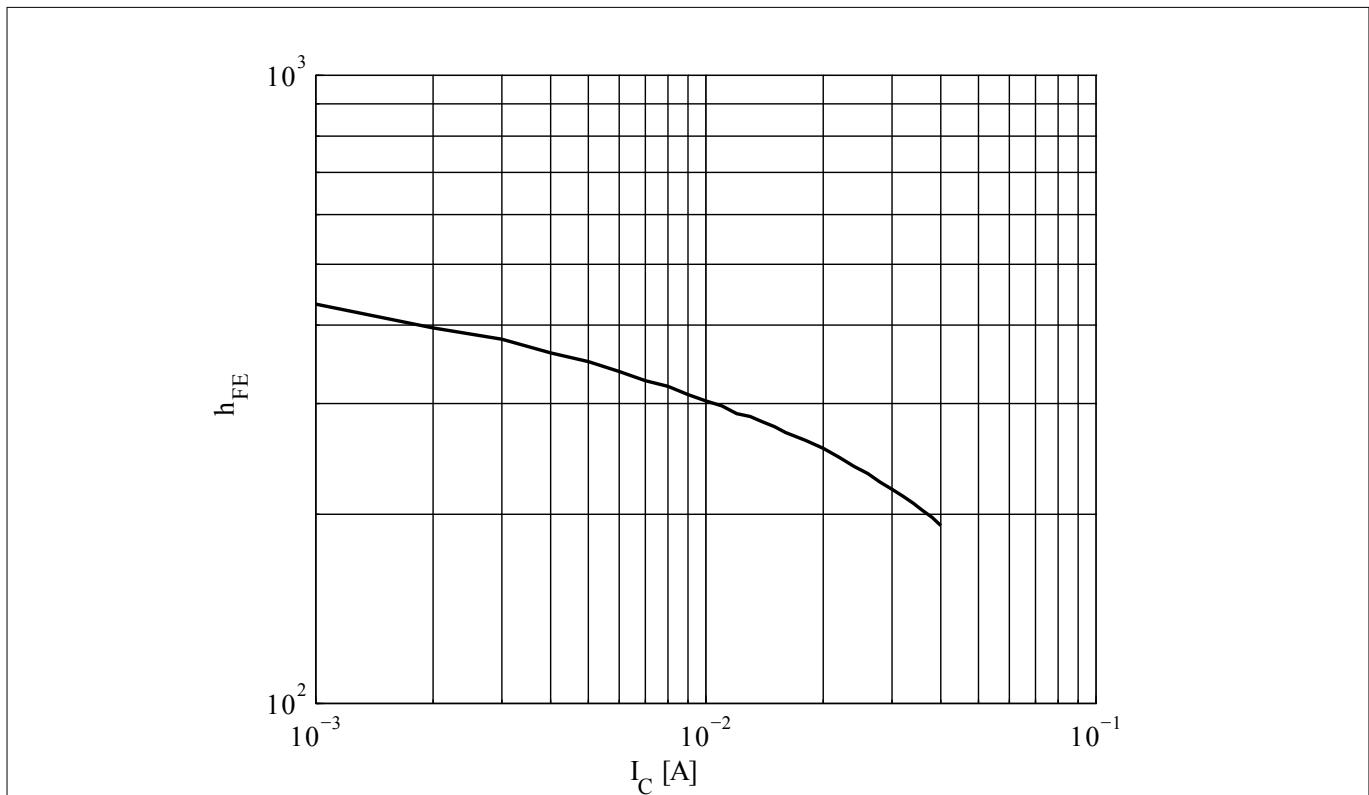


**Figure 4** DC current gain  $h_{FE} = f(I_C)$ ,  $V_{CE} = 3$  V

**Electrical characteristics**

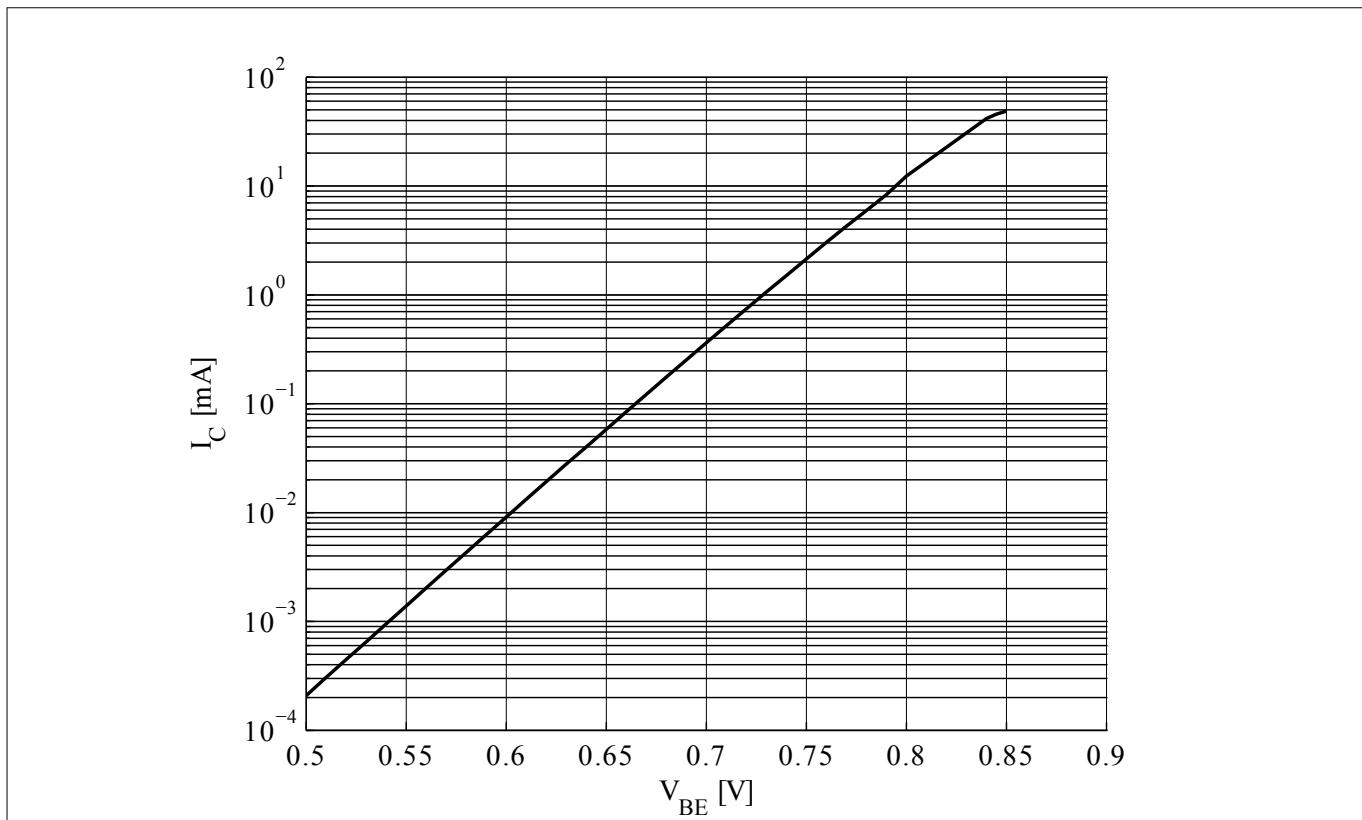


**Figure 5** **Collector current vs. base emitter forward voltage  $I_C = f(V_{BE})$ ,  $V_{CE} = 2 \text{ V}$**

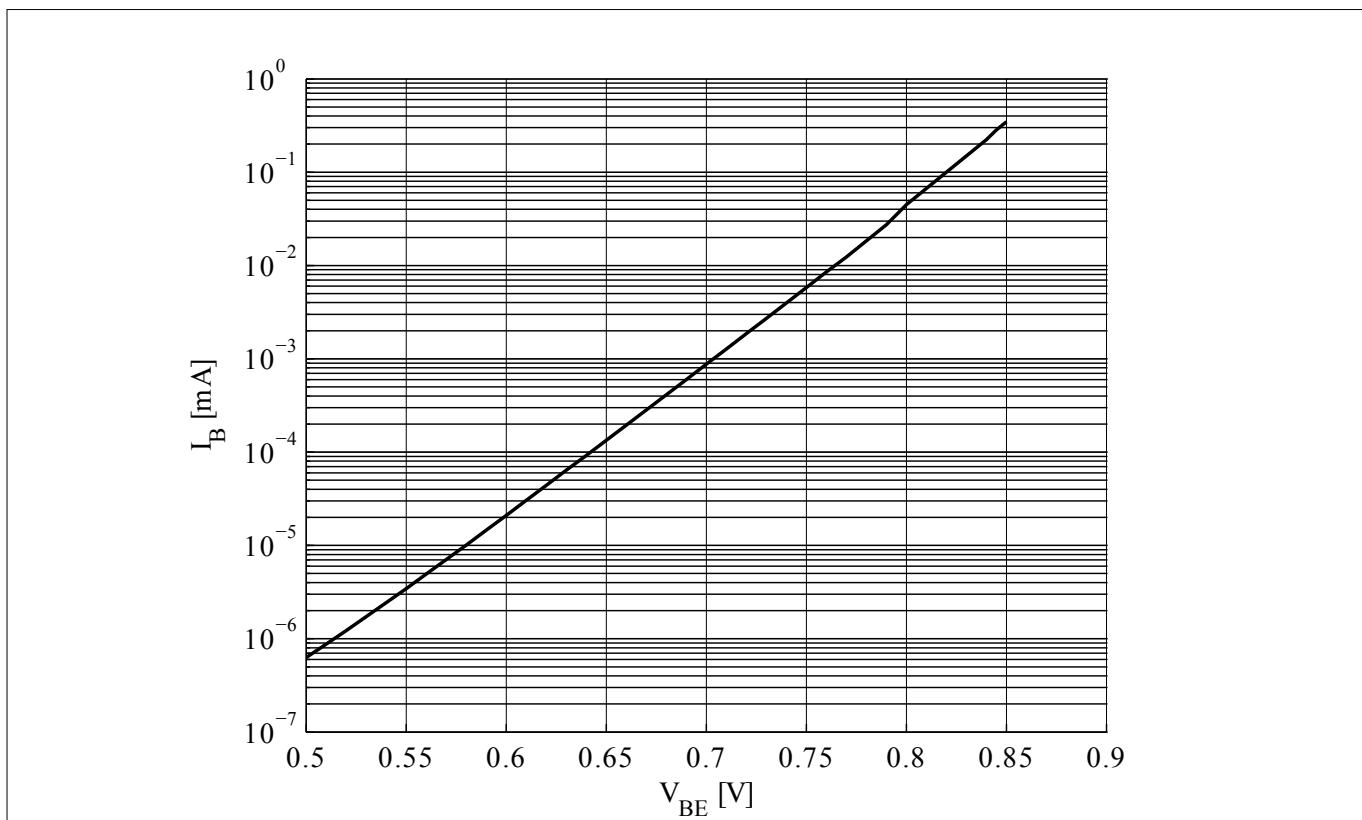

**Figure 6** **Base current vs. base emitter forward voltage  $I_B = f(V_{BE})$ ,  $V_{CE} = 2 \text{ V}$**

**Electrical characteristics**

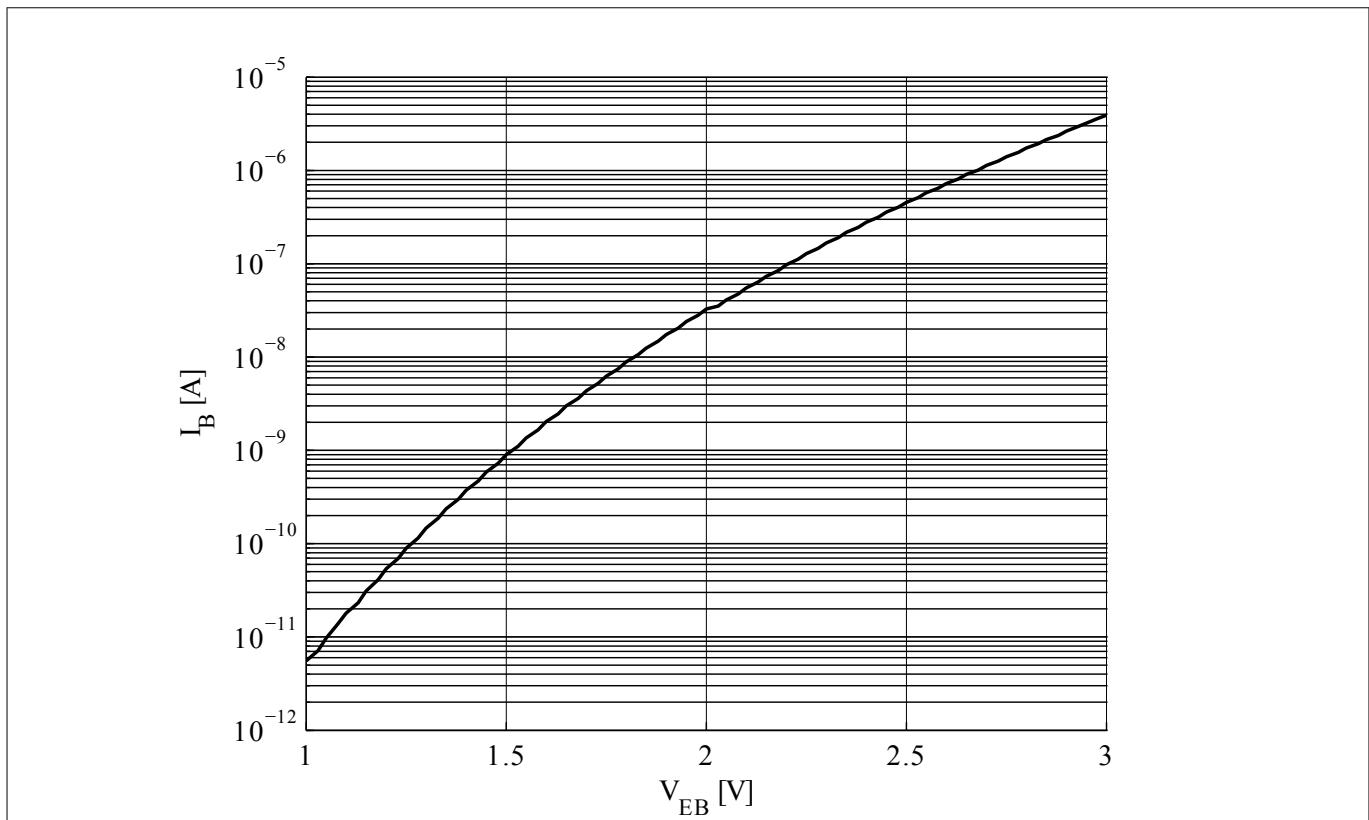


**Figure 7**      **Base current vs. base emitter reverse voltage  $I_B = f(V_{EB})$ ,  $V_{CE} = 2$  V**


## Electrical characteristics

### 3.5

### Characteristic AC diagrams

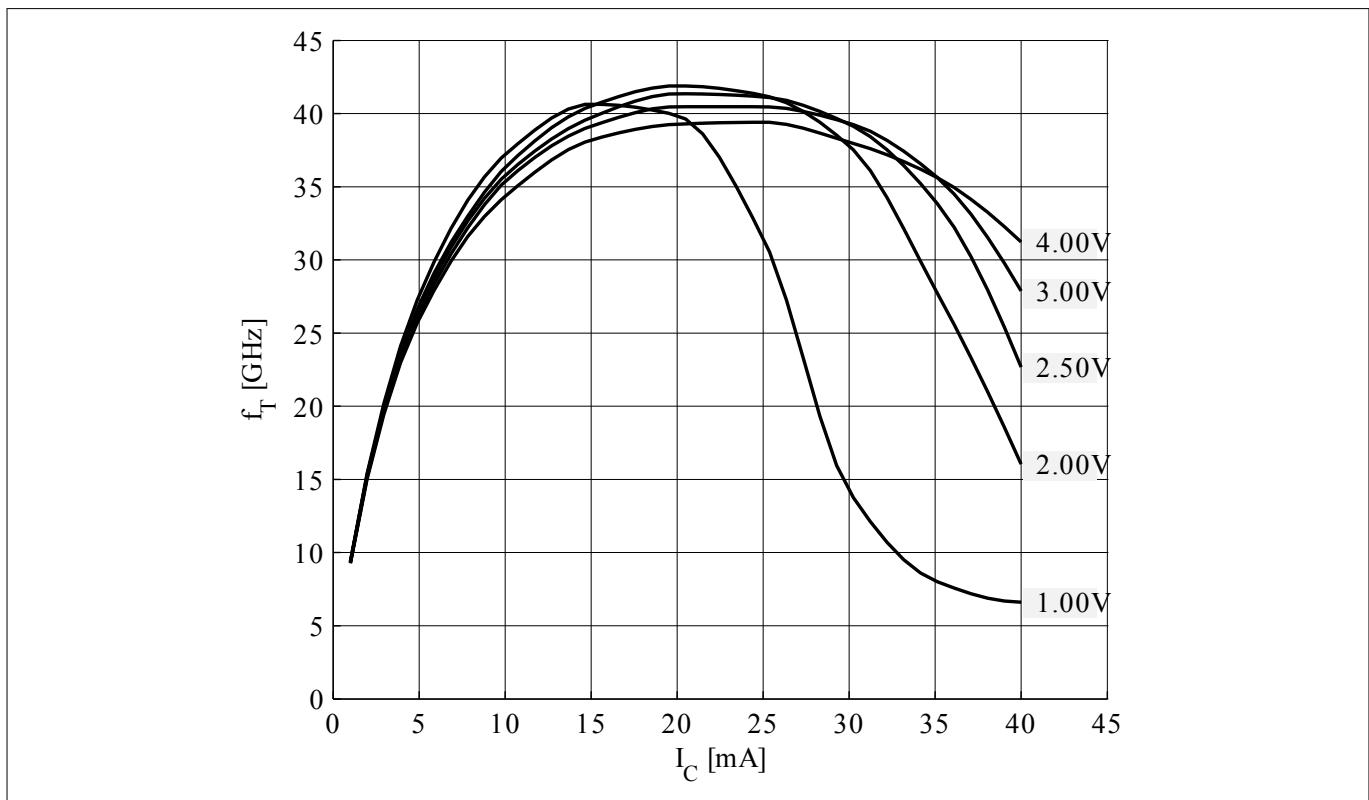


**Figure 8** Transition frequency  $f_T = f(I_C)$ ,  $f = 2$  GHz,  $V_{CE}$  = parameter

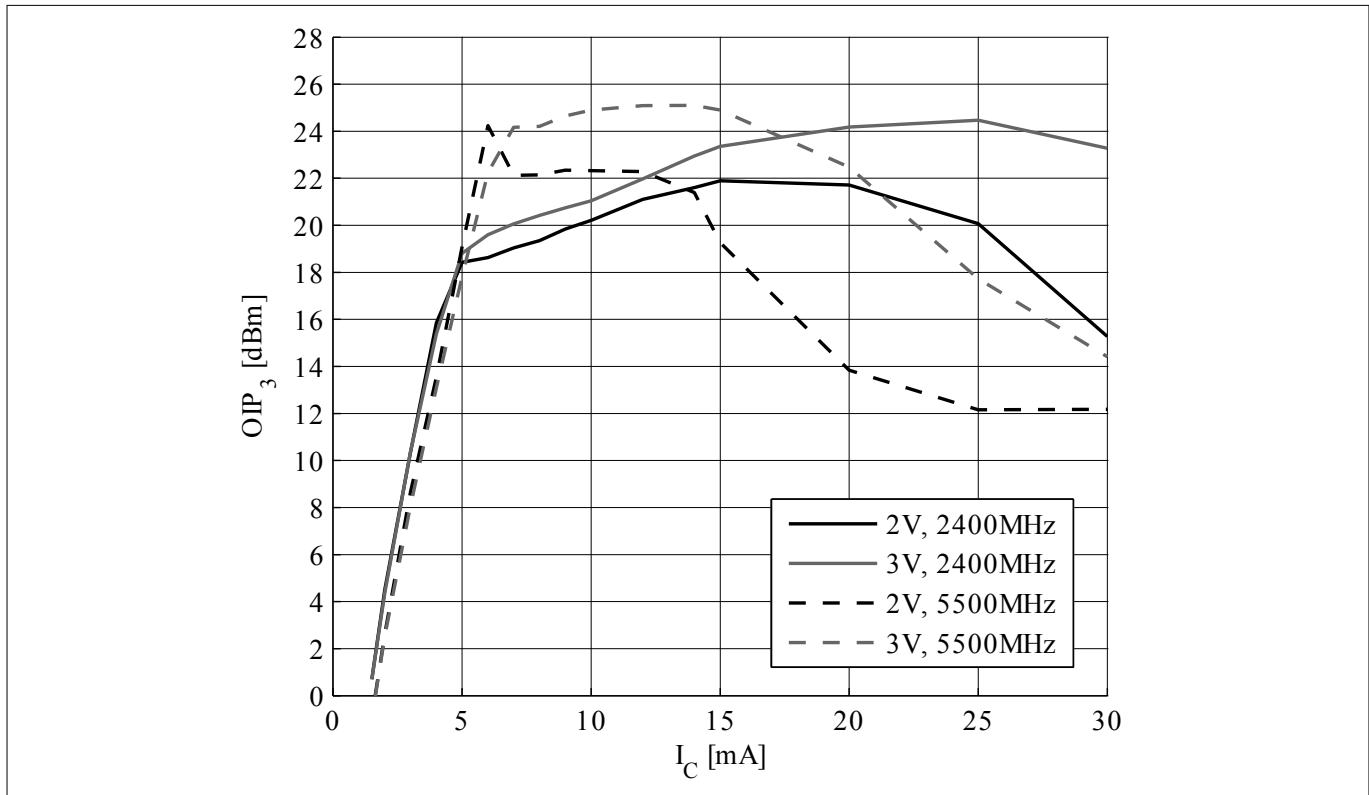


**Figure 9** 3rd order intercept point at output  $OIP_3 = f(I_C)$ ,  $Z_S = Z_L = 50 \Omega$ ,  $V_{CE}$ ,  $f$  = parameter

### Electrical characteristics

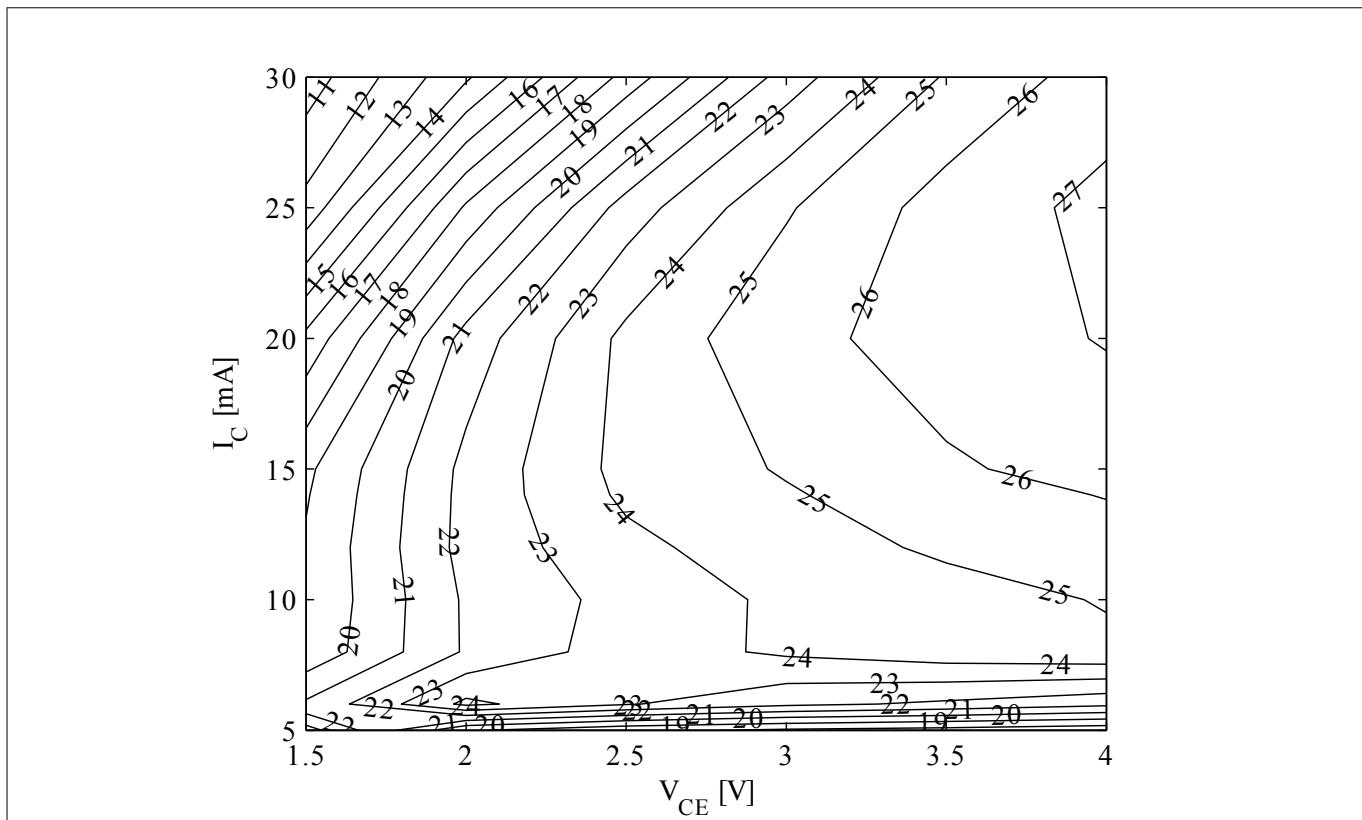


**Figure 10**      **3rd order intercept point at output  $OIP_3$  [dBm] =  $f(I_C, V_{CE})$ ,  $Z_S = Z_L = 50 \Omega$ ,  $f = 5.5$  GHz**

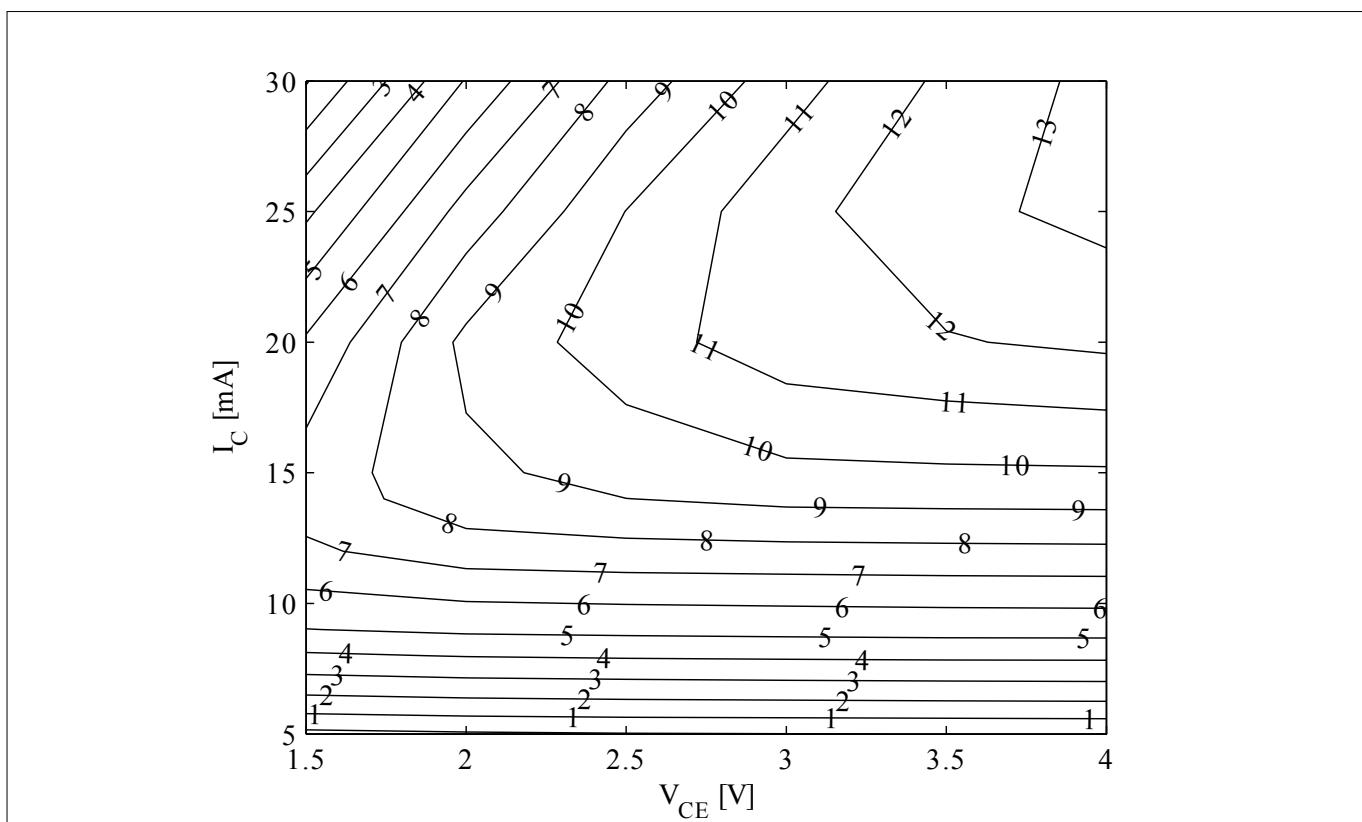


**Figure 11**      **Compression point at output  $OP_{1dB}$  [dBm] =  $f(I_C, V_{CE})$ ,  $Z_S = Z_L = 50 \Omega$ ,  $f = 5.5$  GHz**

**Electrical characteristics**

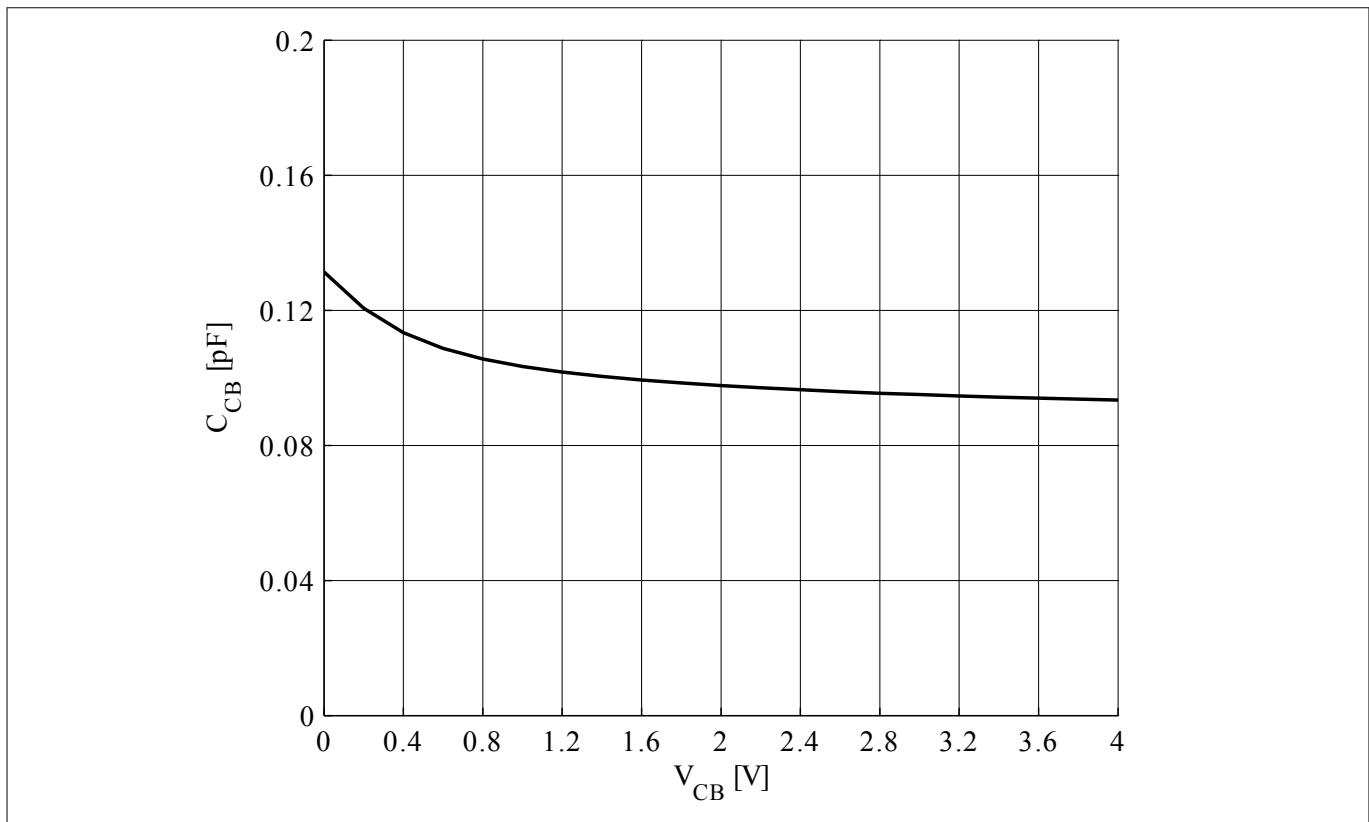


**Figure 12** **Collector base capacitance  $C_{CB} = f(V_{CB})$ ,  $f = 1$  MHz**

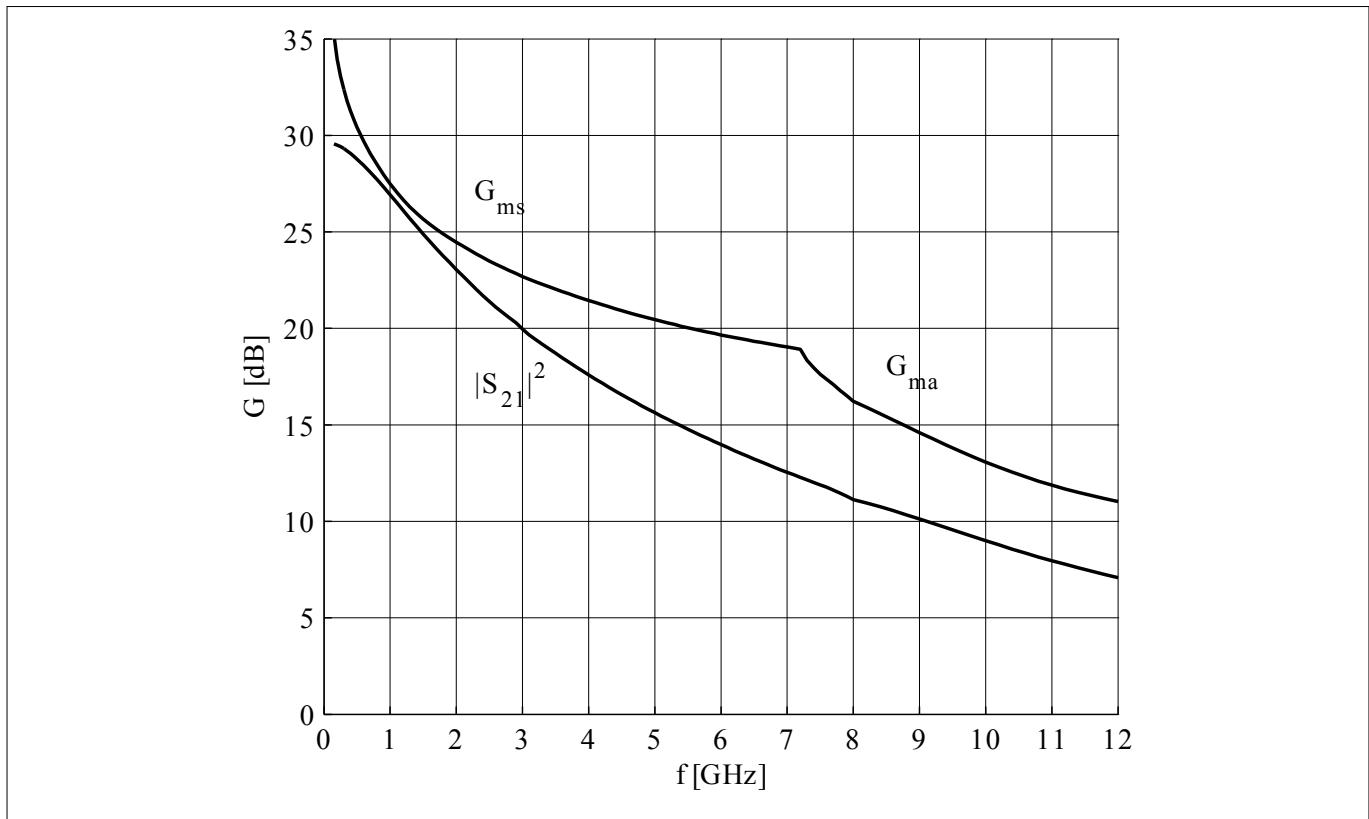


**Figure 13** **Gain  $G_{ma}$ ,  $G_{ms}$ ,  $|S_{21}|^2 = f(f)$ ,  $V_{CE} = 3$  V,  $I_C = 15$  mA**

### Electrical characteristics

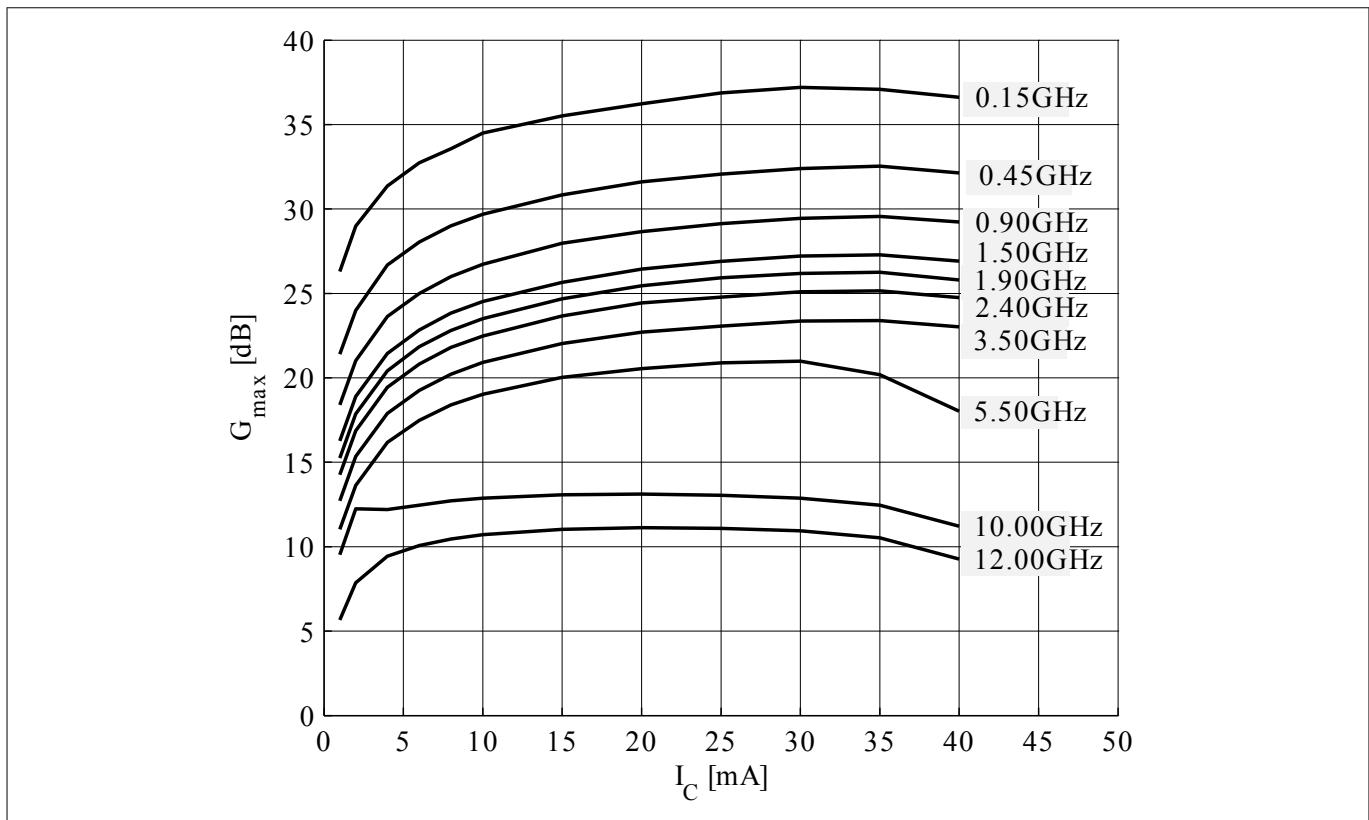


**Figure 14** Maximum power gain  $G_{\max} = f(I_C)$ ,  $V_{CE} = 3$  V,  $f$  = parameter

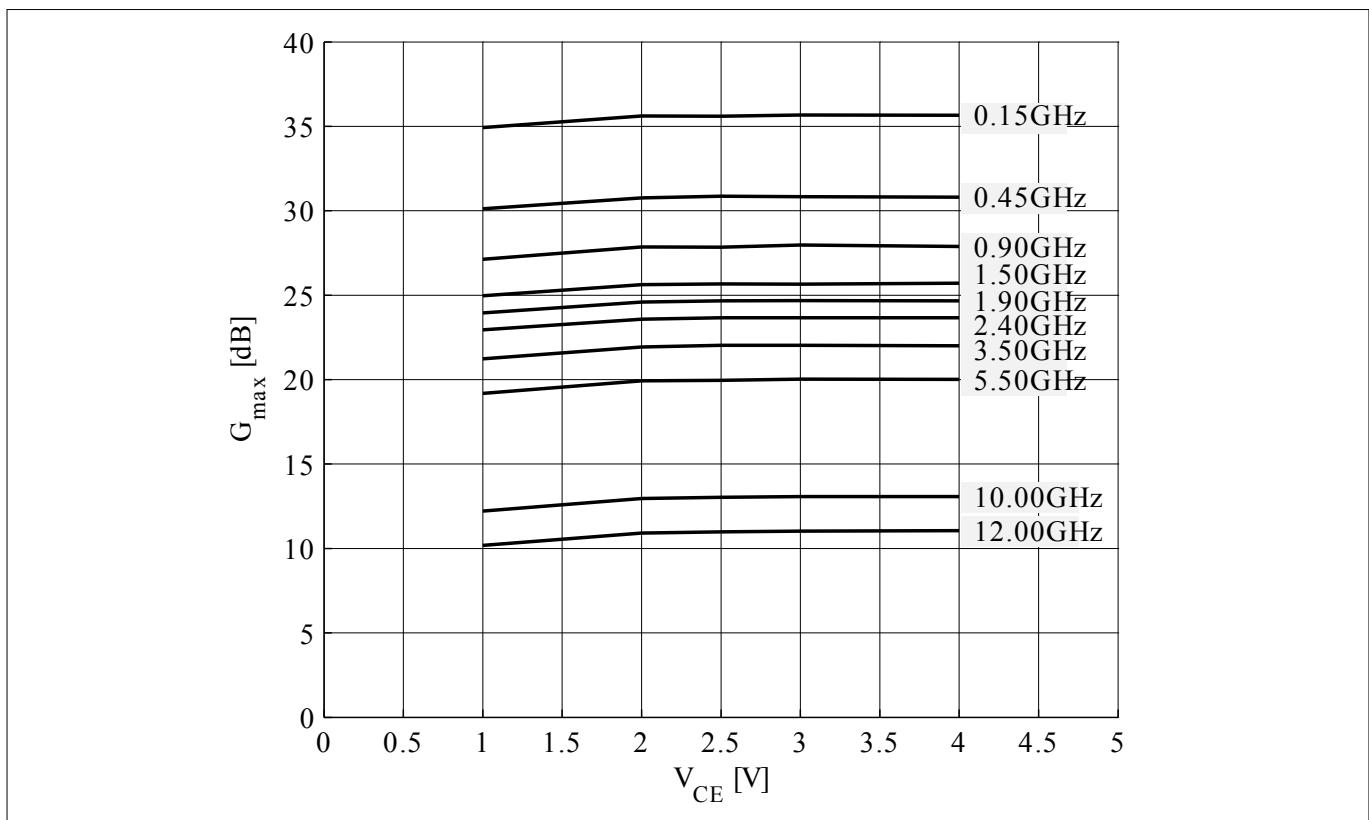


**Figure 15** Maximum power gain  $G_{\max} = f(V_{CE})$ ,  $I_C = 15$  mA,  $f$  = parameter

**Electrical characteristics**

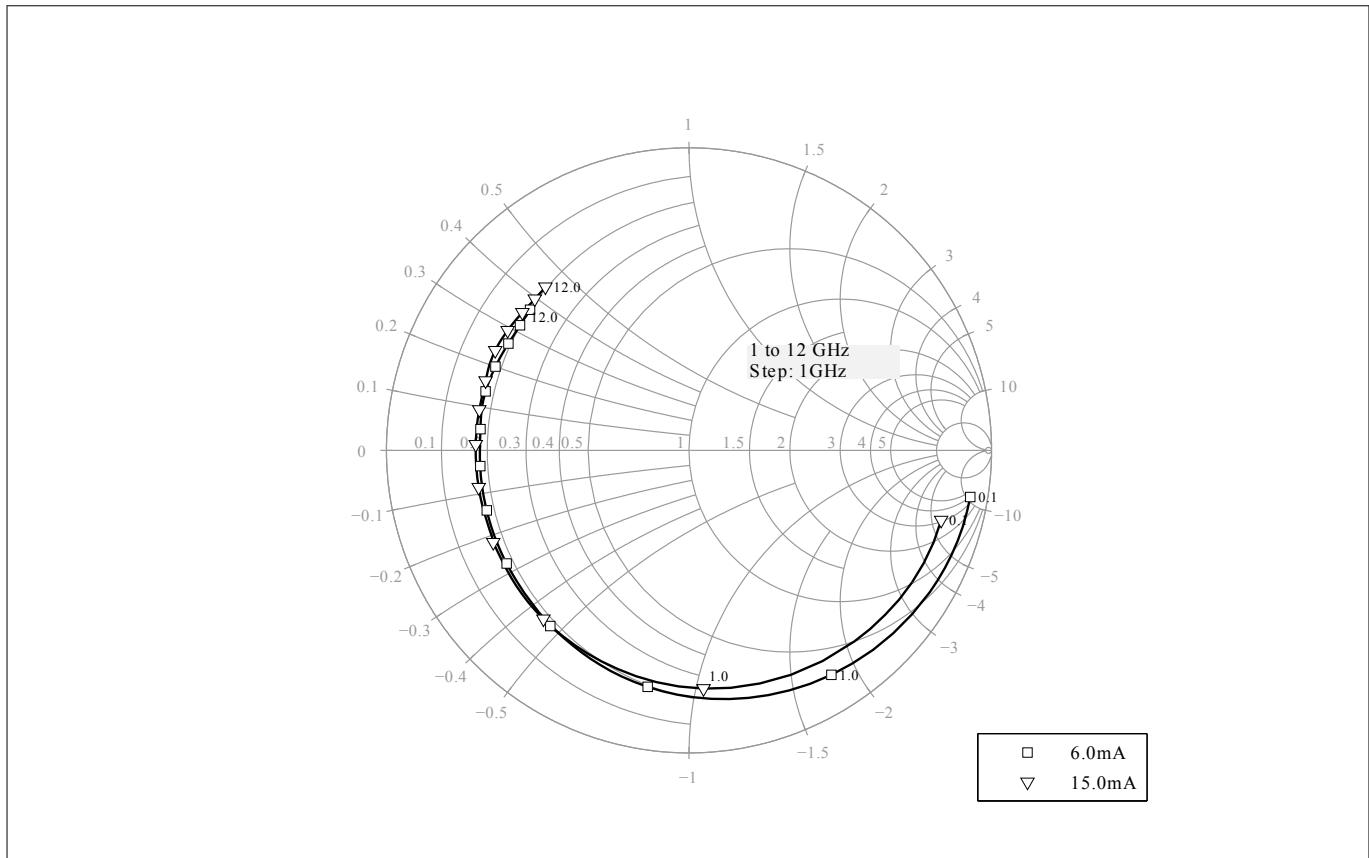


**Figure 16**      **Input reflection coefficient  $S_{11} = f(f)$ ,  $V_{CE} = 3\text{ V}$ ,  $I_C = 6 / 15\text{ mA}$**

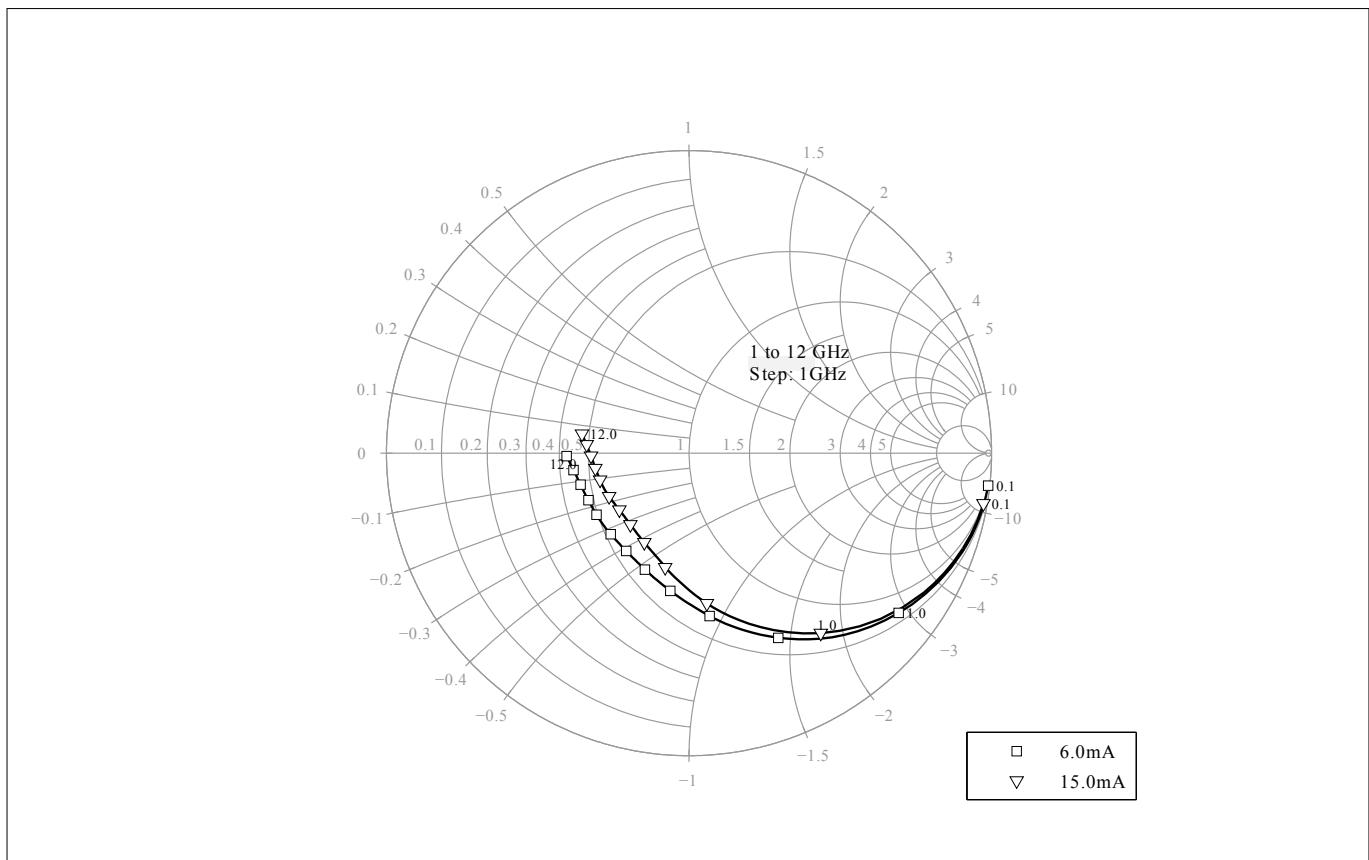


**Figure 17**      **Output reflection coefficient  $S_{22} = f(f)$ ,  $V_{CE} = 3\text{ V}$ ,  $I_C = 6 / 15\text{ mA}$**

### Electrical characteristics

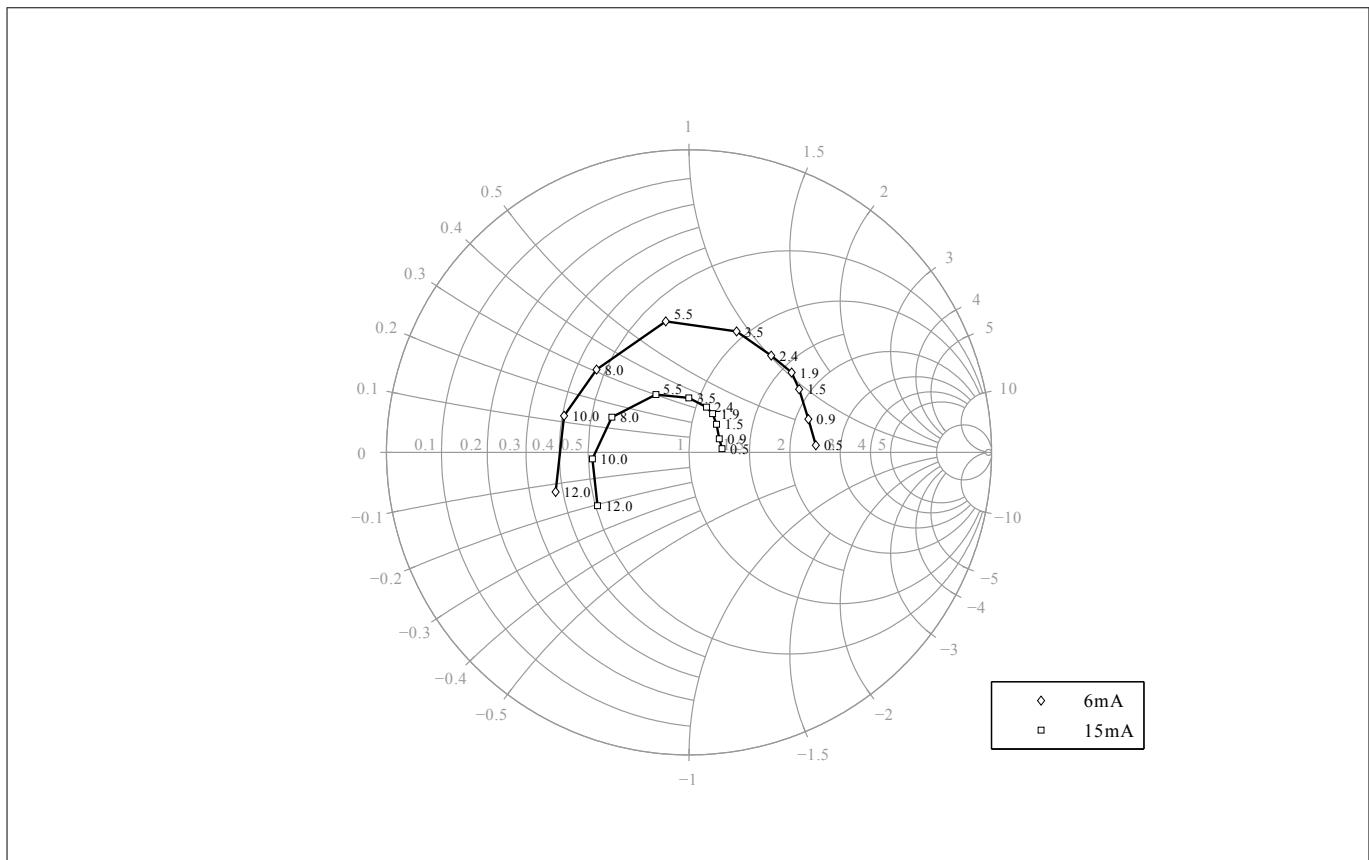


**Figure 18** Source impedance for minimum noise figure  $Z_{S,\text{opt}} = f(f)$ ,  $V_{CE} = 3 \text{ V}$ ,  $I_C = 6 / 15 \text{ mA}$

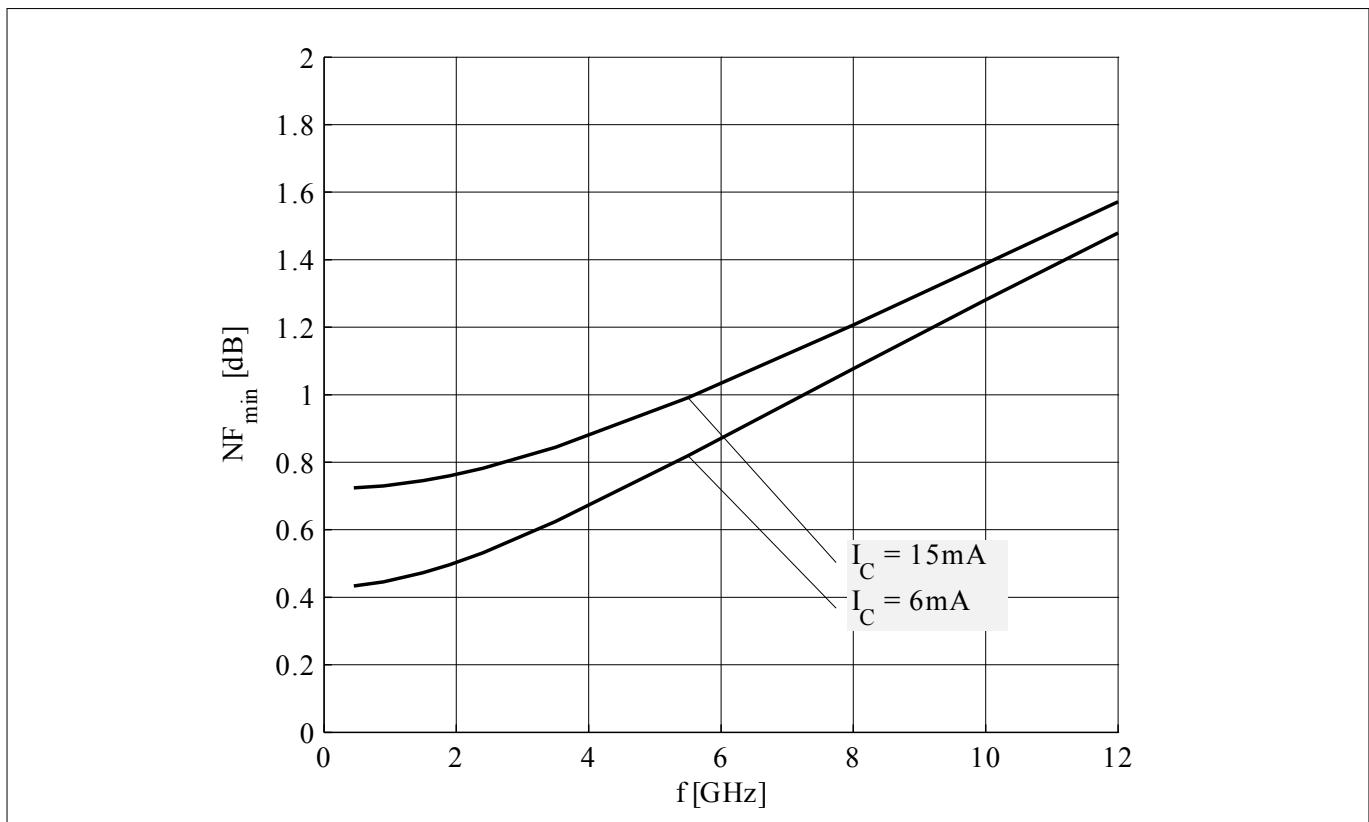


**Figure 19** Noise figure  $NF_{\min} = f(f)$ ,  $V_{CE} = 3 \text{ V}$ ,  $Z_S = Z_{S,\text{opt}}$ ,  $I_C = 6 / 15 \text{ mA}$

### Electrical characteristics

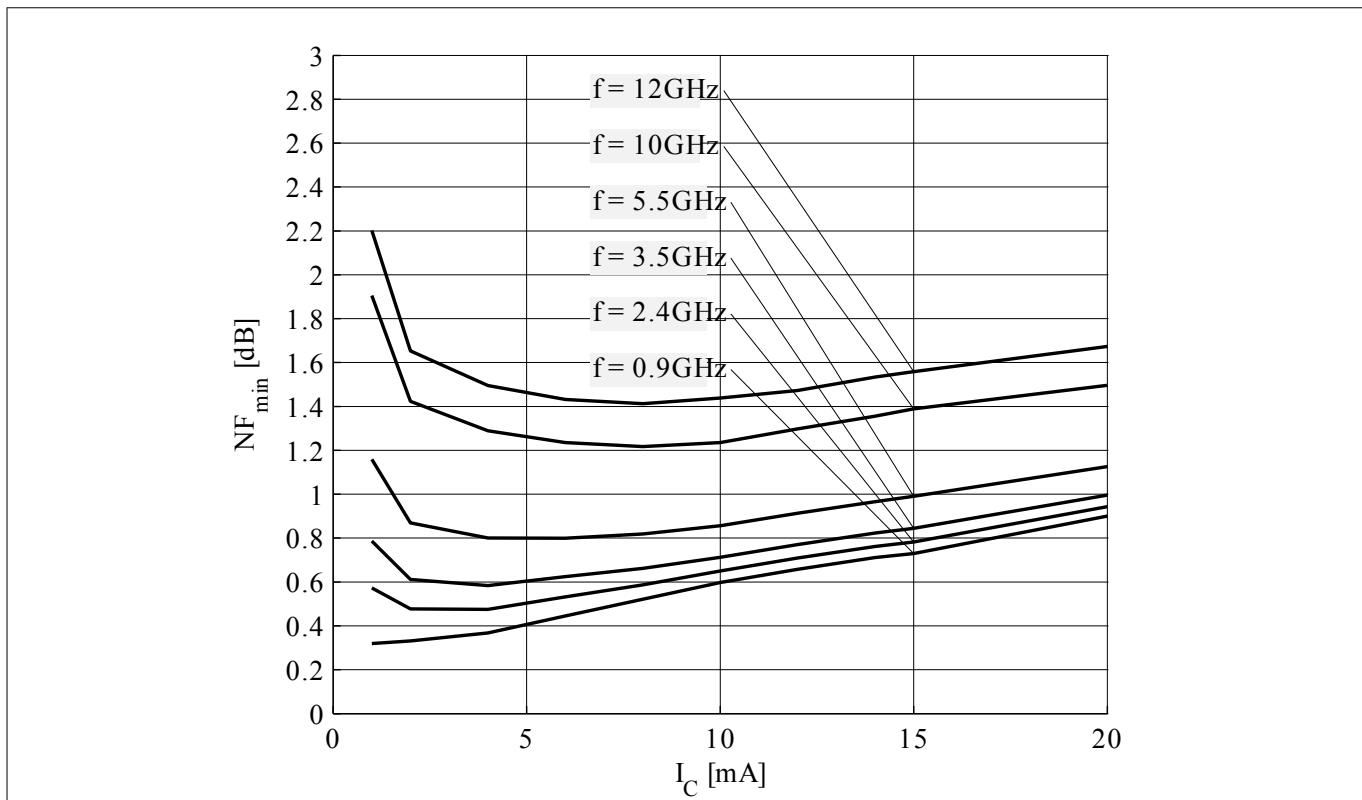

**Figure 20** Noise figure  $NF_{min} = f(I_C)$ ,  $V_{CE} = 3$  V,  $Z_S = Z_{S,opt}$ ,  $f = \text{parameter}$

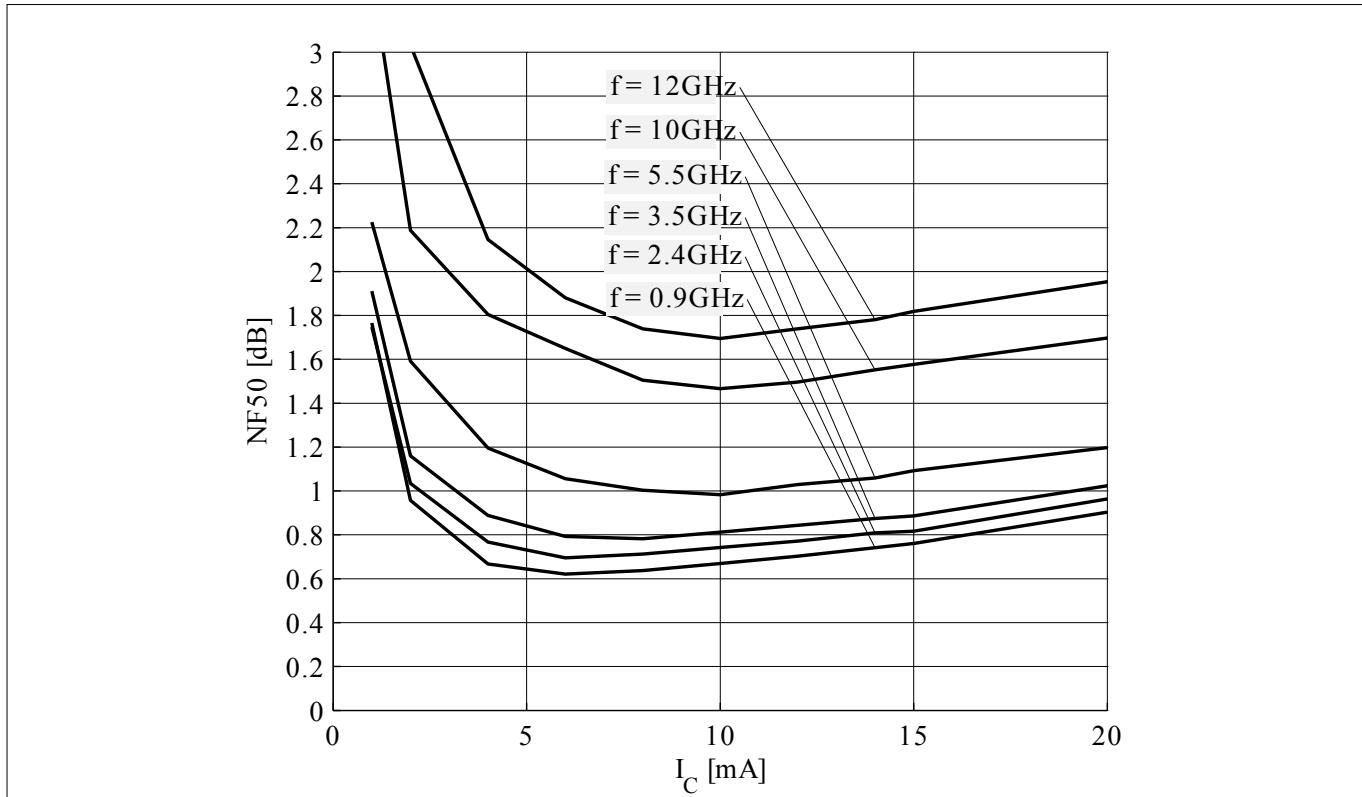


**Figure 21** Noise figure  $NF_{50} = f(I_C)$ ,  $V_{CE} = 3$  V,  $Z_S = 50$   $\Omega$ ,  $f = \text{parameter}$


Note: The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves.  $T_A = 25$  °C.

## Package information TSLP-3-9


### 4 Package information TSLP-3-9

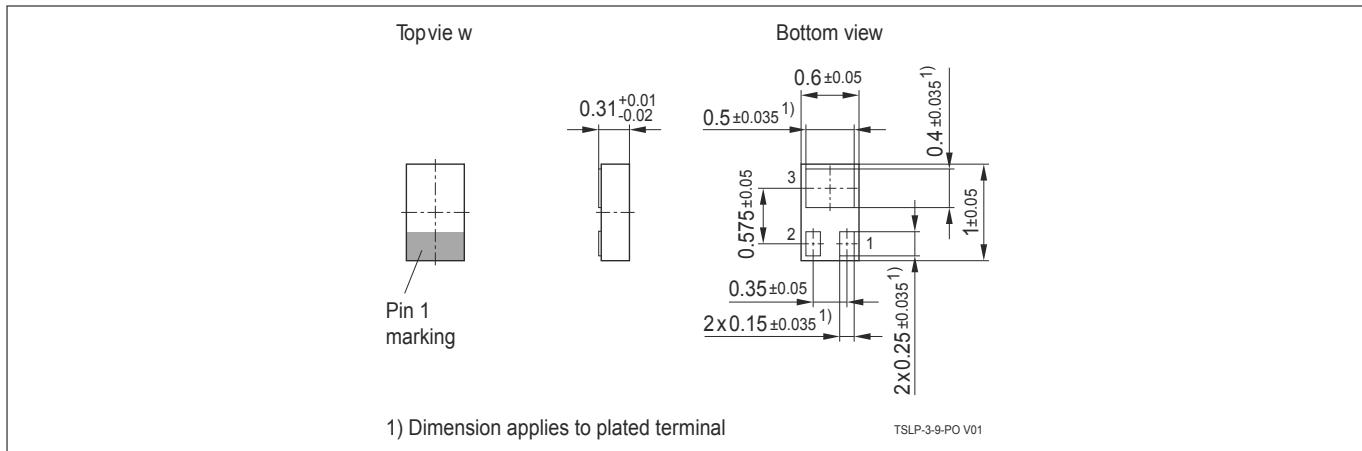


**Figure 22 Package outline (dimension in mm)**

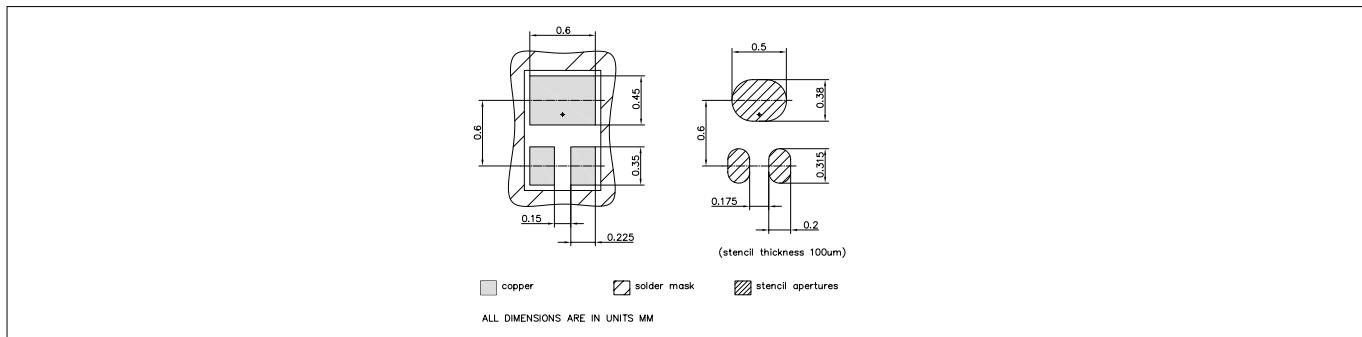

**Figure 23 Foot print**

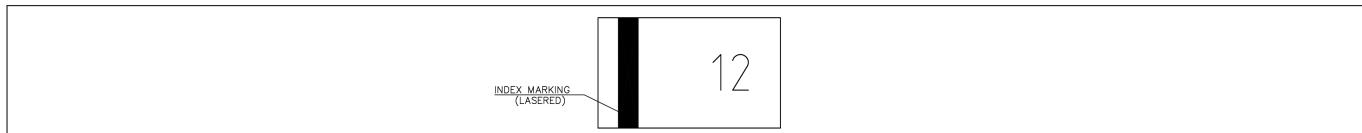

**Figure 24 Marking layout example**

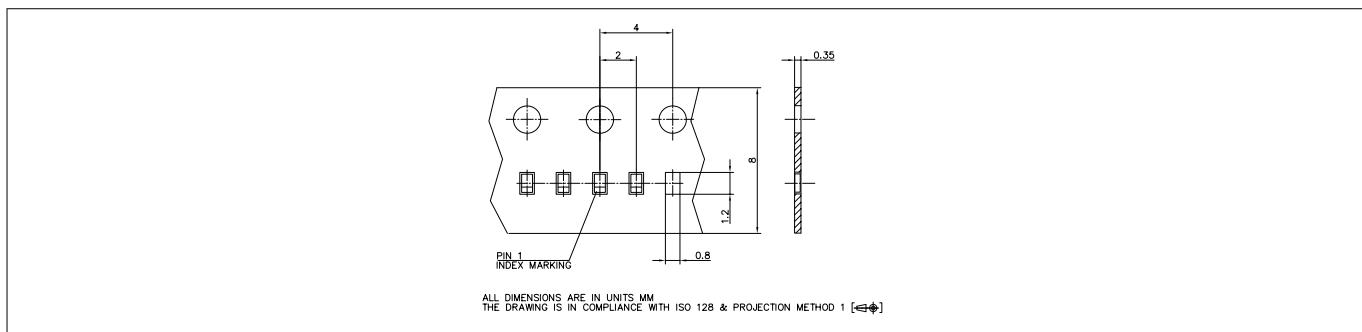

**Figure 25 Tape dimensions**

Note: See our [Recommendations for Printed Circuit Board Assembly of TSLP/TSSLP/TSNP Packages](#).  
The marking layout is an example. For the real marking code refer to the device information on the first page. The number of characters shown in the layout example is not necessarily the real one. The marking layout can consist of less characters.

---

**Revision history**

## **Revision history**

<b>Document version</b>	<b>Date of release</b>	<b>Description of changes</b>
2.0	2018-09-26	New datasheet layout.

## **Trademarks**

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2018-09-26**

**Published by**

**Infineon Technologies AG  
81726 Munich, Germany**

**© 2018 Infineon Technologies AG  
All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference  
IFX-xlx1525274502010**

## **IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

## **WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury