

BFP720FESD

SiGe:C NPN RF bipolar transistor



Order now



Technical
documents



Simulation



Support

Product description

The BFP720FESD is a wideband RF heterojunction bipolar transistor (HBT) with an integrated ESD protection.



Feature list

- Unique combination of high end RF performance and robustness: 21 dBm maximum RF input power, 2 kV HBM ESD hardness
- High transition frequency $f_T = 45$ GHz to enable low noise figure at high frequencies: $NF_{min} = 0.8$ dB at 5.5 GHz, 3 V, 5 mA
- High gain $G_{ms} = 22$ dB at 5.5 GHz, 3 V, 15 mA
- $OIP_3 = 21$ dBm at 5.5 GHz, 3 V, 15 mA

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Potential applications

- Wireless communications: WLAN, WiMax and UWB
- Satellite communication systems: GNSS navigation systems (GPS, GLONASS, BeiDou, Galileo), satellite radio (SDARs, DAB) and C-band LNB
- Multimedia applications such as portable TV, CATV and FM radio
- ISM applications like RKE, AMR and Zigbee, as well as for emerging wireless applications

Device information

Table 1 Part information

Product name / Ordering code	Package	Pin configuration				Marking	Pieces / Reel
BFP720FESD / BFP720FESDH6327XTSA1	TSFP-4-1	1 = B	2 = E	3 = C	4 = E	T3s	3000

Attention: *ESD (Electrostatic discharge) sensitive device, observe handling precautions*

Table of contents

Table of contents

Product description	1
Feature list	1
Product validation	1
Potential applications	1
Device information	1
Table of contents	2
1 Absolute maximum ratings	3
2 Thermal characteristics	4
3 Electrical characteristics	5
3.1 DC characteristics	5
3.2 General AC characteristics	5
3.3 Frequency dependent AC characteristics	6
3.4 Characteristic DC diagrams	10
3.5 Characteristic AC diagrams	13
4 Package information TSFP-4-1	19
Revision history	20
Disclaimer	21

Absolute maximum ratings

1 Absolute maximum ratings

Table 2 Absolute maximum ratings at $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Parameter	Symbol	Values		Unit	Note or test condition
		Min.	Max.		
Collector emitter voltage	V_{CEO}	-	4.2	V	Open base
			3.7		$T_A = -55^\circ\text{C}$, open base
Collector base voltage ¹⁾	V_{CBO}		4.9		Open emitter
			4.4		$T_A = -55^\circ\text{C}$, open emitter
Collector emitter voltage ²⁾	V_{CES}		4.2		E-B short circuited
			3.7		$T_A = -55^\circ\text{C}$, E-B short circuited
Base current	I_B	-10	3	mA	-
Collector current	I_C	-	30		
RF input power	P_{RFin}	-	21	dBm	
ESD stress pulse	V_{ESD}	-2	2	kV	HBM, all pins, acc. to JESD22-A114
Total power dissipation ³⁾	P_{tot}	-	100	mW	$T_S \leq 109^\circ\text{C}$
Junction temperature	T_J	-	150	°C	-
Storage temperature	T_{Stg}	-55			

Attention: *Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding only one of these values may cause irreversible damage to the integrated circuit.*

¹ V_{CBO} is similar to V_{CEO} due to design.

² V_{CES} is identical to V_{CEO} due to design.

³ T_S is the soldering point temperature. T_S is measured on the emitter lead at the soldering point of the PCB.

Thermal characteristics

2 Thermal characteristics

Table 3 Thermal resistance

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Junction - soldering point	R_{thJS}	-	405	-	K/W	-

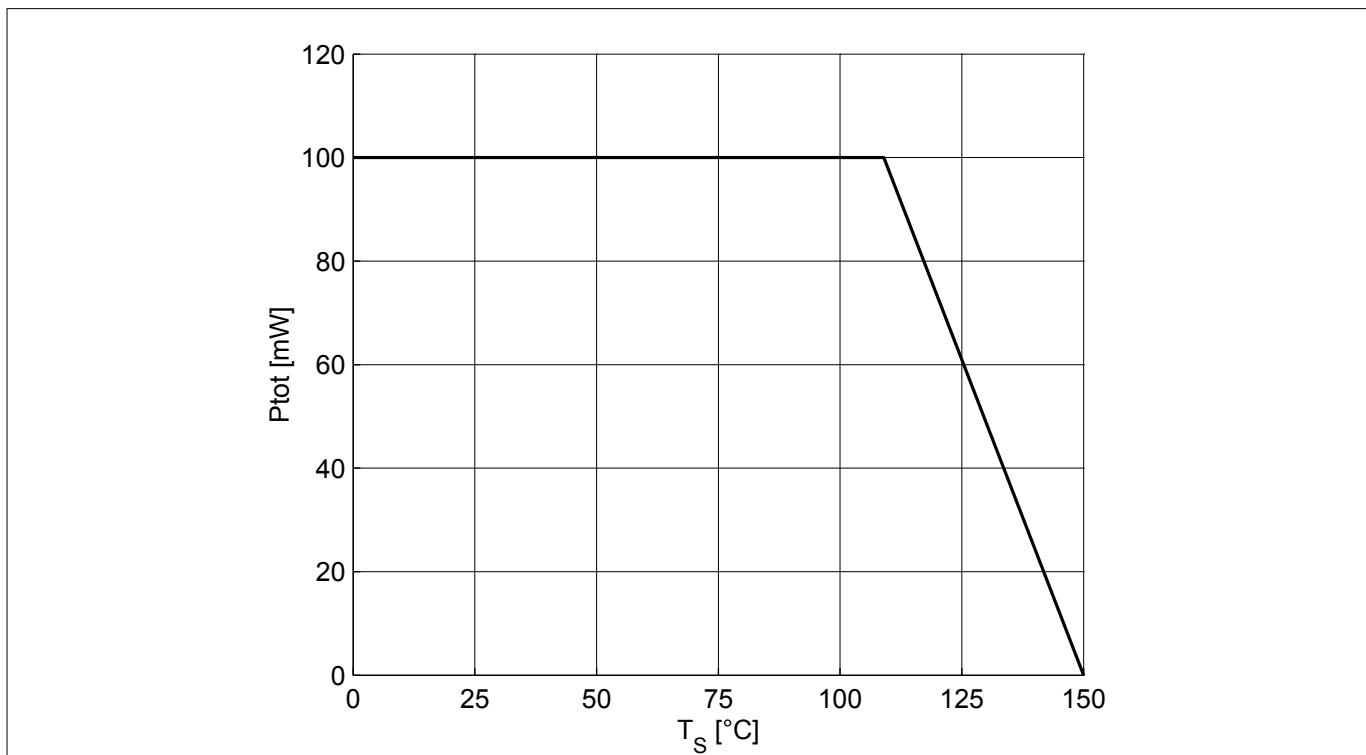


Figure 1 Total power dissipation $P_{tot} = f(T_S)$

Electrical characteristics

3 Electrical characteristics

3.1 DC characteristics

Table 4 DC characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(\text{BR})\text{CEO}}$	4.2	4.7	-	V	$I_C = 1 \text{ mA}, I_B = 0,$ open base
Collector emitter leakage current	I_{CES}	-	-	400 ¹⁾	nA	$V_{\text{CE}} = 2 \text{ V}, V_{\text{BE}} = 0,$ E-B short circuited
Collector base leakage current	I_{CBO}			400 ¹⁾		$V_{\text{CB}} = 2 \text{ V}, I_E = 0,$ open emitter
Emitter base leakage current	I_{EBO}			10 ¹⁾	μA	$V_{\text{EB}} = 0.5 \text{ V}, I_C = 0,$ open collector
DC current gain	h_{FE}			400		$V_{\text{CE}} = 3 \text{ V}, I_C = 15 \text{ mA},$ pulse measured

3.2 General AC characteristics

Table 5 General AC characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Transition frequency	f_T	-	45	-	GHz	$V_{\text{CE}} = 3 \text{ V}, I_C = 15 \text{ mA},$ $f = 1 \text{ GHz}$
Collector base capacitance	C_{CB}		0.05		pF	$V_{\text{CB}} = 3 \text{ V}, V_{\text{BE}} = 0,$ $f = 1 \text{ MHz},$ emitter grounded
Collector emitter capacitance	C_{CE}		0.35			$V_{\text{CE}} = 3 \text{ V}, V_{\text{BE}} = 0,$ $f = 1 \text{ MHz},$ base grounded
Emitter base capacitance	C_{EB}		0.4			$V_{\text{EB}} = 0.4 \text{ V}, V_{\text{CB}} = 0,$ $f = 1 \text{ MHz},$ collector grounded

¹ Maximum values not limited by the device but by the short cycle time of the 100% test.

Electrical characteristics

3.3 Frequency dependent AC characteristics

Measurement setup is a test fixture with Bias-T's in a $50\ \Omega$ system, $T_A = 25\text{ }^\circ\text{C}$.

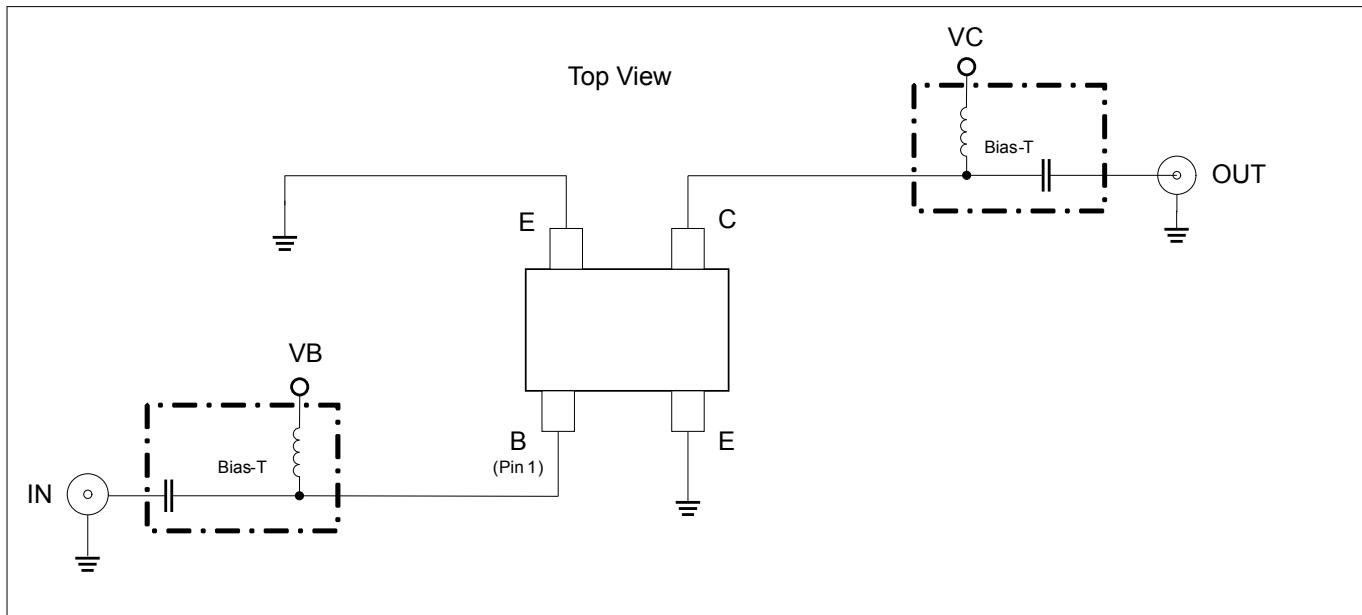


Figure 2 Testing circuit

Table 6 AC characteristics, $V_{CE} = 3\text{ V}$, $f = 150\text{ MHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	–	38.5	–	dB	$I_C = 15\text{ mA}$
• Transducer gain	$ S_{21} ^2$		30.5			
Noise figure						
• Minimum noise figure	NF_{min}	–	0.5	–	dB	$I_C = 5\text{ mA}$
• Associated gain	G_{ass}		29			
Linearity						
• 3rd order intercept point at output	OIP_3	–	21.5	–	dBm	$Z_S = Z_L = 50\ \Omega$
• 1 dB gain compression point at output	OP_{1dB}		6			$I_C = 15\text{ mA}$

Electrical characteristics

Table 7 AC characteristics, $V_{CE} = 3$ V, $f = 450$ MHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	-	33.5	-	dB	$I_C = 15$ mA
• Transducer gain	$ S_{21} ^2$		30			
Noise figure						
• Minimum noise figure	NF_{min}	-	0.5	-	dB	$I_C = 5$ mA
• Associated gain	G_{ass}		27.5			
Linearity						
• 3rd order intercept point at output	OIP_3	-	21.5	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	OP_{1dB}		6			$I_C = 15$ mA

Table 8 AC characteristics, $V_{CE} = 3$ V, $f = 900$ MHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	-	30.5	-	dB	$I_C = 15$ mA
• Transducer gain	$ S_{21} ^2$		28.5			
Noise figure						
• Minimum noise figure	NF_{min}	-	0.55	-	dB	$I_C = 5$ mA
• Associated gain	G_{ass}		25.5			
Linearity						
• 3rd order intercept point at output	OIP_3	-	22	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	OP_{1dB}		6.5			$I_C = 15$ mA

Table 9 AC characteristics, $V_{CE} = 3$ V, $f = 1.5$ GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	-	28	-	dB	$I_C = 15$ mA
• Transducer gain	$ S_{21} ^2$		26			
Noise figure						
• Minimum noise figure	NF_{min}	-	0.55	-	dB	$I_C = 5$ mA
• Associated gain	G_{ass}		23.5			
Linearity						
• 3rd order intercept point at output	OIP_3	-	22	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	OP_{1dB}		7			$I_C = 15$ mA

Electrical characteristics

Table 10 AC characteristics, $V_{CE} = 3$ V, $f = 1.9$ GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	-	27	-	dB	$I_C = 15$ mA
• Transducer gain	$ S_{21} ^2$		25			
Noise figure						
• Minimum noise figure	NF_{min}	-	0.55	-	dB	$I_C = 5$ mA
• Associated gain	G_{ass}		22.5			
Linearity						
• 3rd order intercept point at output	OIP_3	-	22	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	OP_{1dB}		7			$I_C = 15$ mA

Table 11 AC characteristics, $V_{CE} = 3$ V, $f = 2.4$ GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	-	26	-	dB	$I_C = 15$ mA
• Transducer gain	$ S_{21} ^2$		23.5			
Noise figure						
• Minimum noise figure	NF_{min}	-	0.6	-	dB	$I_C = 5$ mA
• Associated gain	G_{ass}		21			
Linearity						
• 3rd order intercept point at output	OIP_3	-	22	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	OP_{1dB}		7			$I_C = 15$ mA

Table 12 AC characteristics, $V_{CE} = 3$ V, $f = 3.5$ GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	-	24.5	-	dB	$I_C = 15$ mA
• Transducer gain	$ S_{21} ^2$		20.5			
Noise figure						
• Minimum noise figure	NF_{min}	-	0.65	-	dB	$I_C = 5$ mA
• Associated gain	G_{ass}		19			
Linearity						
• 3rd order intercept point at output	OIP_3	-	21.5	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	OP_{1dB}		7			$I_C = 15$ mA

Electrical characteristics

Table 13 AC characteristics, $V_{CE} = 3 \text{ V}$, $f = 5.5 \text{ GHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ms}	-	22	-	dB	$I_C = 15 \text{ mA}$
• Transducer gain	$ S_{21} ^2$		17			
Noise figure						
• Minimum noise figure	NF_{min}	-	0.8	-	dB	$I_C = 5 \text{ mA}$
• Associated gain	G_{ass}		16			
Linearity						
• 3rd order intercept point at output	OIP_3	-	21	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	$OP_{1\text{dB}}$		7			$I_C = 15 \text{ mA}$

Table 14 AC characteristics, $V_{CE} = 3 \text{ V}$, $f = 10 \text{ GHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
• Maximum power gain	G_{ma}	-	15	-	dB	$I_C = 15 \text{ mA}$
• Transducer gain	$ S_{21} ^2$		11			
Noise figure						
• Minimum noise figure	NF_{min}	-	1.3	-	dB	$I_C = 5 \text{ mA}$
• Associated gain	G_{ass}		10			
Linearity						
• 3rd order intercept point at output	OIP_3	-	20	-	dBm	$Z_S = Z_L = 50 \Omega$
• 1 dB gain compression point at output	$OP_{1\text{dB}}$		6			$I_C = 15 \text{ mA}$

Note: $G_{ms} = |S_{21}| / S_{12}| I$ for $k < 1$; $G_{ma} = |S_{21}| / S_{12}| I / (k - (k^2 - 1)^{1/2})$ for $k > 1$. In order to get the NF_{min} values stated in this chapter the test fixture losses have been subtracted from all measured results. OIP_3 value depends on termination of all intermodulation frequency components. Termination used for this measurement is 50Ω from 0.2 MHz to 12 GHz .

Electrical characteristics

3.4

Characteristic DC diagrams

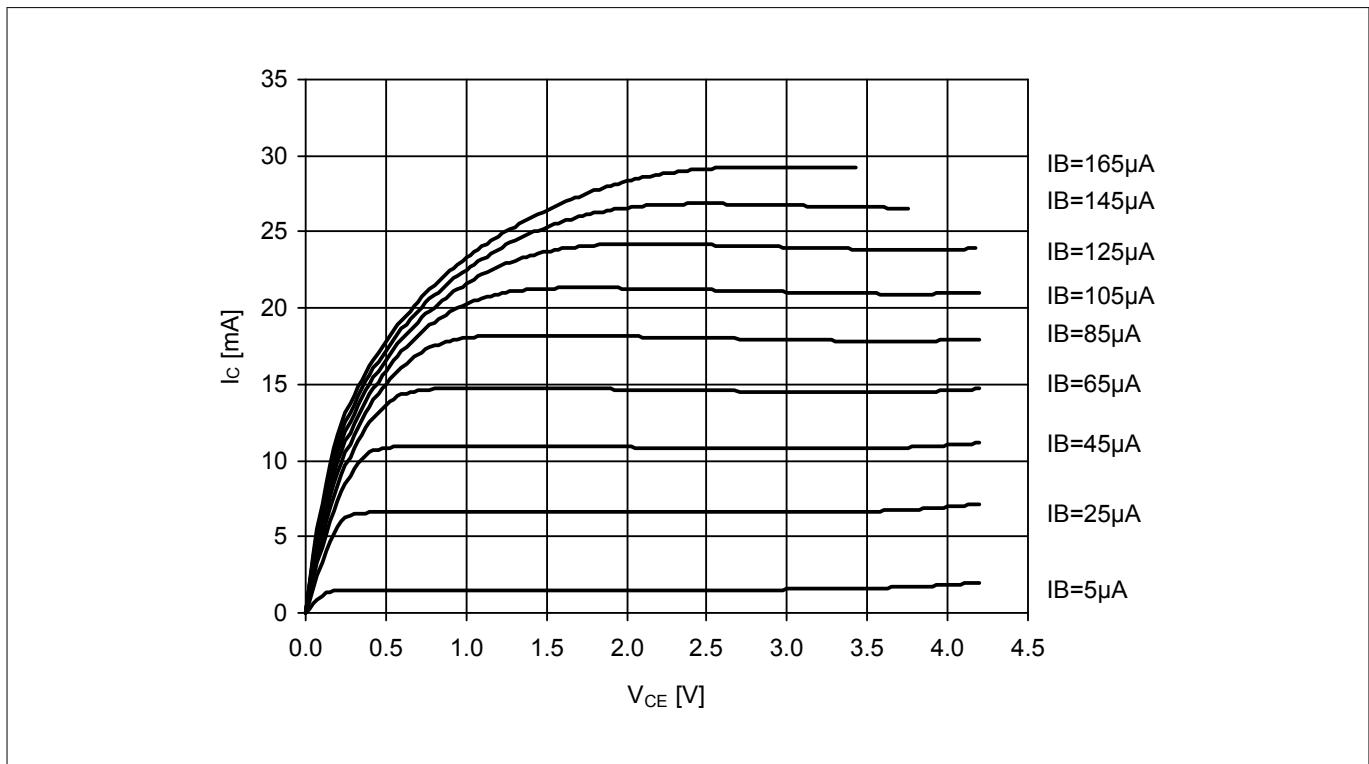


Figure 3 Collector current vs. collector emitter voltage $I_C = f(V_{CE})$, I_B = parameter

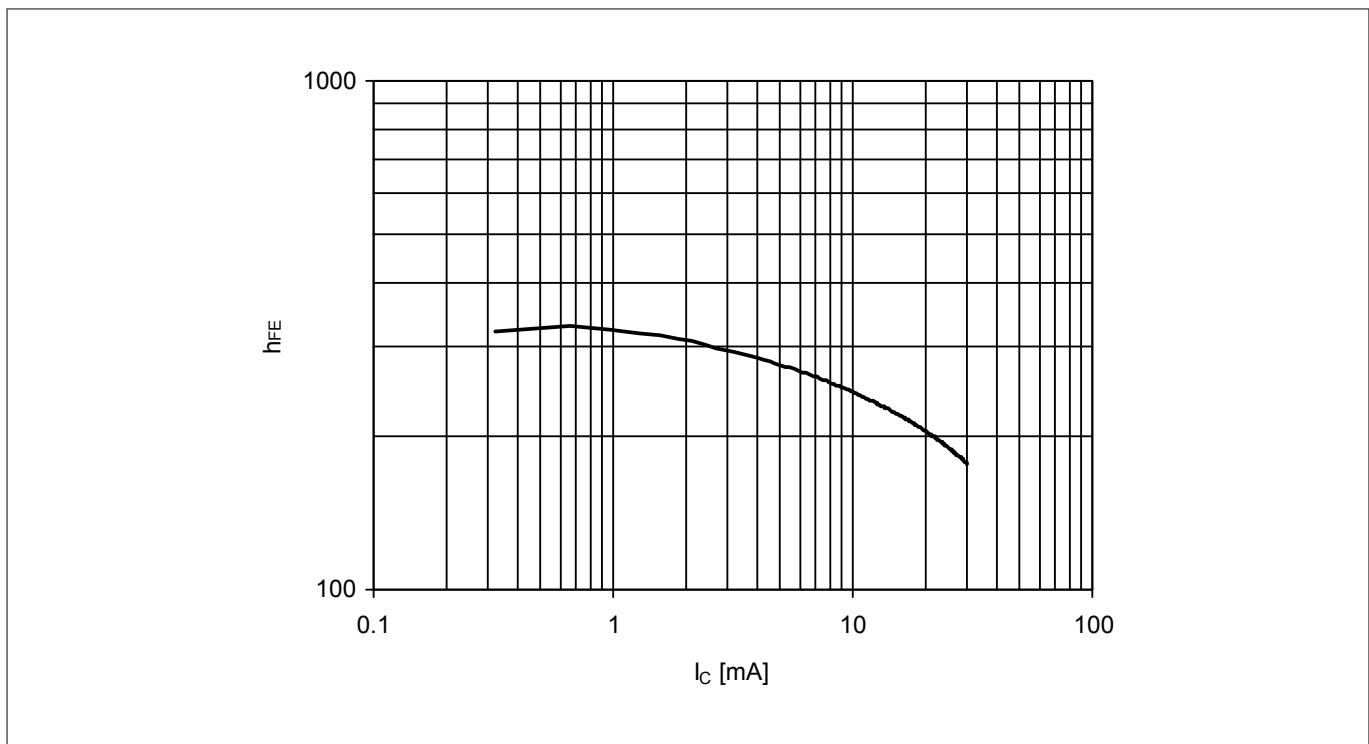


Figure 4 DC current gain $h_{FE} = f(I_C)$, $V_{CE} = 3$ V

Electrical characteristics

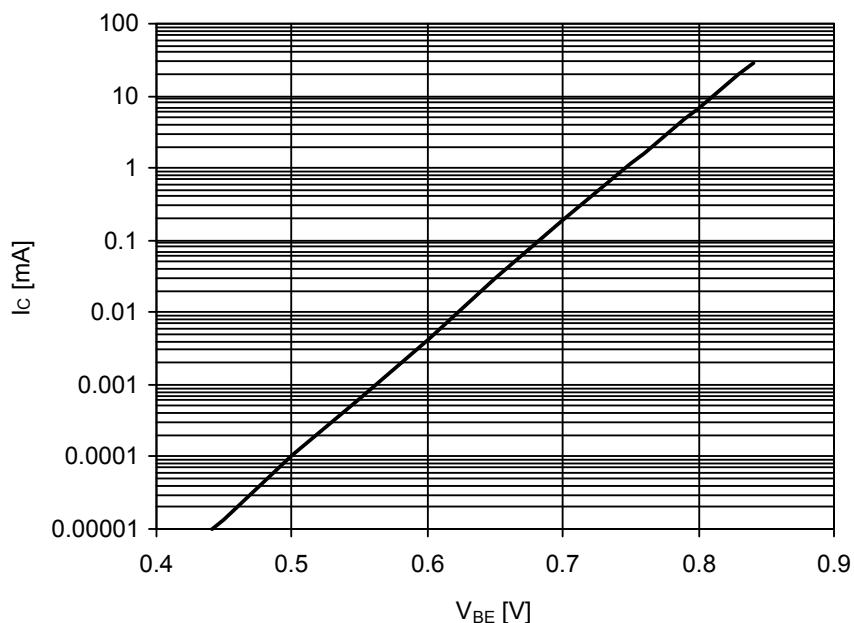


Figure 5 **Collector current vs. base emitter voltage** $I_C = f(V_{BE})$, $V_{CE} = 2\text{ V}$

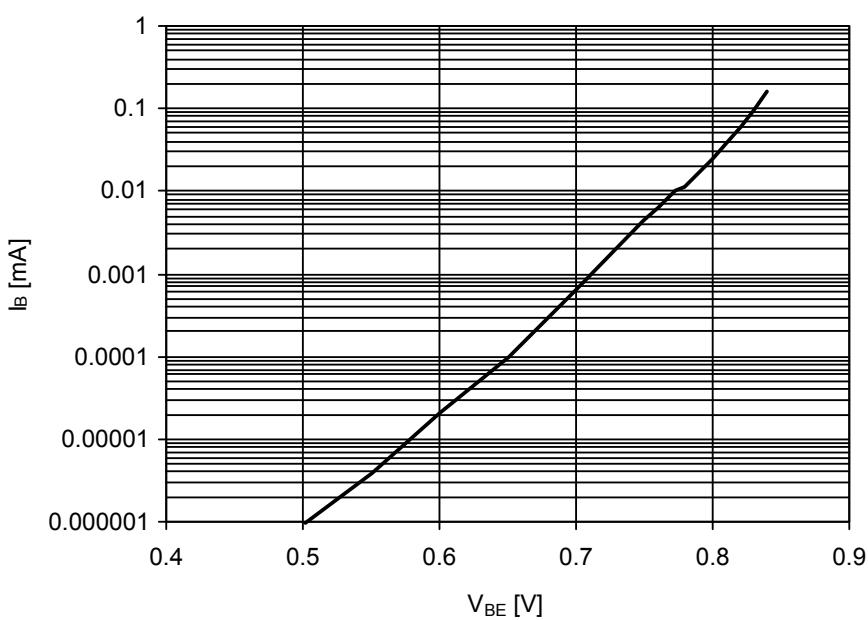


Figure 6 **Base current vs. base emitter forward voltage** $I_B = f(V_{BE})$, $V_{CE} = 2\text{ V}$

Electrical characteristics

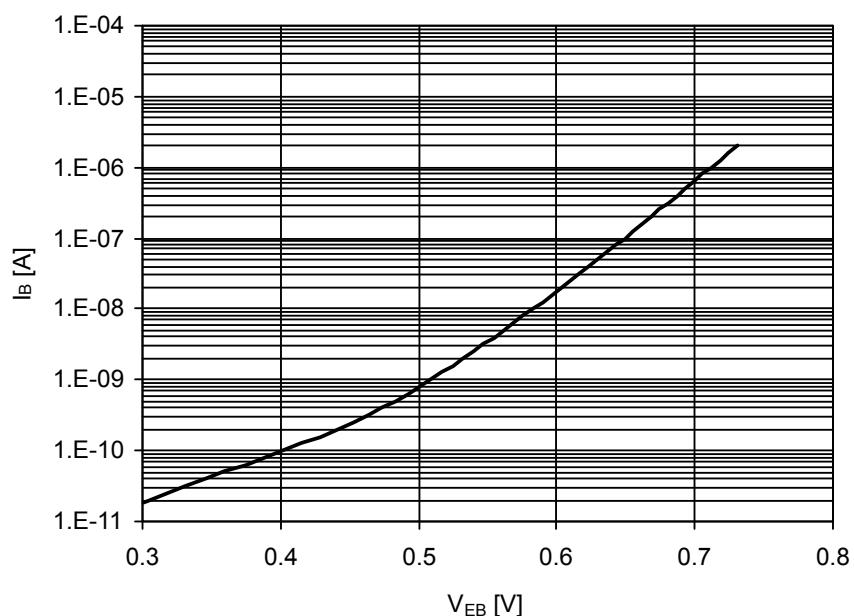


Figure 7 **Base current vs. base emitter reverse voltage $I_B = f(V_{EB})$, $V_{CE} = 2\text{ V}$**

Electrical characteristics

3.5

Characteristic AC diagrams

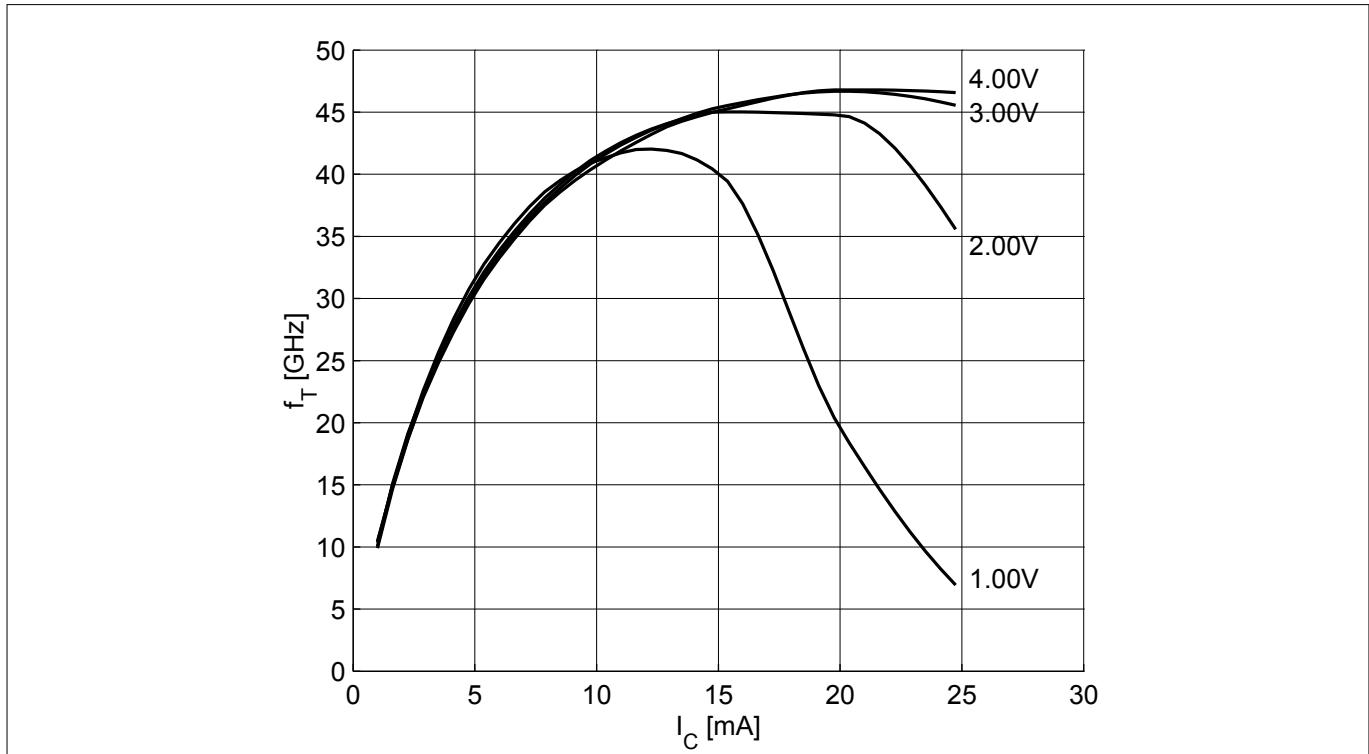


Figure 8 Transition frequency $f_T = f(I_C)$, $f = 1 \text{ GHz}$, $V_{CE} = \text{parameter}$

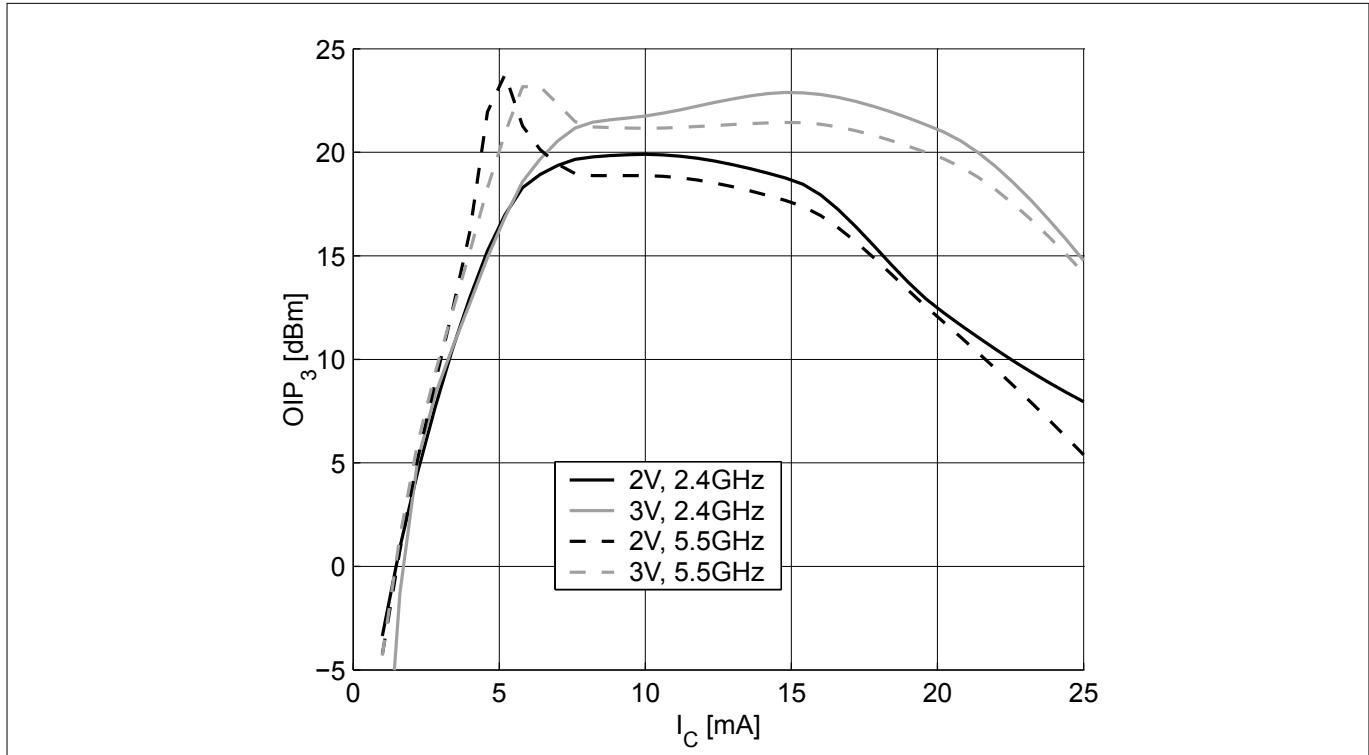


Figure 9 3rd order intercept point $OIP_3 = f(I_C)$, $Z_S = Z_L = 50 \Omega$, V_{CE} , f = parameters

Electrical characteristics

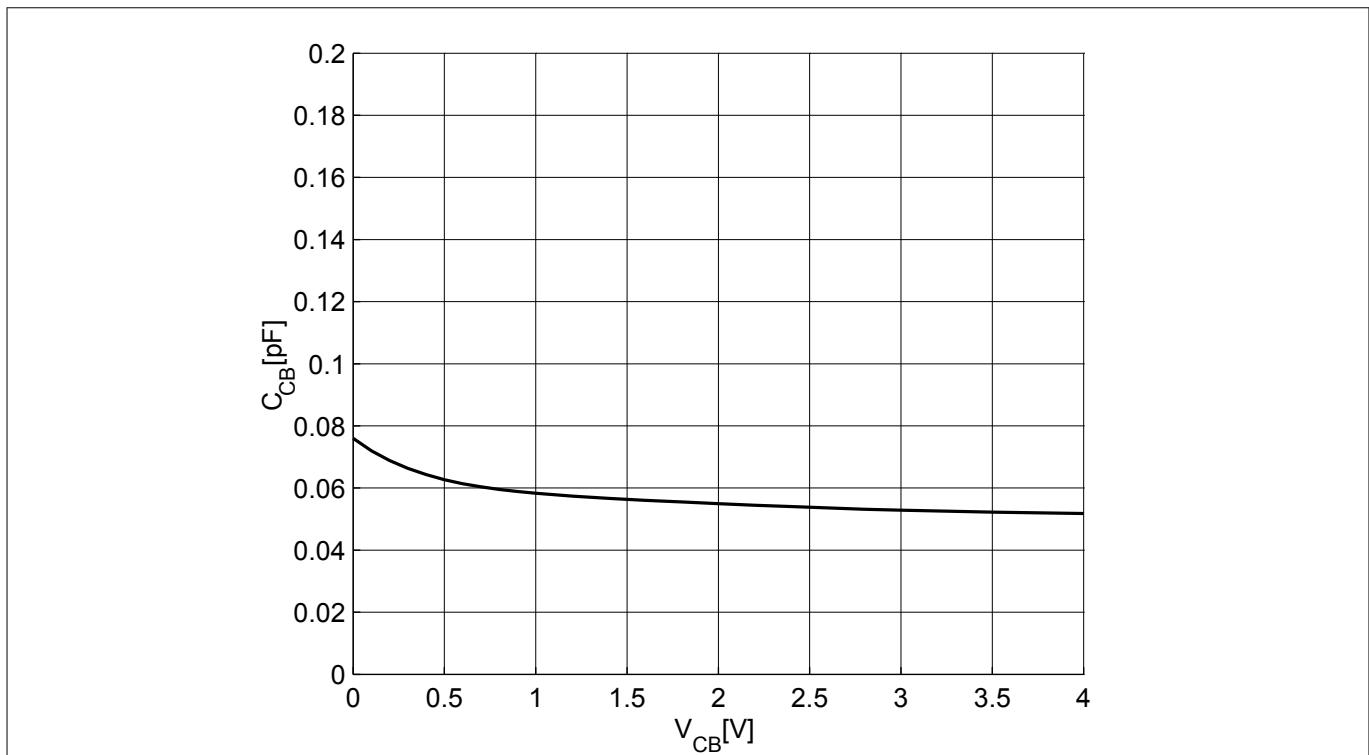


Figure 10 **Collector base capacitance $C_{CB} = f(V_{CB})$, $f = 1$ MHz**

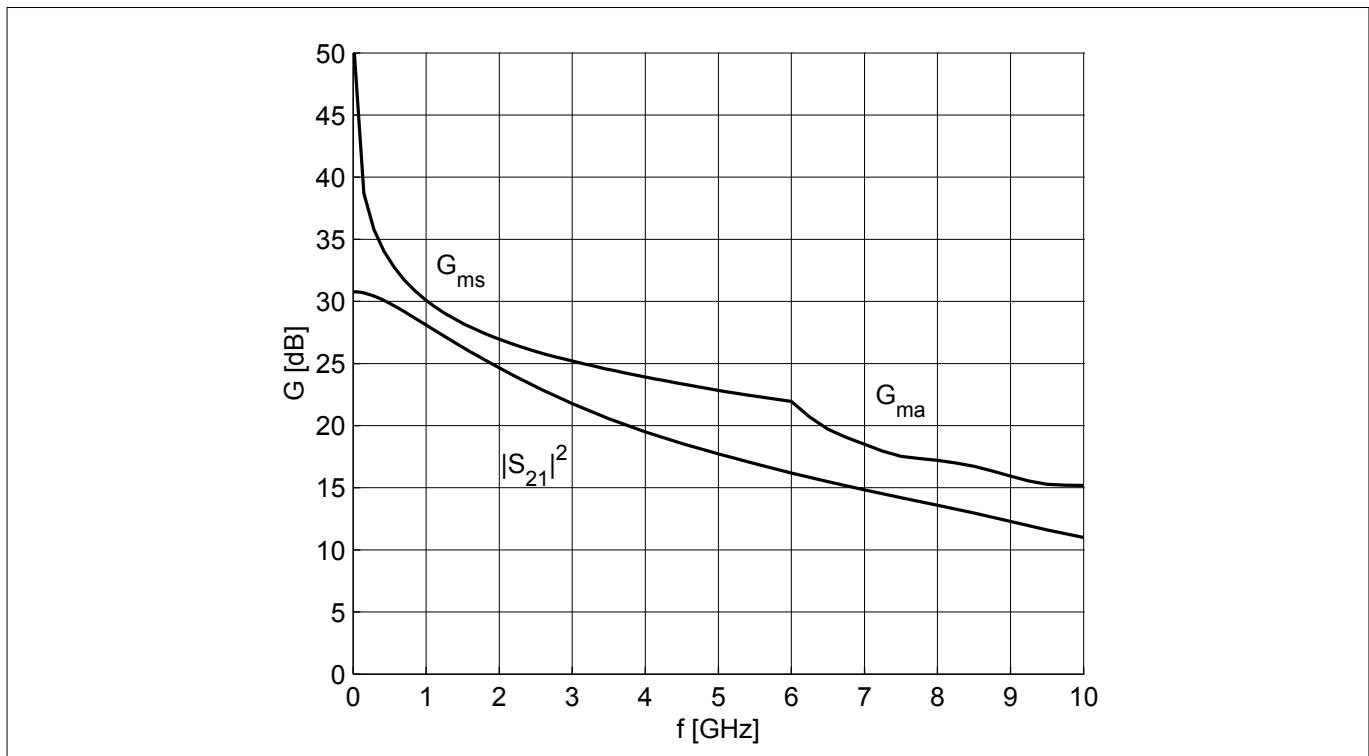


Figure 11 **Gain G_{ma} , G_{ms} , $|S_{21}|^2 = f(f)$, $V_{CE} = 3$ V, $I_C = 15$ mA**

Electrical characteristics

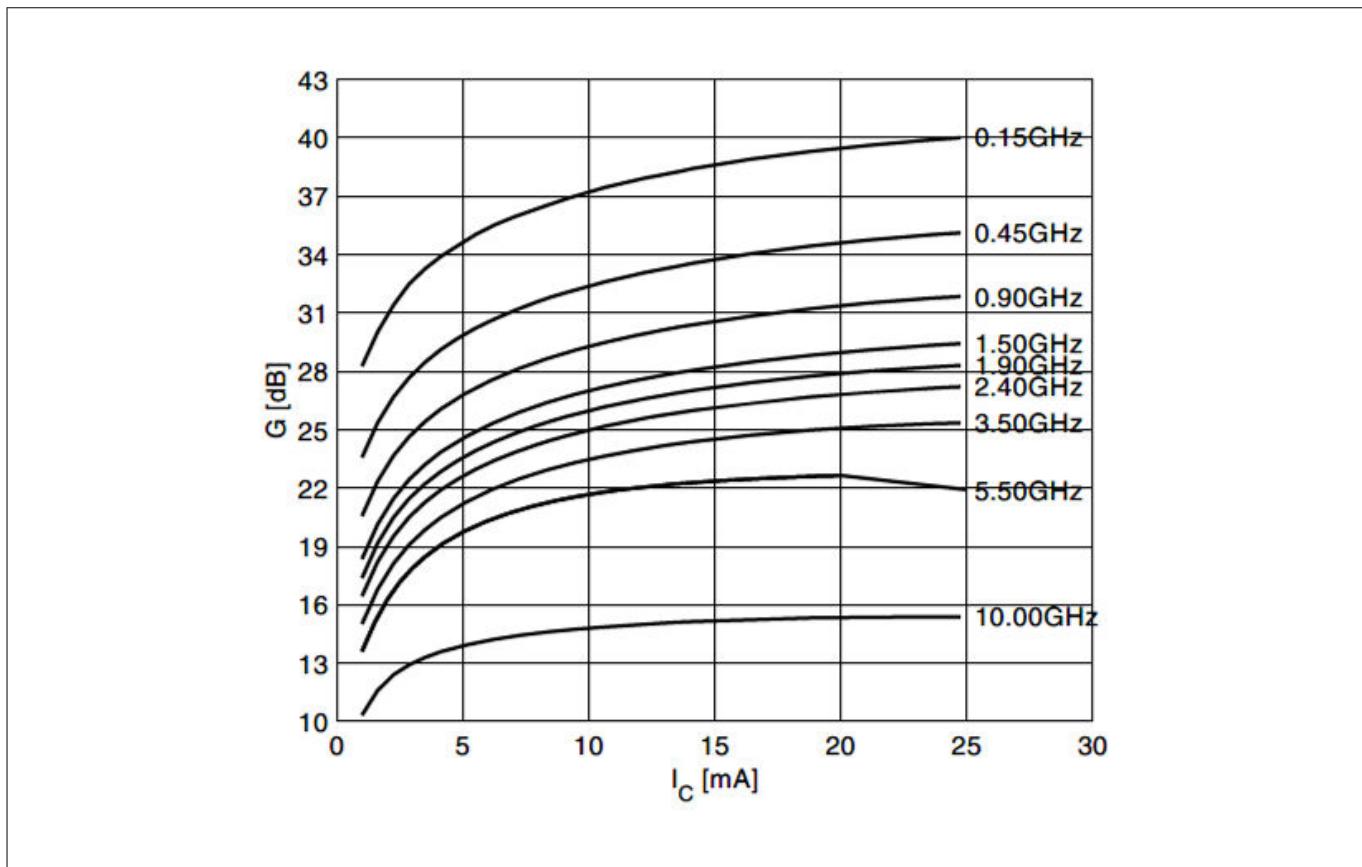


Figure 12 Maximum power gain $G_{\max} = f(I_C)$, $V_{CE} = 3$ V, f = parameter in GHz

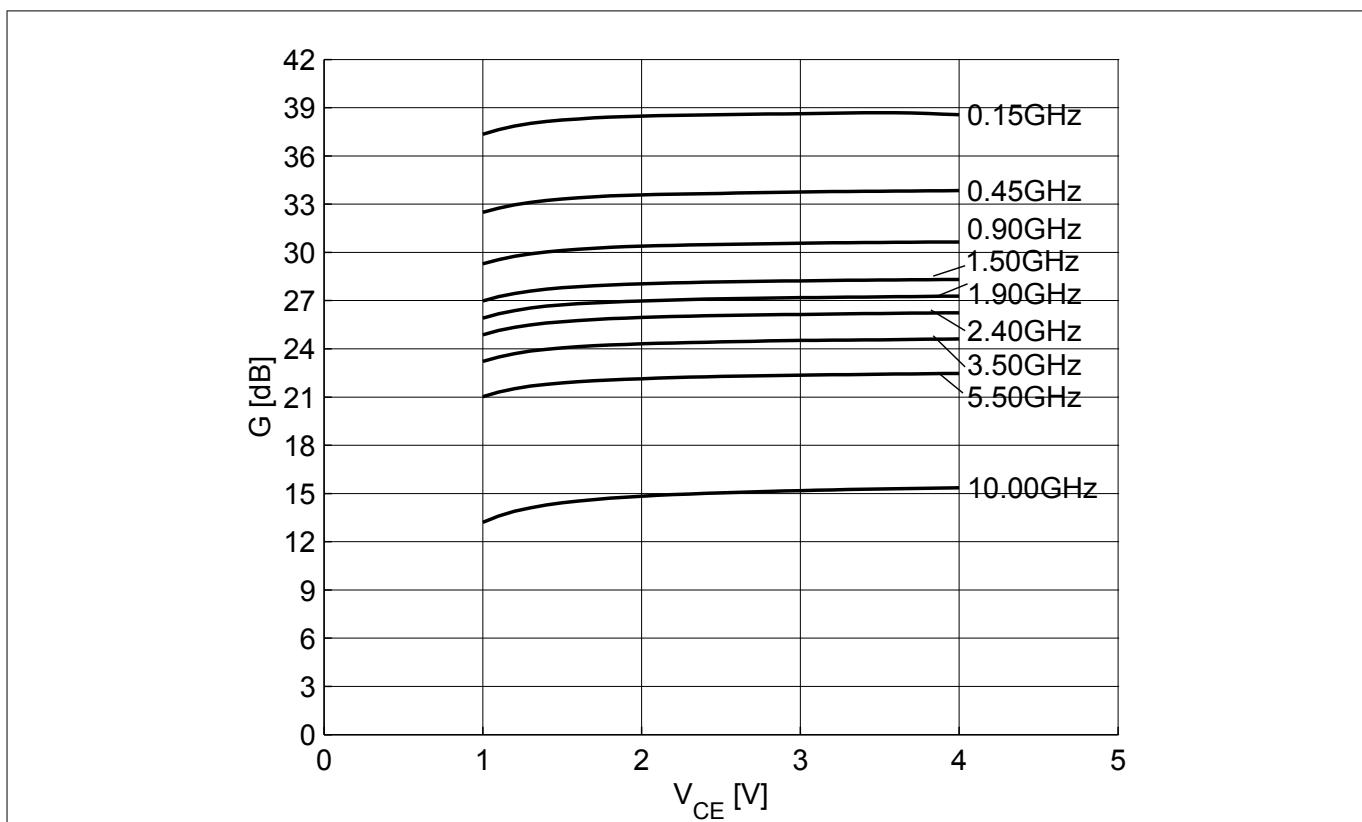


Figure 13 Maximum power gain $G_{\max} = f(V_{CE})$, $I_C = 15$ mA, f = parameter in GHz

Electrical characteristics

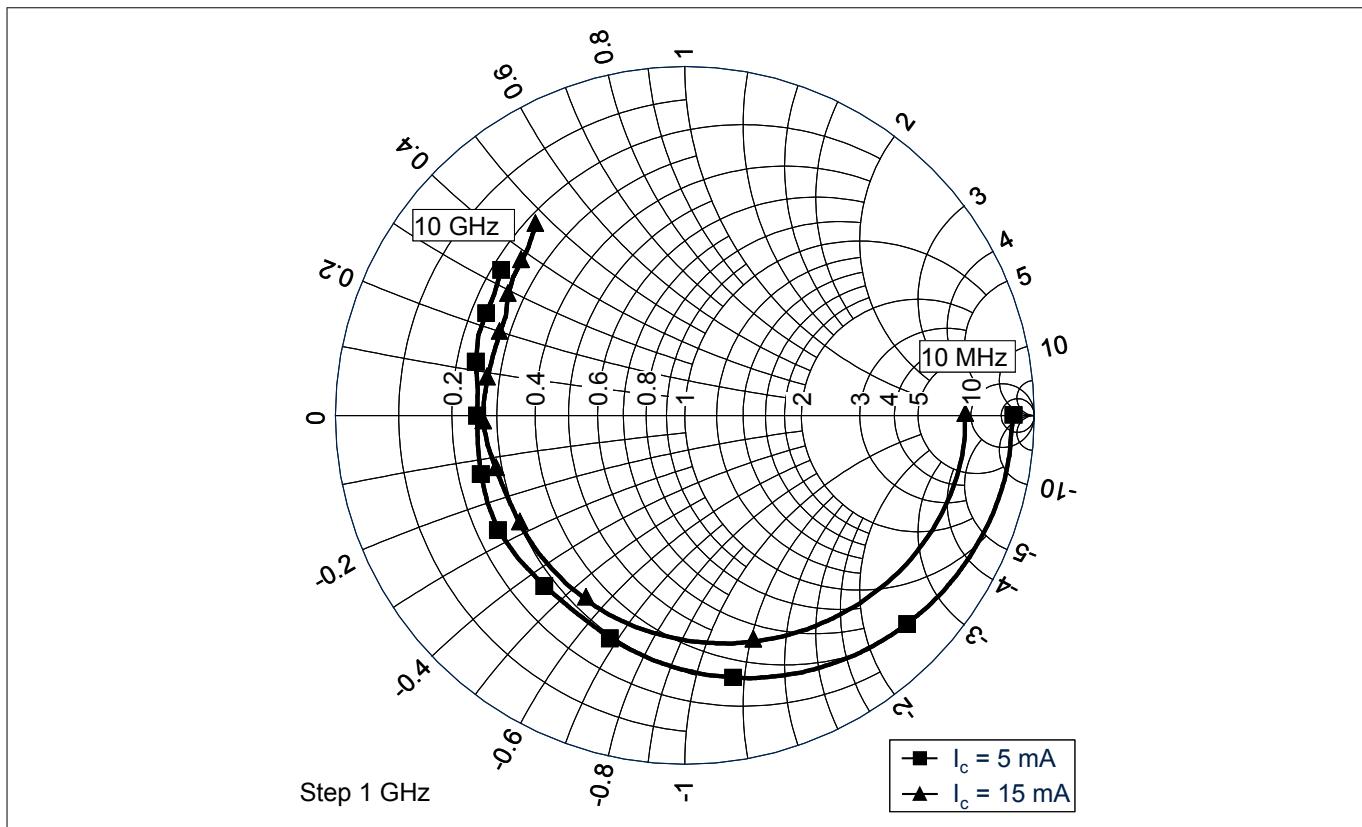


Figure 14 **Input reflection coefficient $S_{11} = f(f)$, $V_{CE} = 3 \text{ V}$, $I_C = 5 / 15 \text{ mA}$**

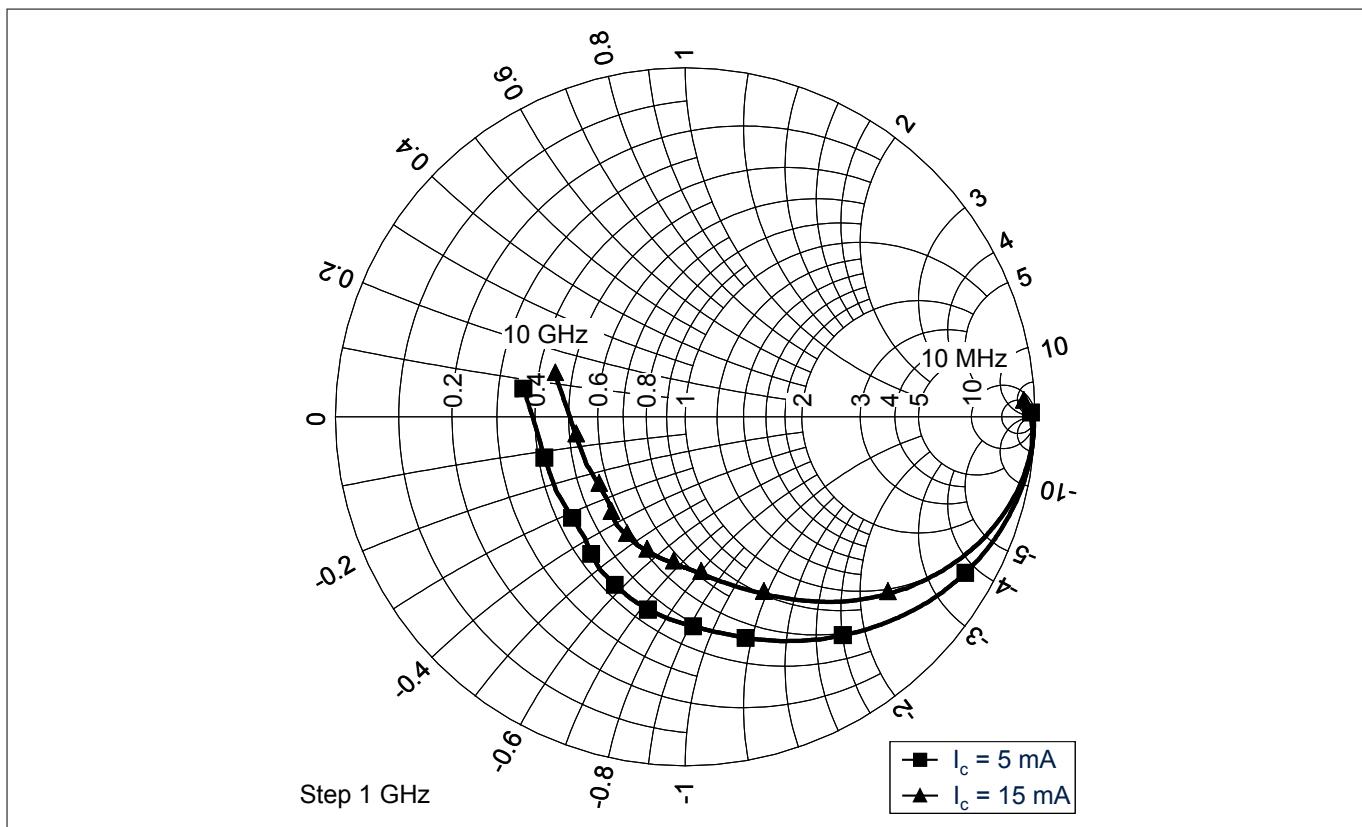


Figure 15 **Output reflection coefficient $S_{22} = f(f)$, $V_{CE} = 3 \text{ V}$, $I_C = 5 / 15 \text{ mA}$**

Electrical characteristics

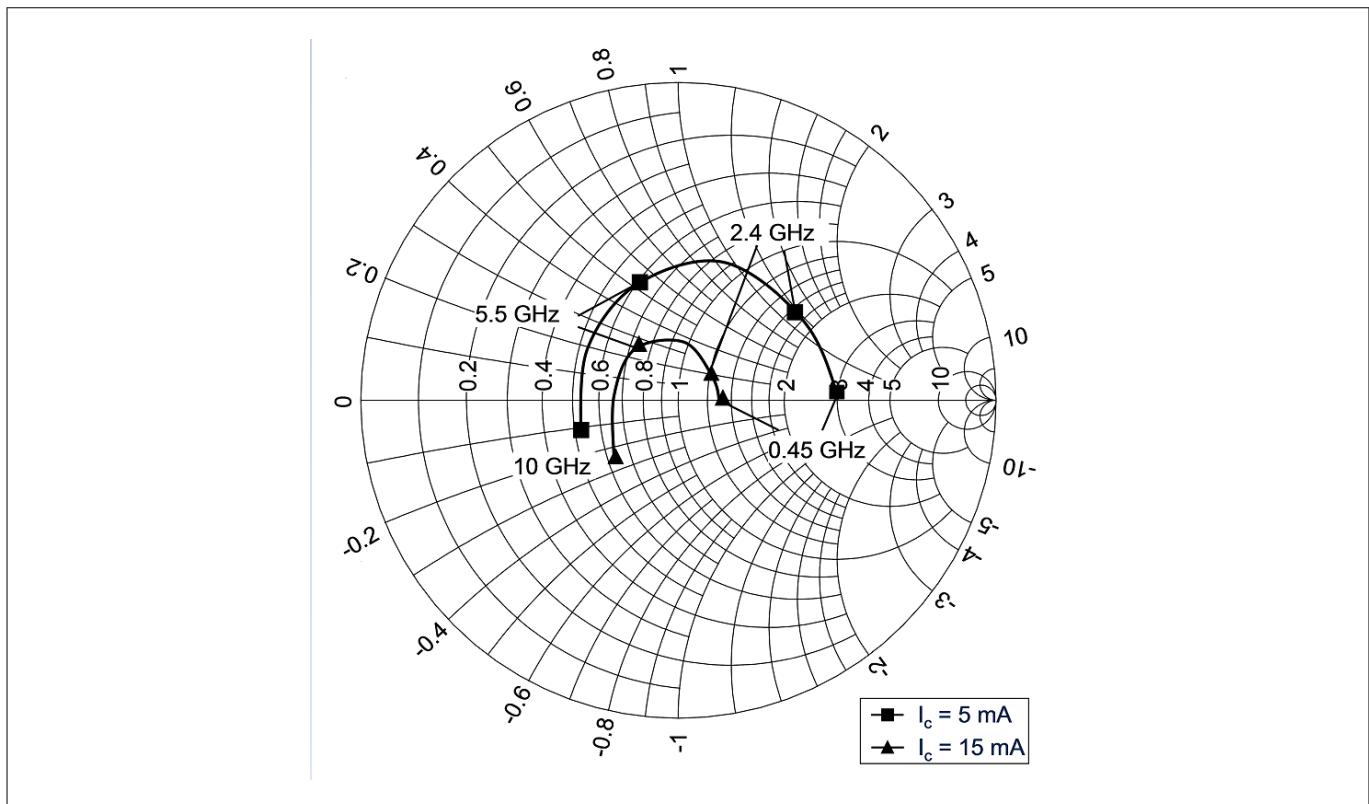


Figure 16 Source impedance for minimum noise figure $Z_{S,\text{opt}} = f(f)$, $V_{CE} = 3 \text{ V}$, $I_C = 5 / 15 \text{ mA}$

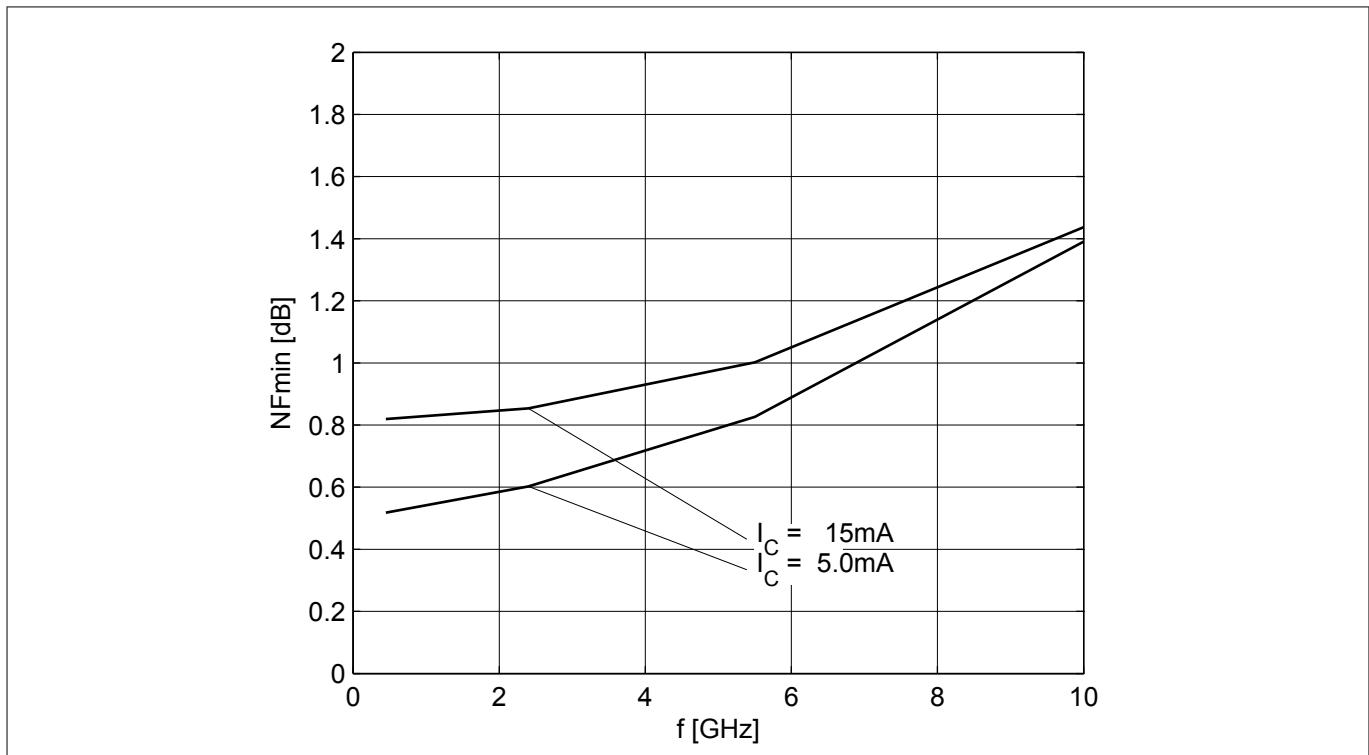


Figure 17 Noise figure $NF_{\text{min}} = f(f)$, $V_{CE} = 3 \text{ V}$, $Z_S = Z_{S,\text{opt}}$, $I_C = 5 / 15 \text{ mA}$

Electrical characteristics

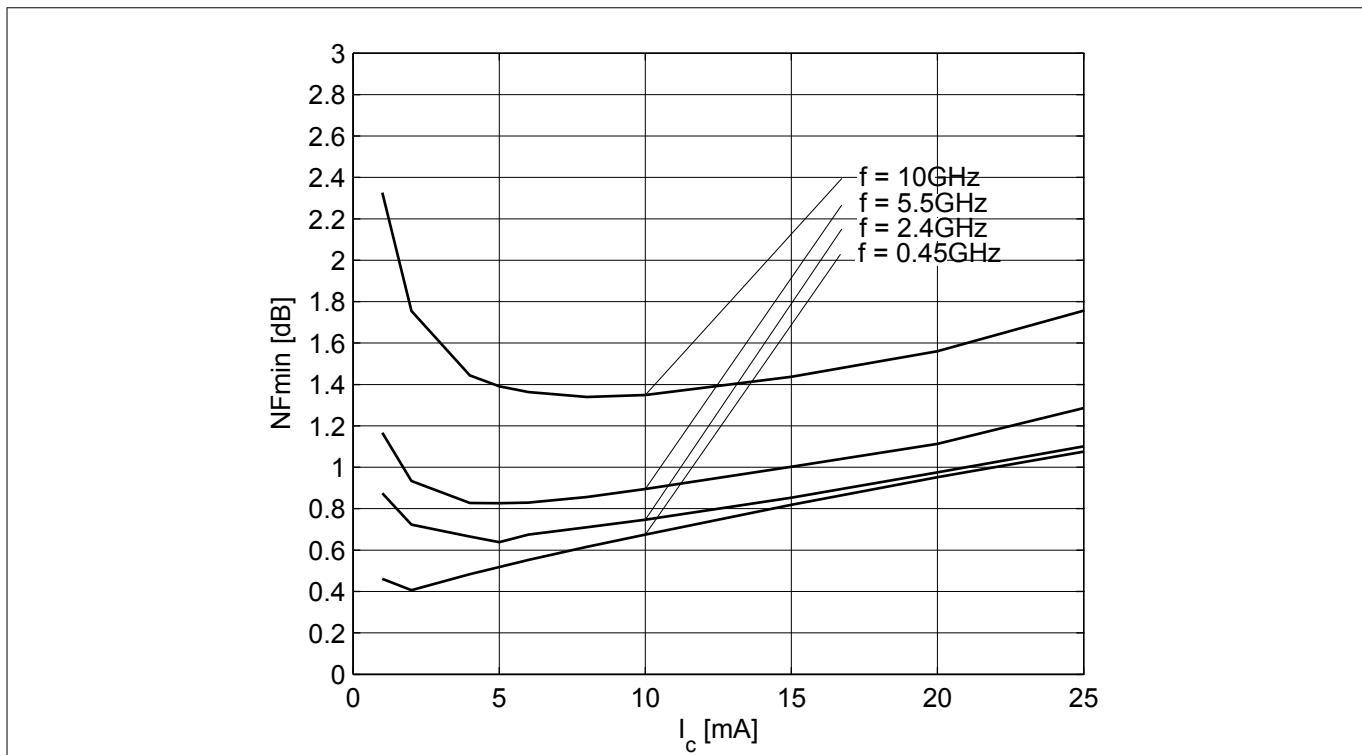


Figure 18 Noise figure $NF_{min} = f(I_c)$, $V_{CE} = 3 \text{ V}$, $Z_S = Z_{S,opt}$, $f = \text{parameter in GHz}$

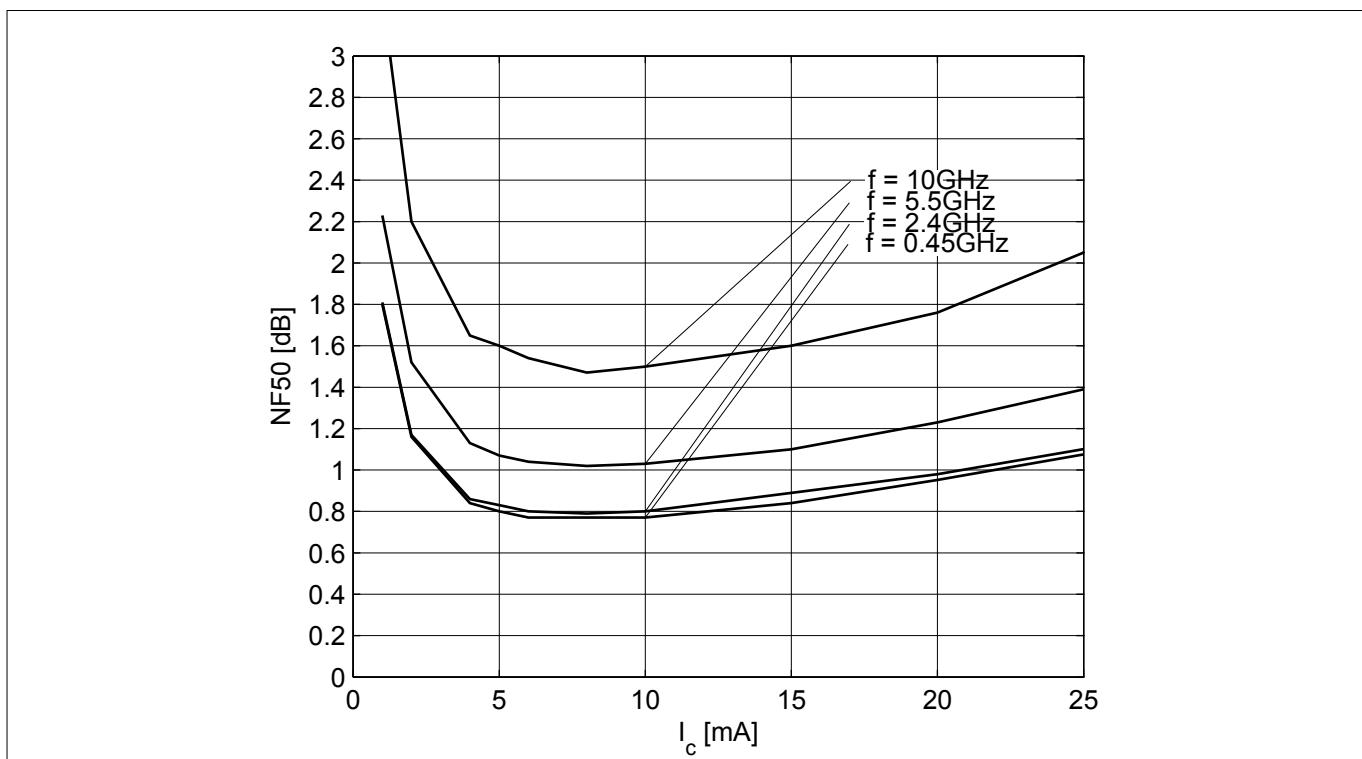


Figure 19 Noise figure $NF_{50} = f(I_c)$, $V_{CE} = 3 \text{ V}$, $Z_S = 50 \Omega$, $f = \text{parameter in GHz}$

Note: The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves. $T_A = 25^\circ\text{C}$.

Package information TSFP-4-1

4 Package information TSFP-4-1

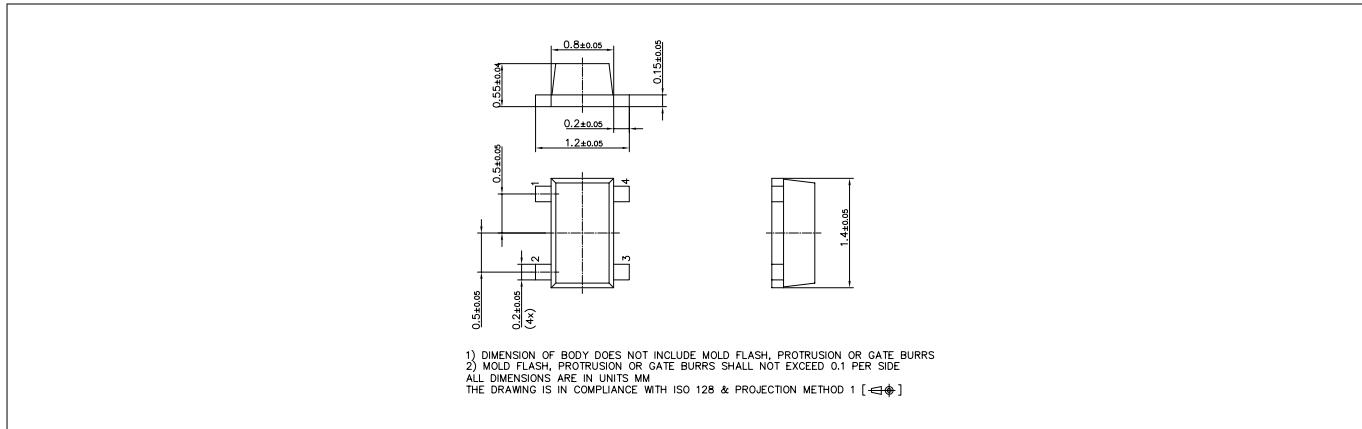


Figure 20 Package outline

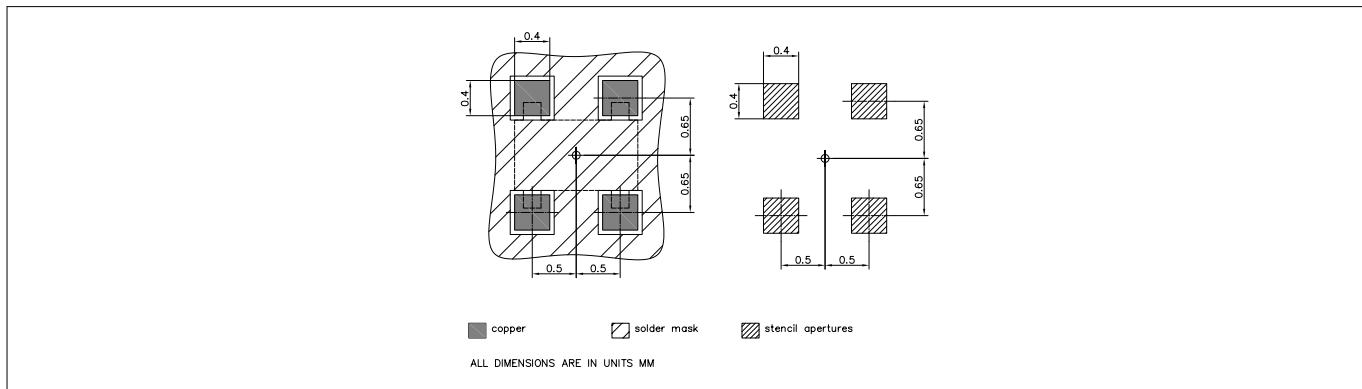


Figure 21 Foot print

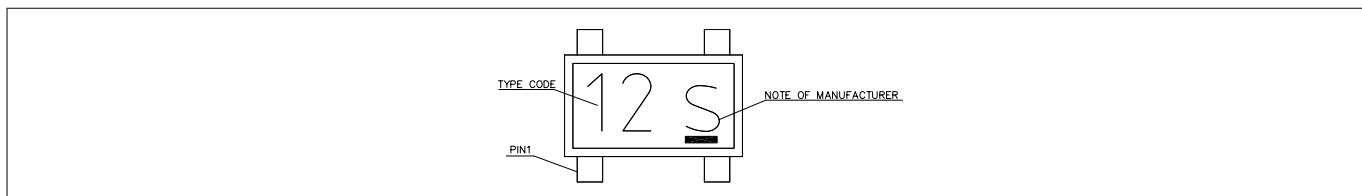


Figure 22 Marking layout example

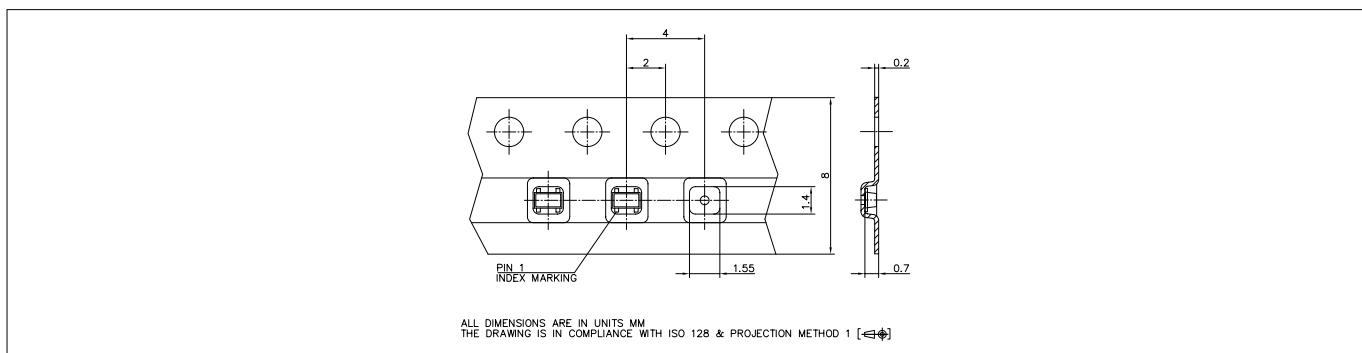


Figure 23 Tape dimensions

Revision history

Revision history

Document version	Date of release	Description of changes
2.0	2018-09-26	New datasheet layout.

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2018-09-26

Published by

**Infineon Technologies AG
81726 Munich, Germany**

**© 2018 Infineon Technologies AG
All Rights Reserved.**

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

**Document reference
IFX-pes1518081453226**

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury