



TPS22965 5.7V, 6A, 16mΩ 导通电阻负载开关


1 特性

- 集成单通道负载开关
- 输入电压范围：0.8V 至 5.7V
- 超低导通电阻 (R_{ON})
 - $V_{输入} = 5V$ ($V_{偏置} = 5V$) 时, $R_{导通} = 16m\Omega$
 - $V_{输入} = 3.6V$ ($V_{偏置} = 5V$) 时, $R_{导通} = 16m\Omega$
 - $V_{输入} = 1.8V$ ($V_{偏置} = 5V$) 时, $R_{导通} = 16m\Omega$
- 6A 最大持续开关电流
- 低静态电流 (50μA)
- 低控制输入阈值支持使用 1.2V, 1.8V, 2.5V 和 3.3V 逻辑电路
- 可配置的上升时间
- 快速输出放电 (QOD)
- 带有散热垫的小外形尺寸无引线 (SON) 8 引脚封装
- 根据 JESD 22 测试得出的静电放电 (ESD) 性能
 - 2000V 人体模型 (HBM) 和 1000V 充电器件模型 (CDM)

2 应用范围

- Ultrabook™
- 笔记本电脑/上网本
- 平板电脑
- 消费类电子产品
- 机顶盒/家庭网关
- 电信系统
- 固态硬盘 (SSD)

4 简化电路原理图

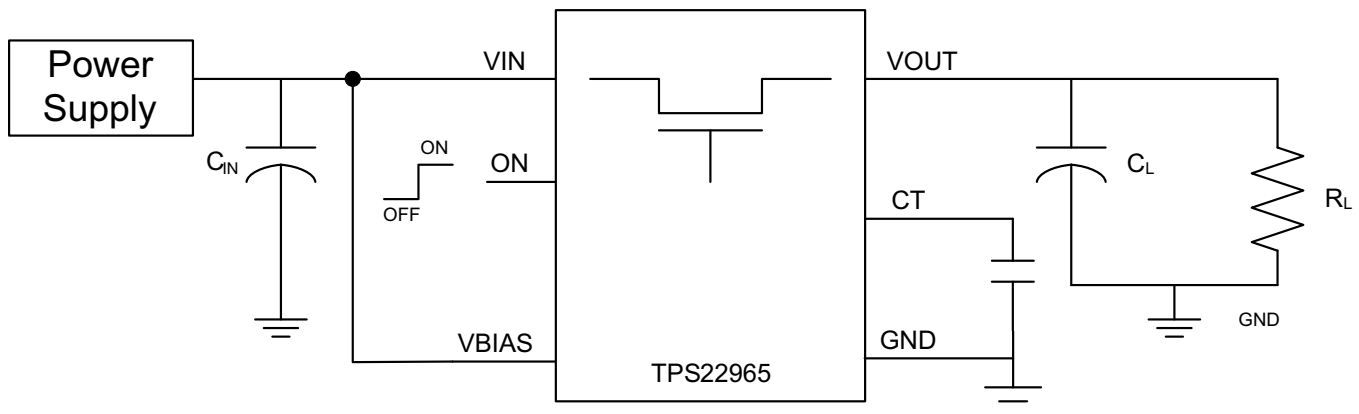

3 说明

TPS22965 是一款单通道负载开关, 可提供可配置的上升时间来尽量减小浪涌电流。此器件包括一个 N 通道金属氧化物半导体场效应晶体管 (MOSFET), 可在 0.8V 至 5.7V 的输入电压范围内运行并可支持 6A 的最大持续电流。此开关由一个开/关输入 (ON) 控制, 此输入能够直接连接低电压控制信号。在 TPS22965 中, 为了实现开关关闭时的快速输出放电, 增加了一个 225Ω 的片上负载电阻器。

TPS22965 采用小型, 节省空间的 2.00mm x 2.00mm 8 引脚 SON 封装 (DSG), 且带有集成散热焊盘, 支持较高功耗。器件在自然通风环境下的额定运行温度范围为 -40°C 至 85°C。

器件信息⁽¹⁾

部件号	封装	封装尺寸 (标称值)
TPS22965	DSG (8)	2.00mm x 2.00mm

(1) 要了解所有可用封装, 请见数据表末尾的可订购产品附录。



目录


1	特性	1	8.1	Overview	14
2	应用范围	1	8.2	Functional Block Diagram	14
3	说明	1	8.3	Feature Description	15
4	简化电路原理图	1	8.4	Device Functional Modes	15
5	修订历史记录	2	9	Application and Implementation	16
6	Pin Configuration and Functions	3	9.1	Application Information	16
7	Specifications	3	9.2	Typical Application	17
7.1	Absolute Maximum Ratings	3	10	Power Supply Recommendations	19
7.2	Handling Ratings	4	11	Layout	19
7.3	Recommended Operating Conditions	4	11.1	Layout Guidelines	19
7.4	Thermal Information	4	11.2	Layout Example	19
7.5	Electrical Characteristics, $V_{BIAS} = 5.0\text{ V}$	5	11.3	Thermal Considerations	19
7.6	Electrical Characteristics, $V_{BIAS} = 2.5\text{ V}$	6	12	器件和文档支持	20
7.7	Switching Characteristics	7	12.1	商标	20
7.8	Typical Characteristics	8	12.2	静电放电警告	20
7.9	Typical Switching Characteristics	12	12.3	术语表	20
8	Detailed Description	14	13	机械封装和可订购信息	20

5 修订历史记录

Changes from Revision A (August 2013) to Revision B	Page
• 已更改 已将此数据表更改为新的模板布局。	1
• 添加了器件信息表。	1
• Added Handling Ratings table.	4
• Changed MAX value of " V_{IN} " from 5.5 V to 5.7 V.	4
• Changed MAX value of " V_{BIAS} " from 5.5 V to 5.7 V.	4
• Changed MAX value of " V_{ON} " from 5.5 V to 5.7 V.	4
• Added Thermal Information table.	4
• Added Detailed Description Section.	14
• Added Application and Implementation section.	16
• Added Power Supply Recommendations section.	19
• Added Layout section.	19

Changes from Original (August 2012) to Revision A	Page
• Updated VON MAX value to fix typo that restricted operating range. Changed MAX value from "VIN" to "5.5" to align with rest of document.	4

6 Pin Configuration and Functions

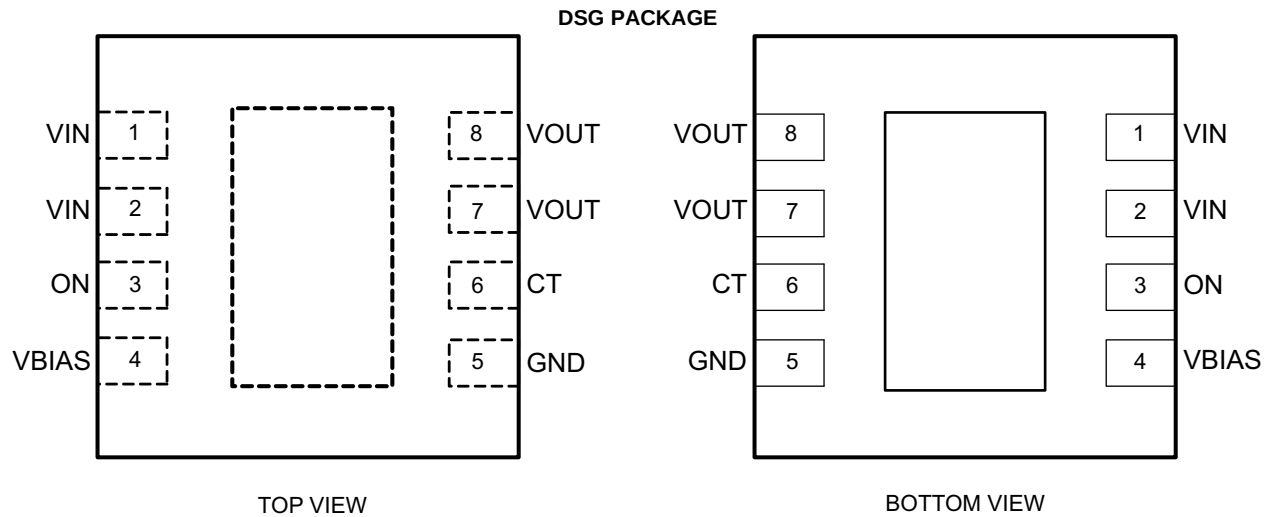

Pin Functions

PIN		I/O	DESCRIPTION
NAME	DSG		
CT	6	O	Switch slew rate control. Can be left floating. See Application Information section for more information.
GND	5	–	Device ground.
ON	3	I	Active high switch control input. Do not leave floating.
Thermal Pad	–	–	Thermal pad (exposed center pad) to alleviate thermal stress. Tie to GND. See Layout Example section for layout guidelines.
VBIAS	4	I	Bias voltage. Power supply to the device. Recommended voltage range for this pin is 2.5V to 5.7V. See Application and Implementation section for more information.
VIN	1, 2	I	Switch input. Input bypass capacitor recommended for minimizing V_{IN} dip. Must be connected to Pin 1 and Pin 2. See Application and Implementation section for more information.
VOUT	7, 8	O	Switch output.

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾⁽²⁾

	MIN	MAX	UNIT
V_{IN} Input voltage range	–0.3	6	V
V_{OUT} Output voltage range	–0.3	6	V
V_{BIAS} Bias voltage range	–0.3	6	V
V_{ON} Input voltage range	–0.3	6	V
I_{MAX} Maximum continuous switch current		6	A
I_{PLS} Maximum pulsed switch current, pulse <300 μ s, 2% duty cycle		8	A
T_J Maximum junction temperature		125	°C

- (1) Stresses beyond those listed under [Absolute Maximum Ratings](#) may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under [Recommended Operating Conditions](#) is not implied. Exposure to absolute–maximum–rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal.

7.2 Handling Ratings

			MIN	MAX	UNIT
T _{stg}	Storage temperature range		−65	150	°C
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	−2000	2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	−1000	1000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

			MIN	MAX	UNIT
V _{IN}	Input voltage range		0.8	V _{BIAS}	V
V _{BIAS}	Bias voltage range		2.5	5.7	V
V _{ON}	ON voltage range		0	5.7	V
V _{OUT}	Output voltage range			V _{IN}	V
V _{IH}	High-level input voltage, ON	V _{BIAS} = 2.5 V to 5.7 V	1.2	5.7	V
V _{IL}	Low-level input voltage, ON	V _{BIAS} = 2.5 V to 5.7 V	0	0.5	V
C _{IN}	Input capacitor		1 ⁽¹⁾		μF
T _A	Operating free-air temperature range ⁽²⁾		–40	85	°C

(1) Refer to [Application Information](#) section.

(2) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature [T_{A(max)}] is dependent on the maximum operating junction temperature [T_{J(max)}], the maximum power dissipation of the device in the application [P_{D(max)}], and the junction-to-ambient thermal resistance of the part/package in the application (θ_{JA}), as given by the following equation: T_{A(max)} = T_{J(max)} – (θ_{JA} × P_{D(max)})

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS22965	UNIT
		DSG (8 PINS)	
R _{θJA}	Junction-to-ambient thermal resistance	65.3	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	74.2	
R _{θJB}	Junction-to-board thermal resistance	35.4	
ψ _{JT}	Junction-to-top characterization parameter	2.2	
ψ _{JB}	Junction-to-board characterization parameter	36.0	
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	12.8	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

7.5 Electrical Characteristics, $V_{BIAS} = 5.0\text{ V}$

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature $-40\text{ }^{\circ}\text{C} \leq T_A \leq 85\text{ }^{\circ}\text{C}$ (Full) and $V_{BIAS} = 5.0\text{ V}$. Typical values are for $T_A = 25\text{ }^{\circ}\text{C}$.

PARAMETER	TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
POWER SUPPLIES AND CURRENTS						
$I_{IN(VBIAS-ON)}$ V_{BIAS} quiescent current	$I_{OUT} = 0\text{ mA}$, $V_{IN} = V_{ON} = V_{BIAS} = 5.0\text{ V}$	Full		50	75	μA
$I_{IN(VBIAS-OFF)}$ V_{BIAS} shutdown current	$V_{ON} = \text{GND}$, $V_{OUT} = 0\text{ V}$	Full			2	μA
$I_{IN(VIN-OFF)}$ V_{IN} off-state supply current	$V_{ON} = \text{GND}$, $V_{OUT} = 0\text{ V}$	$V_{IN} = 5.0\text{ V}$	Full	0.2	8	μA
		$V_{IN} = 3.3\text{ V}$		0.02	3	
		$V_{IN} = 1.8\text{ V}$		0.01	2	
		$V_{IN} = 0.8\text{ V}$		0.005	1	
I_{ON} ON pin input leakage current	$V_{ON} = 5.5\text{ V}$	Full			0.5	μA
RESISTANCE CHARACTERISTICS						
R_{ON} ON-state resistance	$I_{OUT} = -200\text{ mA}$, $V_{BIAS} = 5.0\text{ V}$	$V_{IN} = 5.0\text{ V}$	25 $^{\circ}\text{C}$	16	23	$\text{m}\Omega$
			Full		25	
		$V_{IN} = 3.3\text{ V}$	25 $^{\circ}\text{C}$	16	23	$\text{m}\Omega$
			Full		25	
		$V_{IN} = 1.8\text{ V}$	25 $^{\circ}\text{C}$	16	23	$\text{m}\Omega$
			Full		25	
		$V_{IN} = 1.5\text{ V}$	25 $^{\circ}\text{C}$	16	23	$\text{m}\Omega$
			Full		25	
		$V_{IN} = 1.2\text{ V}$	25 $^{\circ}\text{C}$	16	23	$\text{m}\Omega$
			Full		25	
		$V_{IN} = 0.8\text{ V}$	25 $^{\circ}\text{C}$	16	23	$\text{m}\Omega$
			Full		25	
R_{PD} Output pull-down resistance	$V_{IN} = 5.0\text{ V}$, $V_{ON} = 0\text{ V}$, $I_{OUT} = 15\text{ mA}$	Full		225	300	Ω


7.6 Electrical Characteristics, $V_{BIAS} = 2.5\text{ V}$

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature $-40\text{ }^{\circ}\text{C} \leq T_A \leq 85\text{ }^{\circ}\text{C}$ (Full) and $V_{BIAS} = 2.5\text{ V}$. Typical values are for $T_A = 25\text{ }^{\circ}\text{C}$.

PARAMETER		TEST CONDITIONS		T _A	MIN	TYP	MAX	UNIT
POWER SUPPLIES AND CURRENTS								
I _{IN(VBIAS-ON)}	V _{BIAS} quiescent current	I _{OUT} = 0 mA, V _{IN} = V _{ON} = V _{BIAS} = 2.5 V		Full		20	30	μA
I _{IN(VBIAS-OFF)}	V _{BIAS} shutdown current	V _{ON} = GND, V _{OUT} = 0 V		Full			2	μA
I _{IN(VIN-OFF)}	V _{IN} off-state supply current	V _{ON} = GND, V _{OUT} = 0 V	V _{IN} = 2.5 V	Full		0.01	3	μA
			V _{IN} = 1.8 V			0.01	2	
			V _{IN} = 1.2 V			0.005	2	
			V _{IN} = 0.8 V			0.003	1	
I _{ON}	ON pin input leakage current	V _{ON} = 5.5 V		Full			0.5	μA
RESISTANCE CHARACTERISTICS								
R _{ON}	ON-state resistance	I _{OUT} = −200 mA, V _{BIAS} = 2.5 V	V _{IN} = 2.5 V	25°C		20	26	mΩ
				Full			28	
			V _{IN} = 1.8 V	25°C		19	26	mΩ
				Full			28	
			V _{IN} = 1.5 V	25°C		18	25	mΩ
				Full			27	
			V _{IN} = 1.2 V	25°C		18	25	mΩ
				Full			27	
			V _{IN} = 0.8 V	25°C		17	25	mΩ
				Full			27	
R _{PD}	Output pull-down resistance	V _{IN} = 2.5 V, V _{ON} = 0 V, I _{OUT} = 1 mA		Full		275	325	Ω

7.7 Switching Characteristics

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
V _{IN} = V _{ON} = V _{BIAS} = 5 V, T _A = 25°C (unless otherwise noted)					
t _{ON} Turn-on time	R _L = 10 Ω, C _L = 0.1 μF, C _T = 1000 pF		1325	μs	
t _{OFF} Turn-off time			10		
t _R V _{OUT} rise time			1625		
t _F V _{OUT} fall time			3.5		
t _D ON delay time			500		
V _{IN} = 0.8 V, V _{ON} = V _{BIAS} = 5 V, T _A = 25°C (unless otherwise noted)					
t _{ON} Turn-on time	R _L = 10 Ω, C _L = 0.1 μF, C _T = 1000 pF		600	μs	
t _{OFF} Turn-off time			80		
t _R V _{OUT} rise time			300		
t _F V _{OUT} fall time			5.5		
t _D ON delay time			460		
V _{IN} = 2.5V, V _{ON} = 5 V, V _{BIAS} = 2.5 V, T _A = 25°C (unless otherwise noted)					
t _{ON} Turn-on time	R _L = 10 Ω, C _L = 0.1 μF, C _T = 1000 pF		2200	μs	
t _{OFF} Turn-off time			9		
t _R V _{OUT} rise time			2275		
t _F V _{OUT} fall time			3.1		
t _D ON delay time			1075		
V _{IN} = 0.8 V, V _{ON} = 5 V, V _{BIAS} = 2.5 V, T _A = 25°C (unless otherwise noted)					
t _{ON} Turn-on time	R _L = 10 Ω, C _L = 0.1 μF, C _T = 1000 pF		1450	μs	
t _{OFF} Turn-off time			60		
t _R V _{OUT} rise time			875		
t _F V _{OUT} fall time			5.5		
t _D ON delay time			1010		

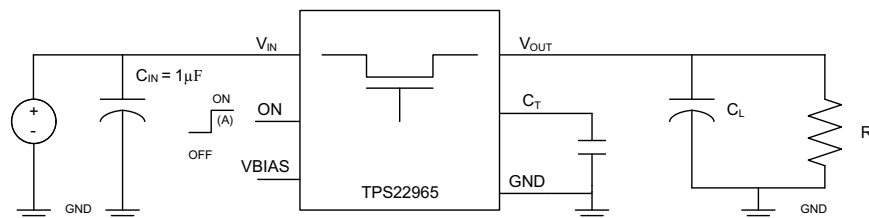

A. Rise and fall times of the control signal is 100 ns.

Figure 1. Test Circuit

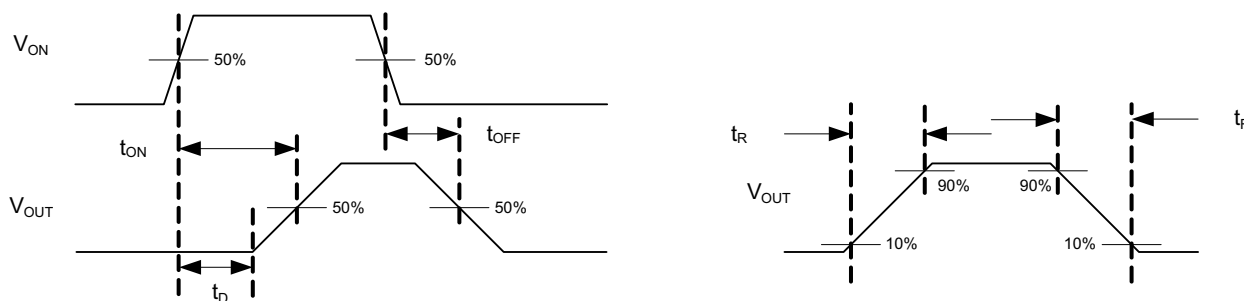
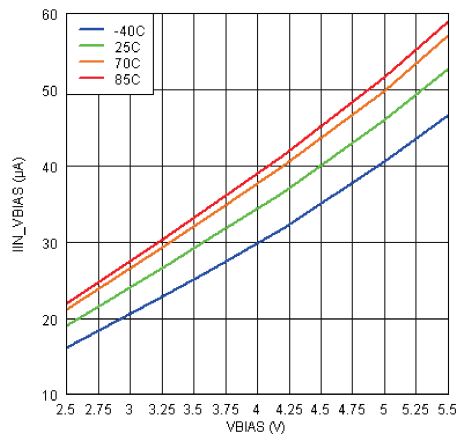
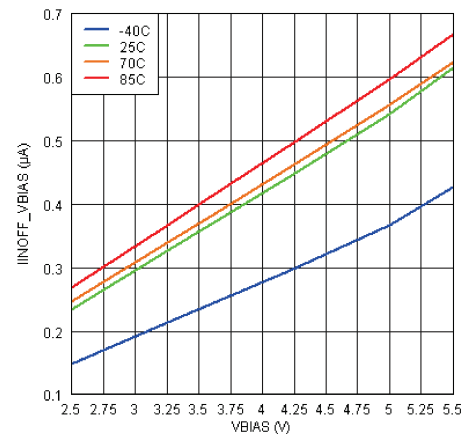
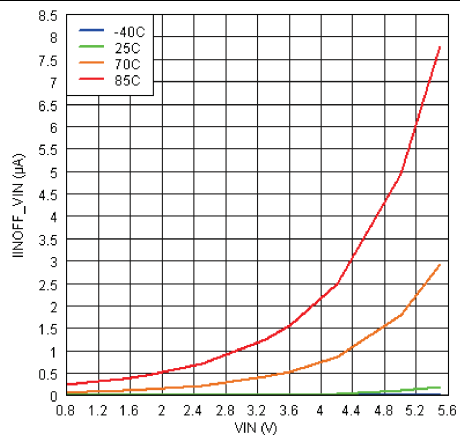
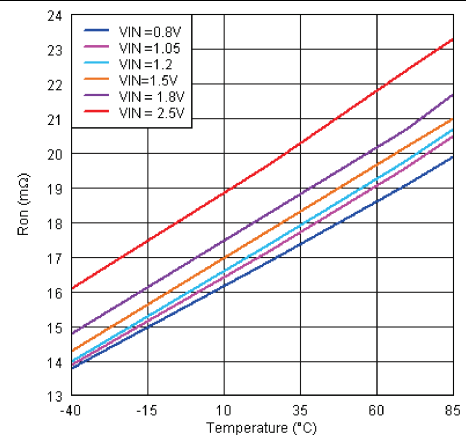
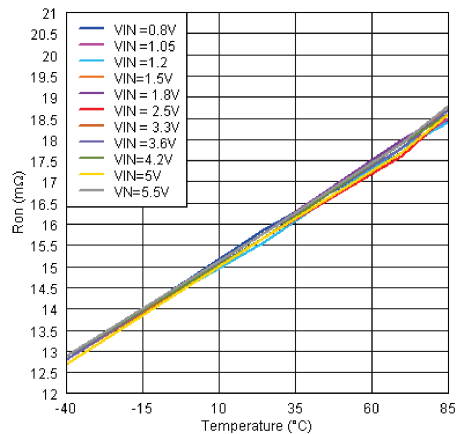
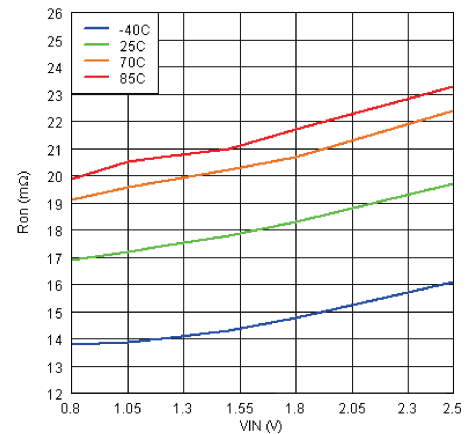
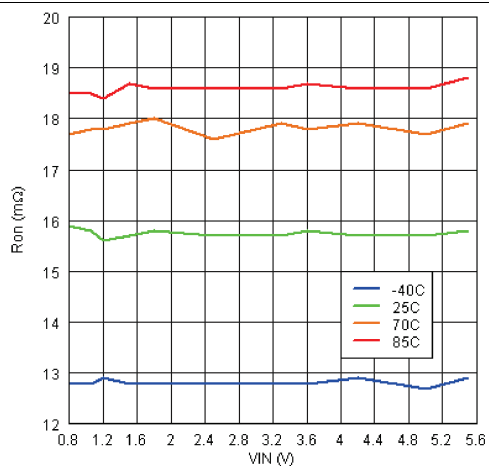


Figure 2. t_{ON}/t_{OFF} Waveforms

7.8 Typical Characteristics



 $V_{IN} = V_{BIAS}$ $V_{ON} = 5\text{ V}$ $V_{OUT} = \text{Open}$
Figure 3. Quiescent Current vs V_{BIAS}

 $V_{IN} = V_{BIAS}$ $V_{ON} = 0\text{ V}$ $V_{OUT} = 0\text{ V}$
Figure 4. Shutdown Current v. V_{BIAS}

 $V_{BIAS} = 5.5\text{ V}$ $V_{ON} = 0\text{ V}$ $V_{OUT} = 0\text{ V}$
Figure 5. Off-state VIN Current vs V_{IN}

 $V_{BIAS} = 2.5\text{ V}$ $I_{OUT} = -200\text{ mA}$
Figure 6. R_{ON} vs Temperature

 $V_{BIAS} = 5.5\text{ V}$ $I_{OUT} = -200\text{ mA}$
Figure 7. R_{ON} vs Temperature

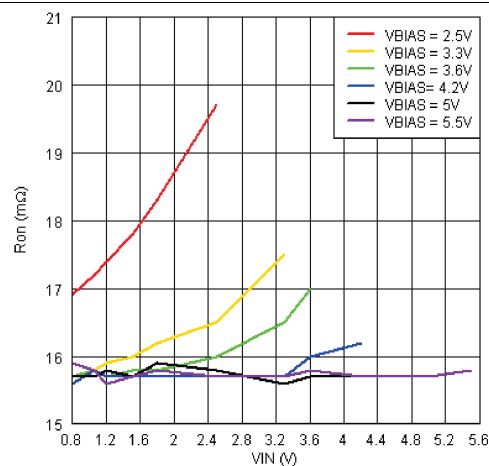 $V_{BIAS} = 2.5\text{ V}$ $I_{OUT} = -200\text{ mA}$
Figure 8. R_{ON} vs V_{IN}

Typical Characteristics (continued)




$V_{BIAS} = 5.5 \text{ V}$ $I_{OUT} = -200 \text{ mA}$

Figure 9. R_{ON} vs V_{IN}




$T_A = 25^\circ\text{C}$ $I_{OUT} = -200 \text{ mA}$

Figure 10. R_{ON} vs V_{IN}

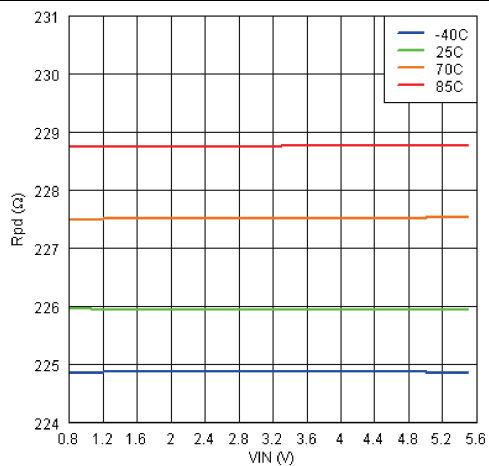


$V_{BIAS} = 5.5 \text{ V}$ $V_{ON} = 0 \text{ V}$ $IPD = 1 \text{ mA}$

Figure 11. R_{PD} vs V_{IN}

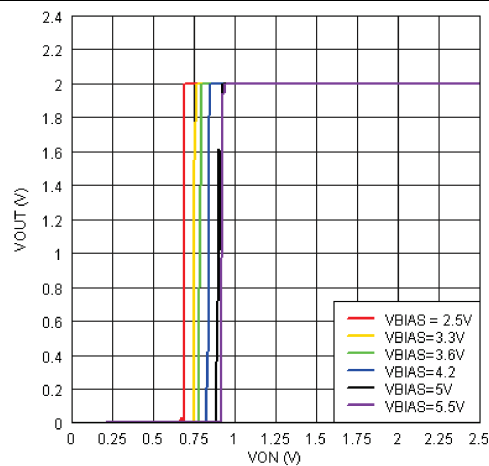


$T_A = 25^\circ\text{C}$ $V_{IN} = 2 \text{ V}$

Figure 12. V_{OUT} vs V_{ON}

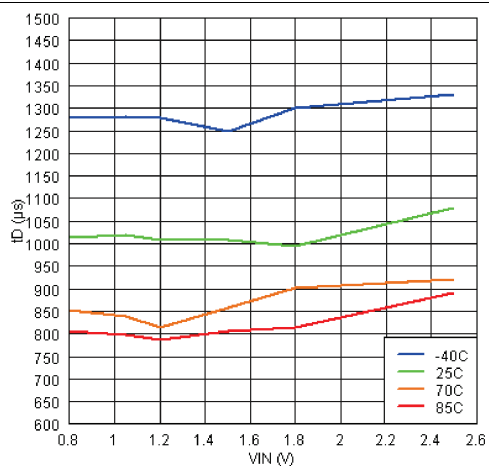

$V_{BIAS} = 2.5 \text{ V}$ $CT = 1 \text{ nF}$


Figure 13. t_D vs V_{IN}

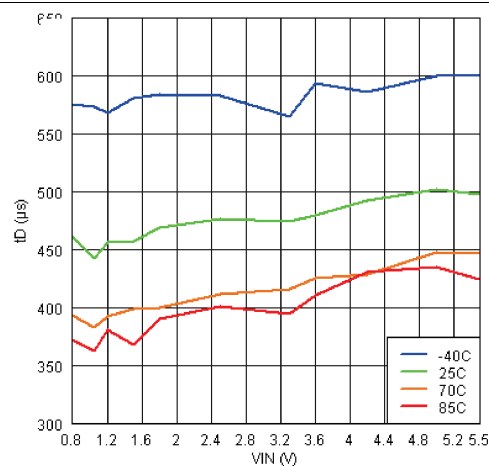

$V_{BIAS} = 5.5 \text{ V}$ $CT = 1 \text{ nF}$

Figure 14. t_D vs V_{IN}


Typical Characteristics (continued)

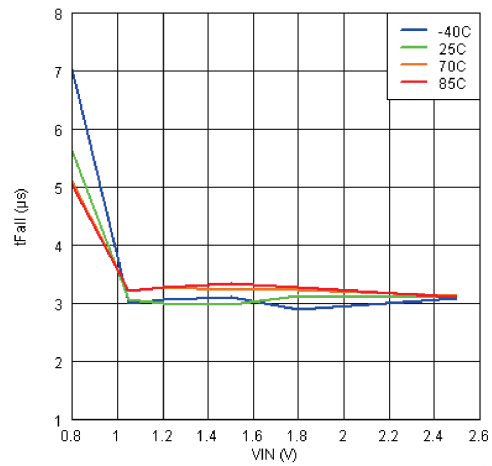

$V_{BIAS} = 2.5\text{ V}$

$CT = 1\text{ nF}$


Figure 15. t_F vs V_{IN}

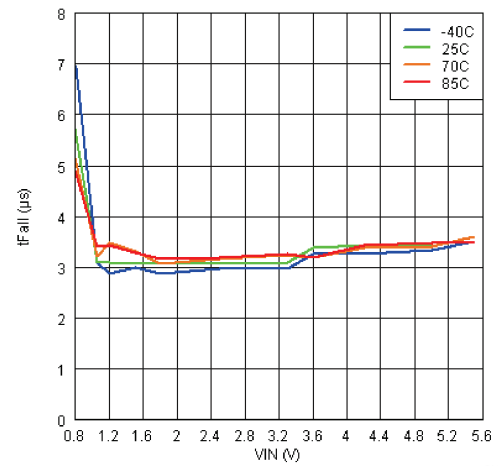

$V_{BIAS} = 5.5\text{ V}$

$CT = 1\text{ nF}$


Figure 16. t_F vs V_{IN}

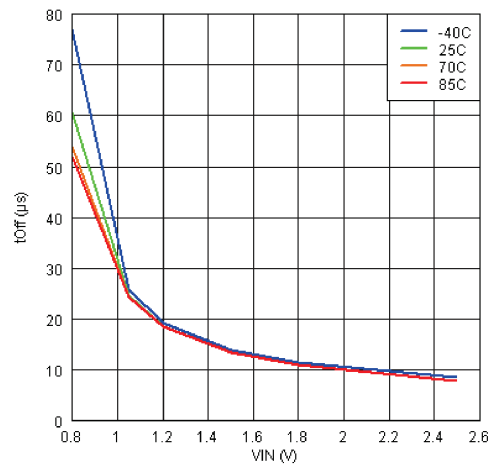

$V_{BIAS} = 2.5\text{ V}$

$CT = 1\text{ nF}$


Figure 17. t_{OFF} vs V_{IN}

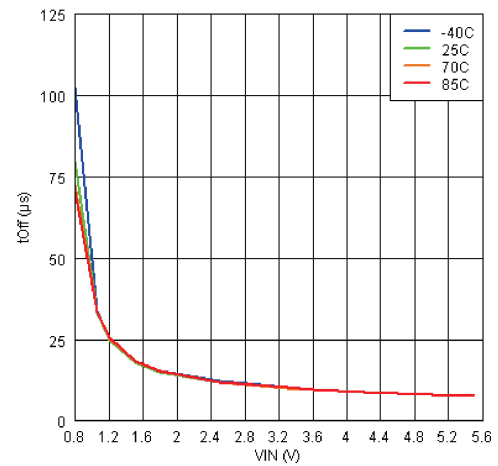

$V_{BIAS} = 5.5\text{ V}$

$CT = 1\text{ nF}$


Figure 18. t_{OFF} vs V_{IN}

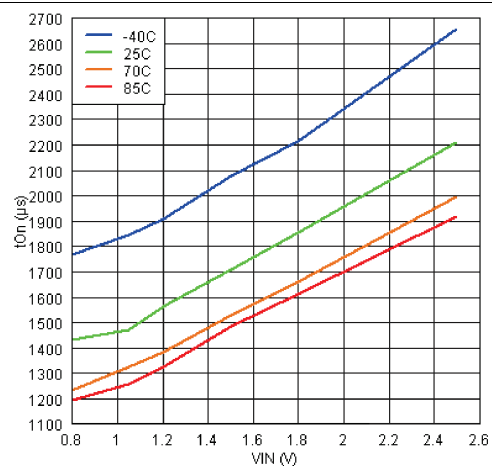

$V_{BIAS} = 2.5\text{ V}$

$CT = 1\text{ nF}$

Figure 19. t_{ON} vs V_{IN}

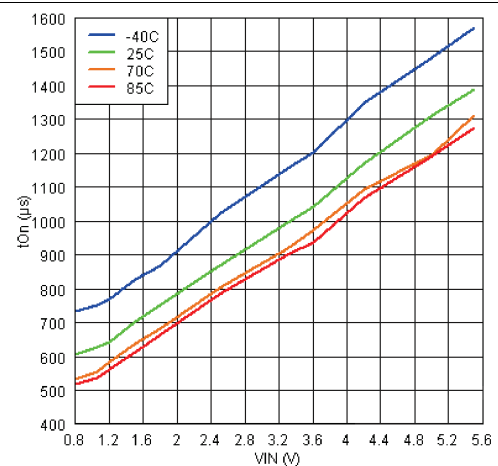

$V_{BIAS} = 5.5\text{ V}$

$CT = 1\text{ nF}$

Figure 20. t_{ON} vs V_{IN}

Typical Characteristics (continued)

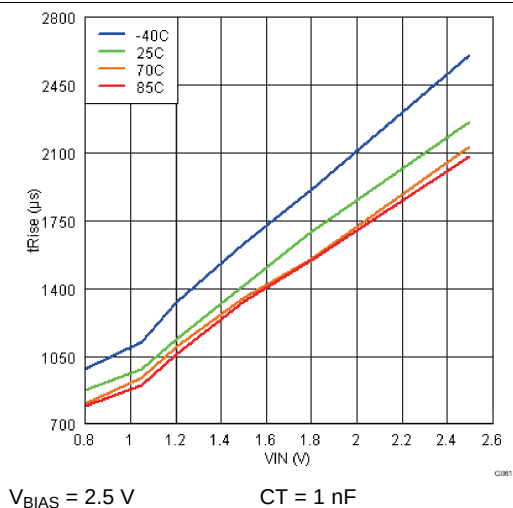


Figure 21. t_R vs V_{IN}

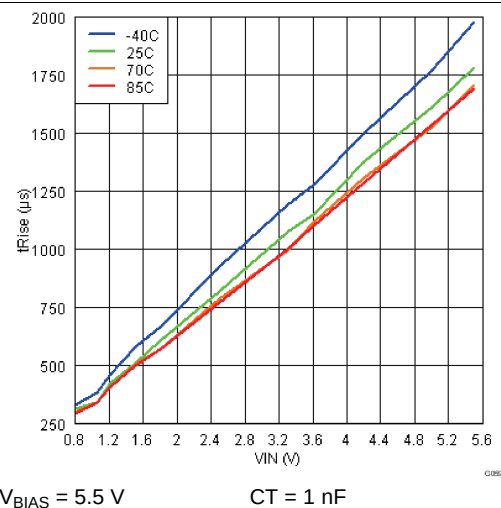


Figure 22. t_R vs V_{IN}

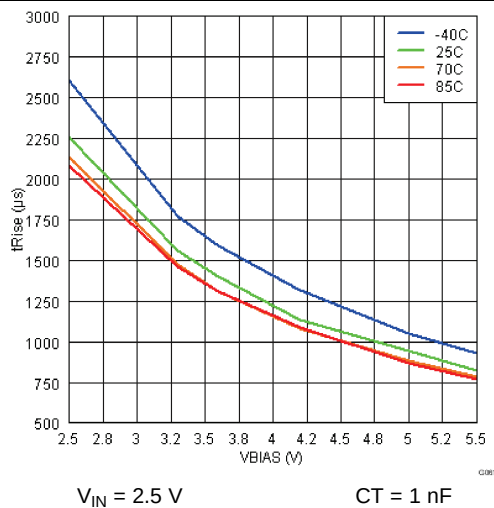


Figure 23. t_R vs V_{BIAS}

7.9 Typical Switching Characteristics

$T_A = 25^\circ\text{C}$, $C_T = 1\text{ nF}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_L = 0.1\text{ }\mu\text{F}$, $R_L = 10\text{ }\Omega$, CH1 = V_{OUT} , CH2 = V_{ON}

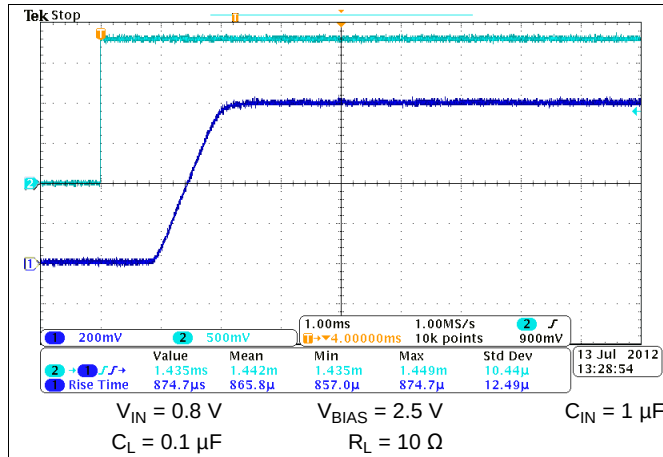


Figure 24. Turn-on Response Time

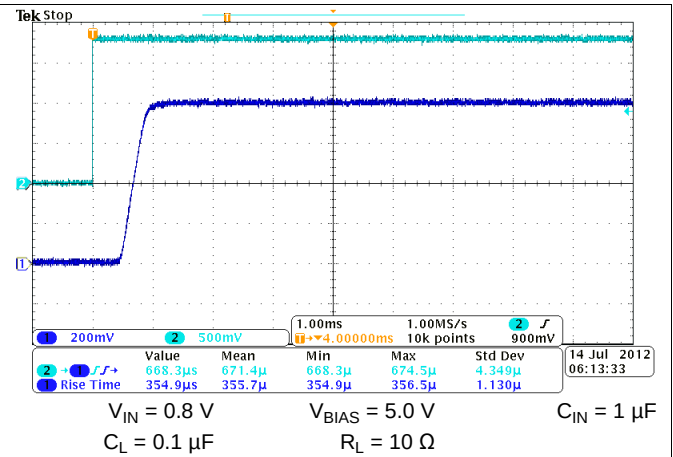


Figure 25. Turn-on Response Time

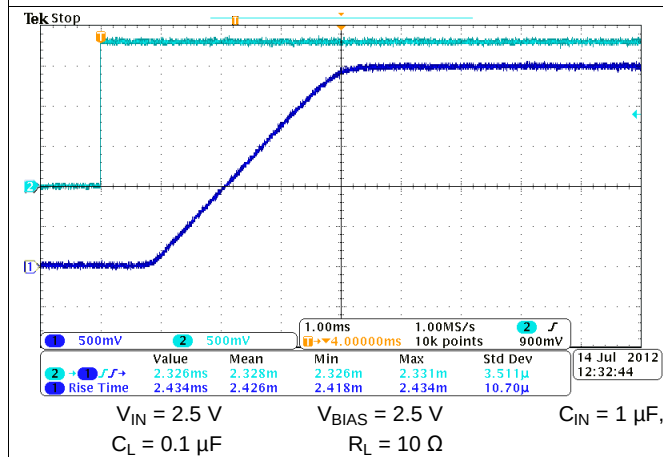


Figure 26. Turn-on Response Time

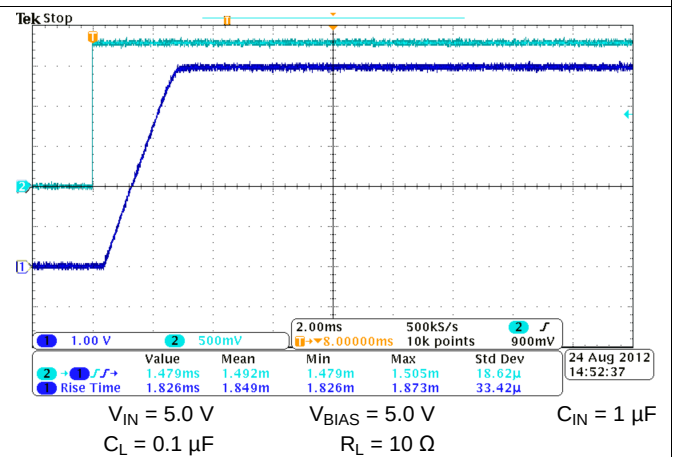


Figure 27. Turn-off Response Time

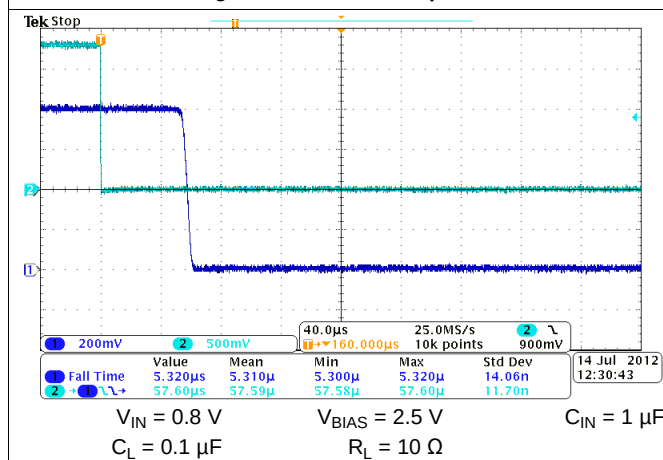


Figure 28. Turn-off Response Time



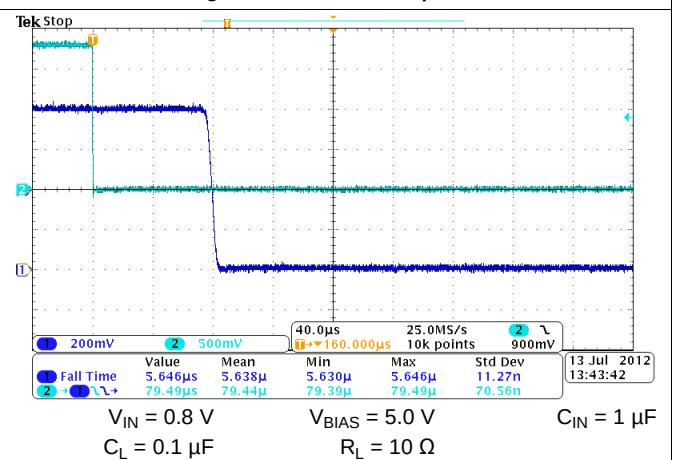


Figure 29. Turn-on Response Time

Typical Switching Characteristics (continued)

$T_A = 25^\circ\text{C}$, $C_T = 1\text{ nF}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_L = 0.1\text{ }\mu\text{F}$, $R_L = 10\text{ }\Omega$, CH1 = V_{OUT} , CH2 = V_{ON}

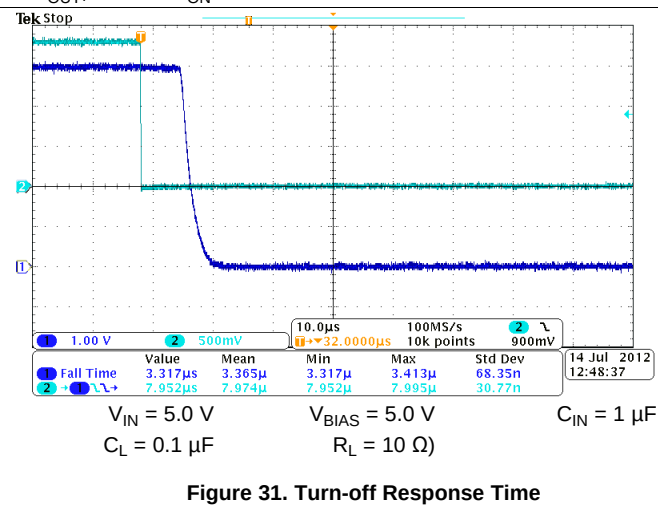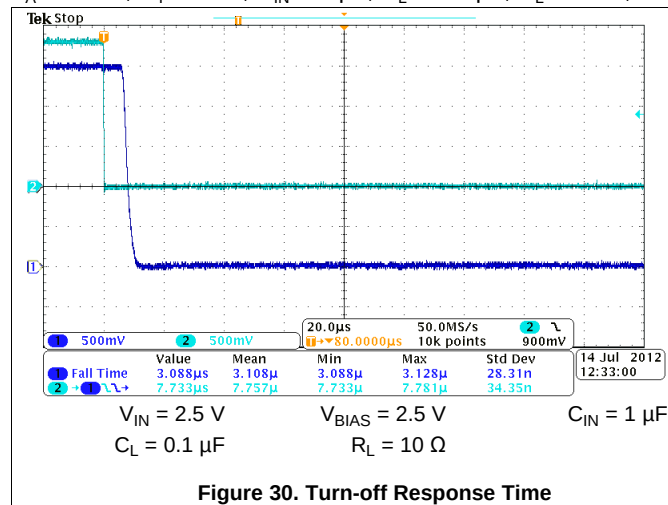


8 Detailed Description

8.1 Overview

The device is a single channel, 6-A load switch in an 8-terminal SON package. To reduce the voltage drop in high current rails, the device implements an ultra-low resistance N-channel MOSFET. The device has a programmable slew rate for applications that require specific rise-time.

The device has very low leakage current during off state. This prevents downstream circuits from pulling high standby current from the supply. Integrated control logic, driver, power supply, and output discharge FET eliminates the need for any external components, which reduces solution size and bill of materials (BOM) count.

8.2 Functional Block Diagram

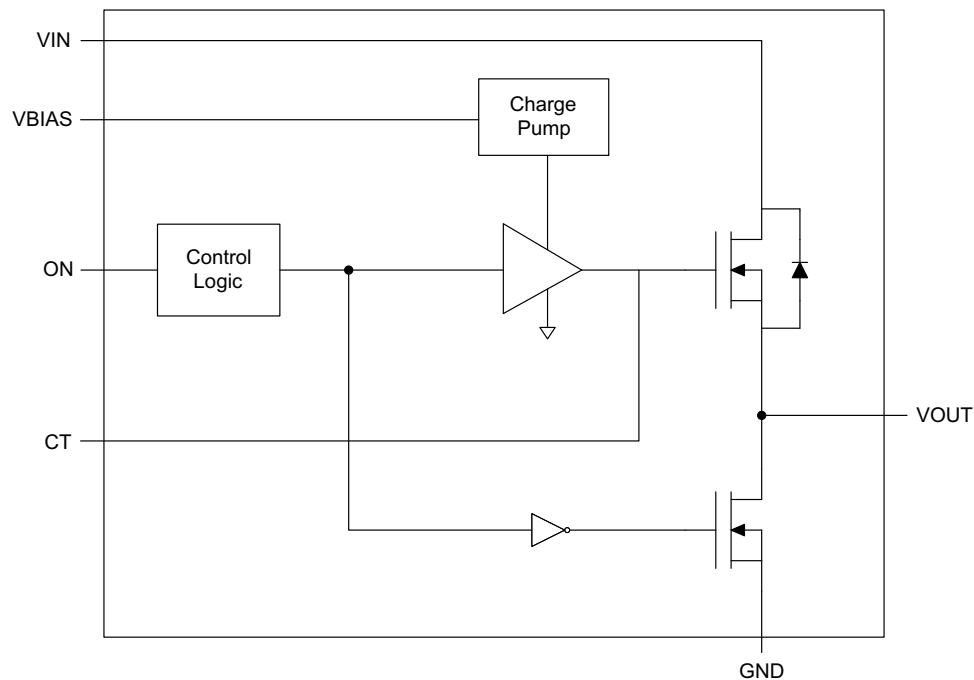

8.3 Feature Description

8.3.1 Adjustable Rise Time

A capacitor to GND on the CT terminal sets the slew rate. The voltage on the CT terminal can be as high as 12 V. Therefore, the minimum voltage rating for the CT cap should be 25 V for optimal performance. An approximate formula for the relationship between CT and slew rate when V_{BIAS} is set to 5 V is shown in Equation 1 below. This equation accounts for 10% to 90% measurement on V_{OUT} and does **NOT** apply for CT = 0 pF. Use table below to determine rise times for when CT = 0 pF.

$$SR = 0.39 \times CT + 13.4 \quad (1)$$

Where,

SR = slew rate (in $\mu\text{s/V}$)

CT = the capacitance value on the CT terminal (in pF)

The units for the constant 13.4 are $\mu\text{s/V}$. The units for the constant 0.39 are $\mu\text{s}/(\text{V} \times \text{pF})$.

Rise time can be calculated by multiplying the input voltage by the slew rate. The table below contains rise time values measured on a typical device. Rise times shown below are only valid for the power-up sequence where V_{IN} and V_{BIAS} are already in steady state condition before the ON terminal is asserted high.

Table 1. Rise Time vs CT Capacitor

CT (pF)	RISE TIME (μs) 10% - 90%, $C_L = 0.1 \mu\text{F}$, $C_{IN} = 1 \mu\text{F}$, $R_L = 10 \Omega$, $V_{BIAS} = 5 \text{ V}$ TYPICAL VALUES at 25°C with a 25V X7R 10% CERAMIC CAPACITOR on CT						
	$V_{IN} = 5 \text{ V}$	$V_{IN} = 3.3 \text{ V}$	$V_{IN} = 1.8 \text{ V}$	$V_{IN} = 1.5 \text{ V}$	$V_{IN} = 1.2 \text{ V}$	$V_{IN} = 1.05 \text{ V}$	$V_{IN} = 0.8 \text{ V}$
0	127	93	62	55	51	46	42
220	475	314	188	162	141	125	103
470	939	637	359	304	255	218	188
1000	1869	1229	684	567	476	414	344
2200	4020	2614	1469	1211	1024	876	681
4700	8690	5746	3167	2703	2139	1877	1568
10000	18360	12550	6849	5836	4782	4089	3449

8.3.2 Quick Output Discharge

The TPS22965 includes a Quick Output Discharge (QOD) feature. When the switch is disabled, a discharge resistor is connected between V_{OUT} and GND. This resistor has a typical value of 225- Ω and prevents the output from floating while the switch is disabled.

8.3.3 Low Power Consumption During Off State

The I_{SD} V_{IN} supply current is 0.01- μA typical at 1.8- V_{IN} . Typically, the downstream loads would have a significantly higher off-state leakage current. The load switch allows system standby power consumption to be reduced.

8.4 Device Functional Modes

Table 2. Functional Table

ON	V_{IN} to V_{OUT}	V_{OUT} to GND
L	Off	On
H	On	Off

9 Application and Implementation

9.1 Application Information

9.1.1 ON/OFF Control

The ON pin controls the state of the switch. Asserting ON high enables the switch. ON is active high and has a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic thresholds. It can be used with any microcontroller with 1.2 V or higher GPIO voltage. This pin cannot be left floating and must be driven either high or low for proper functionality.

9.1.2 Input Capacitor (Optional)

To limit the voltage drop on the input supply caused by transient inrush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between VIN and GND. A 1-μF ceramic capacitor, CIN, placed close to the pins, is usually sufficient. Higher values of CIN can be used to further reduce the voltage drop during high current applications. When switching heavy loads, it is recommended to have an input capacitor about 10 times higher than the output capacitor to avoid excessive voltage drop.

9.1.3 Output Capacitor (Optional)

Due to the integrated body diode in the NMOS switch, a CIN greater than CL is highly recommended. A CL greater than CIN can cause VOUT to exceed VIN when the system supply is removed. This could result in current flow through the body diode from VOUT to VIN. A CIN to CL ratio of 10 to 1 is recommended for minimizing VIN dip caused by inrush currents during startup, however a 10 to 1 ratio for capacitance is not required for proper functionality of the device. A ratio smaller than 10 to 1 (such as 1 to 1) could cause slightly more VIN dip upon turn-on due to inrush currents. This can be mitigated by increasing the capacitance on the CT pin for a longer rise time (see [Adjustable Rise Time](#) section below).

9.1.4 VIN and VBIAS Voltage Range

For optimal RON performance, make sure VIN ≤ VBIAS. The device will still be functional if VIN > VBIAS but it will exhibit RON greater than what is listed in the [Electrical Characteristics](#) table. See [Figure 32](#) for an example of a typical device. Notice the increasing RON as VIN exceeds VBIAS voltage. Be sure to never exceed the maximum voltage rating for VIN and VBIAS.

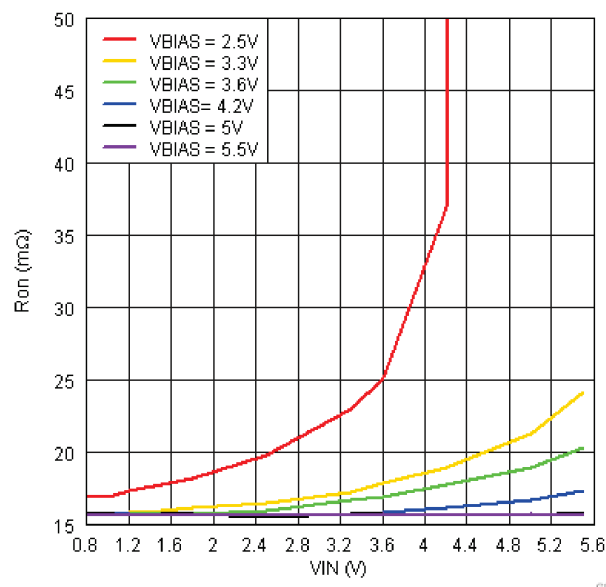

 $T_A = 25\text{ }^{\circ}\text{C}$
 $I_{OUT} = -200\text{ mA}$

Figure 32. RON vs. VIN

9.2 Typical Application

This application demonstrates how the TPS22965 can be used to power downstream modules.

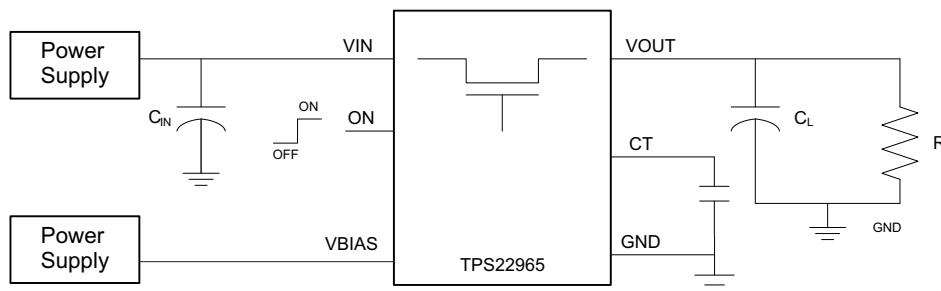


Figure 33. Powering a Downstream Module

9.2.1 Design Requirements

DESIGN PARAMETER	EXAMPLE VALUE
V_{IN}	3.3 V
V_{BIAS}	5 V
C_L	22 μ F
Maximum Acceptable Inrush Current	400 mA

9.2.2 Detailed Design Procedure

9.2.2.1 Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0-V to the set value (3.3-V in this example). This charge arrives in the form of inrush current. Inrush current can be calculated using the following equation:

$$\text{Inrush Current} = C \times dV/dt \quad (2)$$

Where:

C = output capacitance

dV = output voltage

dt = rise time



The TPS22965 offers adjustable rise time for VOUT. This feature allows the user to control the inrush current during turn-on. The appropriate rise time can be calculated using the design requirements and the inrush current equation.

$$400 \text{ mA} = 22 \text{ } \mu\text{F} \times 3.3 \text{ V}/dt \quad (3)$$

$$dt = 181.5 \text{ } \mu\text{s} \quad (4)$$

To ensure an inrush current of less than 400 mA, choose a CT value that will yield a rise time of more than 181.5 μ s. See the oscilloscope captures below for an example of how the CT capacitor can be used to reduce inrush current.

9.2.3 Application Curves

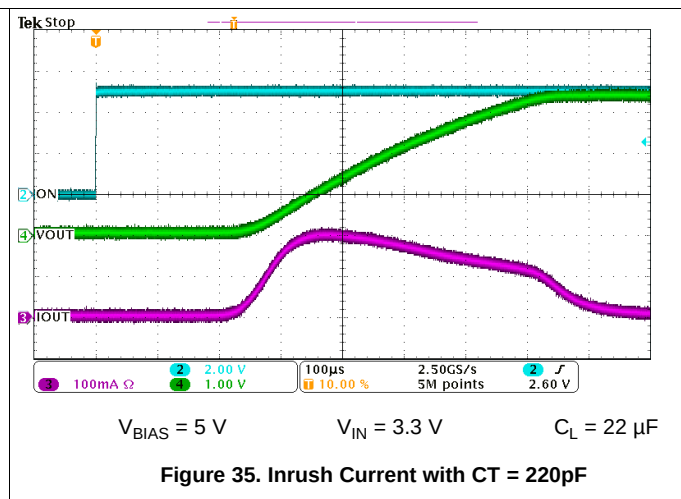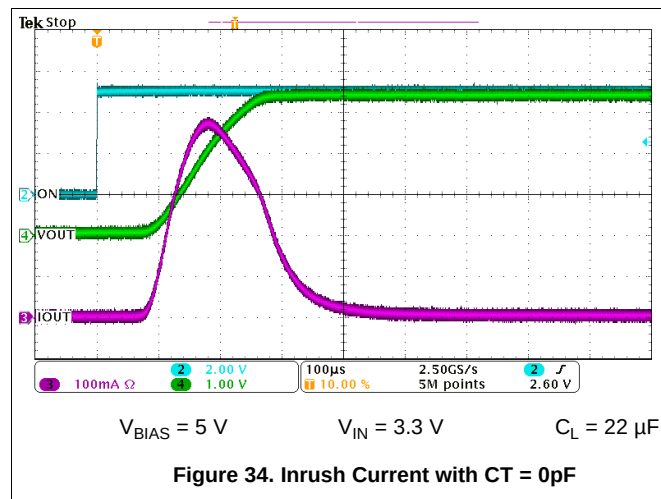

10 Power Supply Recommendations


The device is designed to operate from a VBIAS range of 2.5 V to 5.7 V and a VIN range of 0.8 V to VBIAS.

11 Layout

11.1 Layout Guidelines

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for VIN, VOUT, and GND helps minimize the parasitic electrical effects along with minimizing the case to ambient thermal impedance. The CT trace should be as short as possible to avoid parasitic capacitance.

11.2 Layout Example

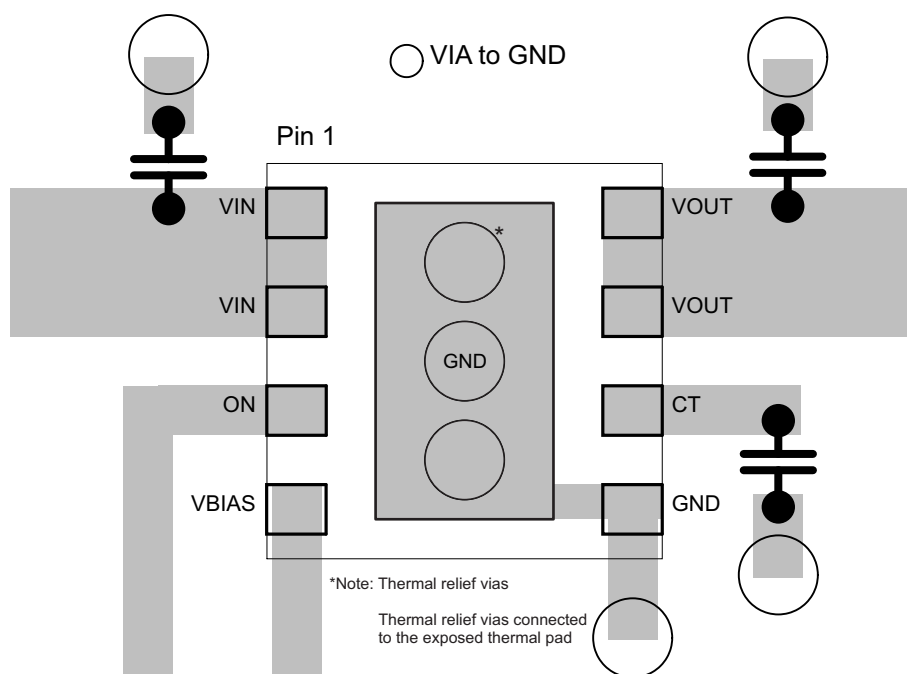

11.3 Thermal Considerations

The maximum IC junction temperature should be restricted to 125°C under normal operating conditions. To calculate the maximum allowable dissipation, $P_{D(max)}$ for a given output current and ambient temperature, use the following equation as a guideline:

$$P_{D(max)} = \frac{T_{J(max)} - T_A}{\Theta_{JA}} \quad (5)$$

Where:

$P_{D(max)}$ = maximum allowable power dissipation

$T_{J(max)}$ = maximum allowable junction temperature (125°C for the TPS22965)

T_A = ambient temperature of the device

Θ_{JA} = junction to air thermal impedance. See [Thermal Information](#) section. This parameter is highly dependent upon board layout.

Refer to the [Layout Example](#), notice that the thermal vias are located under the exposed thermal pad of the device. This allows for thermal diffusion away from the device.

12 器件和文档支持

12.1 商标

Ultrabook is a trademark of Intel.

All other trademarks are the property of their respective owners.

12.2 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

12.3 术语表

[SLYZ022](#) — TI 术语表。

这份术语表列出并解释术语、首字母缩略词和定义。

13 机械封装和可订购信息

以下页中包括机械封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com.cn/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2014, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS22965DSGR	ACTIVE	WSO	DSG	8	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 105	ZSA0	Samples
TPS22965DSGT	ACTIVE	WSO	DSG	8	250	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 105	ZSA0	Samples
TPS22965NDSGR	ACTIVE	WSO	DSG	8	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 105	ZDVI	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.




www.ti.com

PACKAGE OPTION ADDENDUM

10-Dec-2020


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

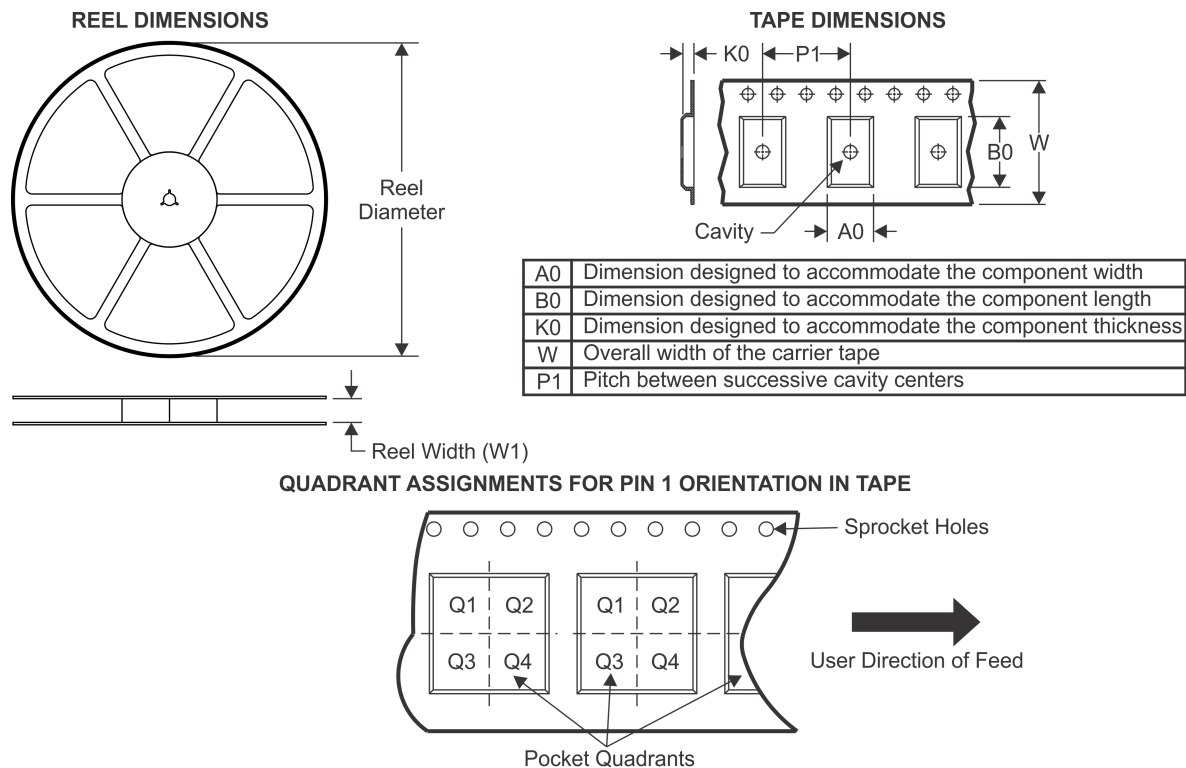TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22965DSGR	WSO	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS22965DSGT	WSO	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS22965NDSGR	WSO	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2

TAPE AND REEL BOX DIMENSIONS

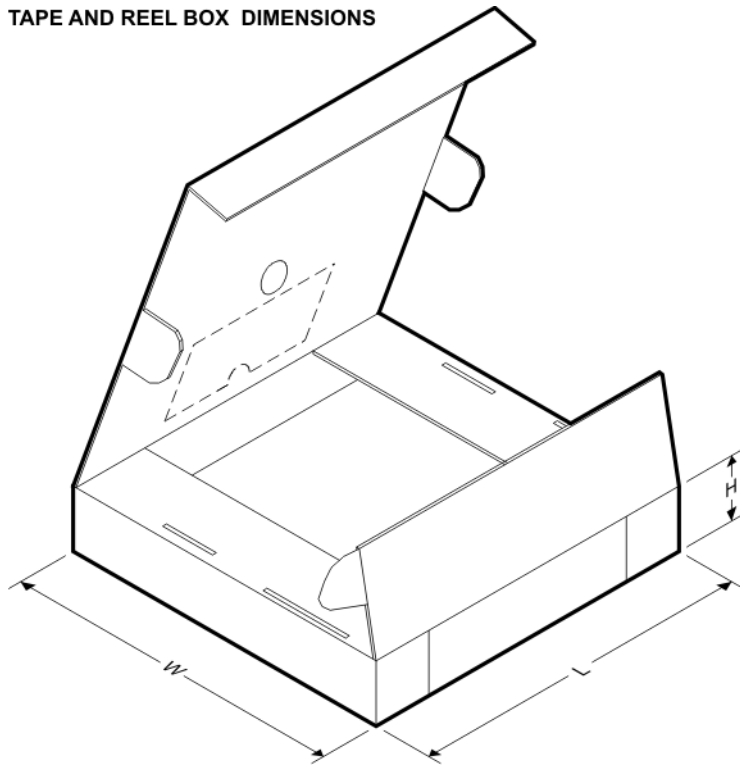

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22965DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS22965DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS22965NDSGR	WSON	DSG	8	3000	210.0	185.0	35.0

GENERIC PACKAGE VIEW


DSG 8

WSON - 0.8 mm max height



2 x 2, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

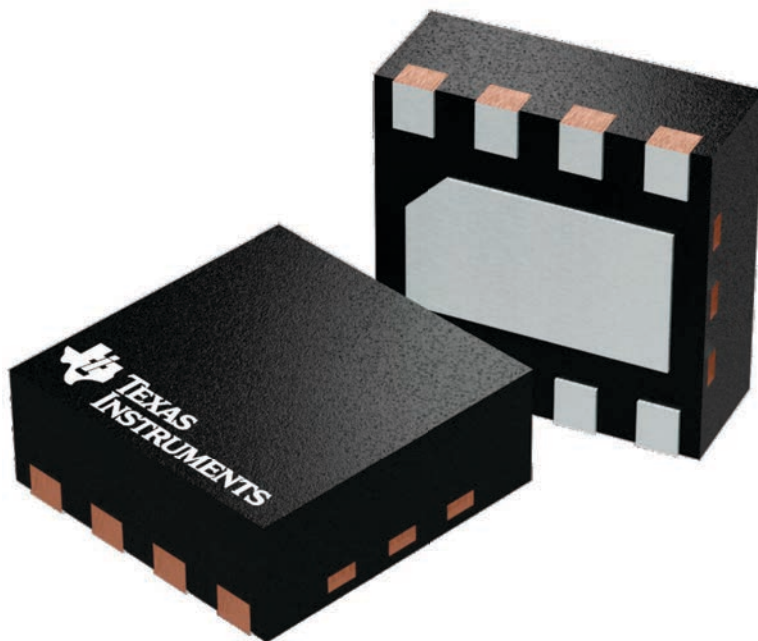

4224783/A

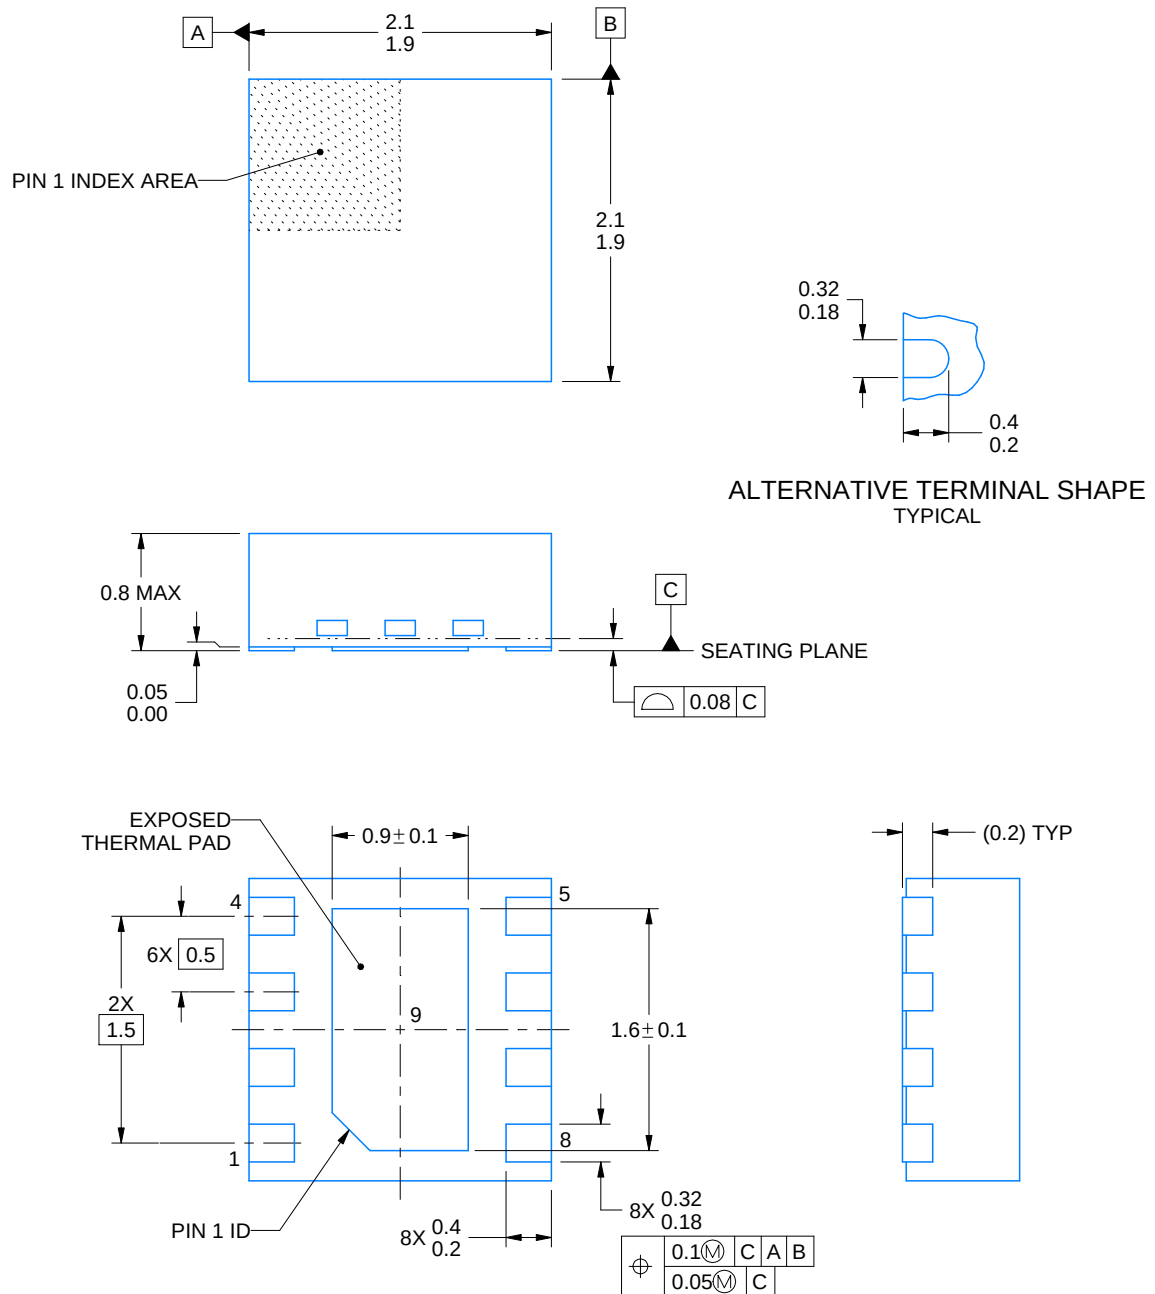

4218900/D 04/2020


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


DSG0008A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

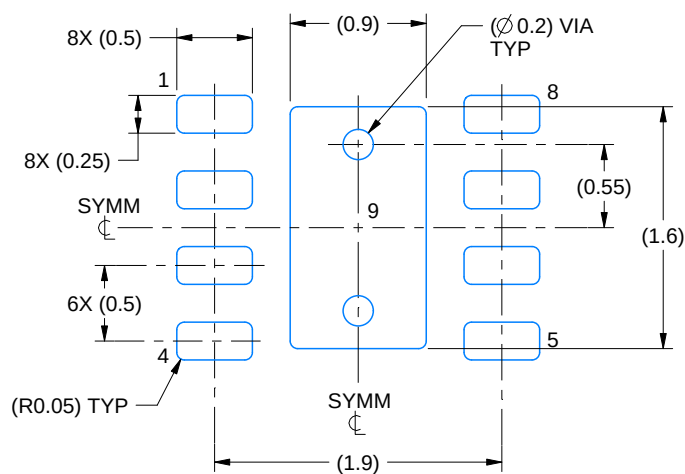

LAND PATTERN EXAMPLE
SCALE:20X

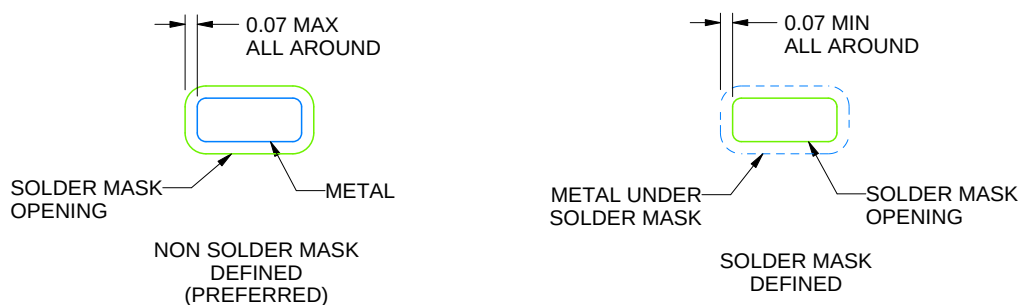

SOLDER MASK DETAILS

4218900/D 04/2020

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

DSG0008A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

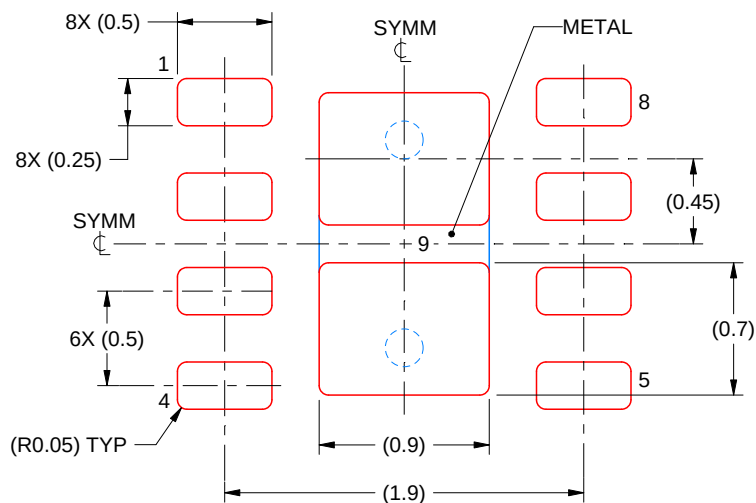

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:
87% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4218900/D 04/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司