



TPS2296xC 具有反向电流保护和受控接通功能的 5.5V、3A、13mΩ 导通电阻负载开关


1 特性

- 集成 N 通道负载开关
- 输入电压范围：1V 至 5.5V
- 内部导通 FET $R_{DS(ON)} = 8m\Omega$ (典型值)
- 超低导通电阻
 - $R_{ON} = 13m\Omega$ (典型值)，此时 $V_{IN} = 5V$
 - $R_{ON} = 14m\Omega$ (典型值)，此时 $V_{IN} = 3.3V$
 - $R_{ON} = 18m\Omega$ (典型值)，此时 $V_{IN} = 1.8V$
- 3A 最大持续开关电流
- 反向电流保护 (禁用时)
- 低关断电流 (760nA)
- 1.3V GPIO 低阈值控制输入
- 受控转换率可避免浪涌电流
- 快速输出放电 (只适用于 TPS22964)
- 六引脚晶圆级芯片规模封装 (标称尺寸 - 请参见附录了解详细信息)
 - 0.9mm x 1.4mm, 0.5mm 焊球间距, 0.5mm 高度 (YZP)
- 经测试, 静电放电 (ESD) 性能符合 JESD 22 规范
 - 2kV 人体模型 (A114-B, II 类)
 - 500V 充电器件模型 (C101)

2 应用

- 智能手机
- 笔记本电脑和 超极本™
- 平板电脑
- 固态硬盘 (SSD)
- 数字电视 (DTV)/IP 机顶盒
- POS 终端及媒体网关

4 简化电路原理图

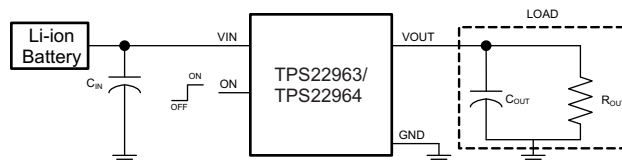

3 说明

TPS22963/64 是一款具有受控接通功能的小型超低 R_{ON} 负载开关。此器件包含一个低 $R_{DS(ON)}$ N 通道金属氧化物半导体场效应晶体管 (MOSFET)，可在 1V 至 5.5V 输入电压范围内运行并支持高达 3A 的开关电流。采用集成电荷泵偏置 NMOS 开关，从而获得一个低开关导通电阻。此开关可由一个打开/关闭输入 (ON) 控制，此输入可与低压 GPIO 控制信号直接对接。TPS22963/64 器件的上升时间受到内部控制以避免浪涌电流。

TPS22963/64 提供反向电流保护。当电源开关禁用时，该器件将防止电流流向开关输入端。反向电流保护功能只有在该器件禁用时才有效，以便允许某些应用中特意的反向电流 (开关使能时)。

TPS22963/64 采用超小型、节省空间的 6 引脚晶圆级芯片 (WCSP) 封装，额定工作环境温度范围为 $-40^{\circ}C$ 至 $85^{\circ}C$ 。

器件信息(1)

器件型号	封装	封装尺寸 (标称值)
TPS2296xC	DSBGA (6)	1.40mm x 0.90mm

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。



目录

1	特性	1	10	Detailed Description	14
2	应用	1	10.1	Overview	14
3	说明	1	10.2	Functional Block Diagram	14
4	简化电路原理图	1	10.3	Feature Description	15
5	修订历史记录	2	10.4	Device Functional Modes	15
6	Device Comparison Table	3	11	Application and Implementation	15
7	Pin Configuration and Functions	3	11.1	Application Information	15
8	Specifications	4	11.2	Typical Application	17
8.1	Absolute Maximum Ratings	4	12	Power Supply Recommendations	19
8.2	ESD Ratings	4	13	Layout	19
8.3	Recommended Operating Conditions	4	13.1	Layout Guidelines	19
8.4	Thermal Information	4	13.2	Layout Example	19
8.5	Electrical Characteristics	5	14	器件和文档支持	20
8.6	Switching Characteristics	6	14.1	相关链接	20
8.7	Typical Electrical Characteristics	7	14.2	商标	20
8.8	Typical Switching Characteristics	9	14.3	静电放电警告	20
8.9	Typical AC Scope Captures at $T_A = 25^\circ\text{C}$	10	14.4	术语表	20
9	Parametric Measurement Information	13	15	机械封装和可订购信息	20

5 修订历史记录

Changes from Original (June 2013) to Revision A

Page

- 已添加 引脚配置和功能部分, ESD 额定值表, 特性描述部分, 器件功能模式, 应用和实施部分, 电源相关建议部分, 布局部分, 器件和文档支持部分以及机械、封装和可订购信息部分 **1**


6 Device Comparison Table

	R_{ON} (Typ) at 3.3 V	Rise Time (Typ) at 3.3 V ⁽¹⁾	Quick Output Discharge (QOD) ⁽²⁾	Maximum Output Current	Enable
TPS22963C	14 mΩ	715 μs	No	3 A	Active High
TPS22964C	14 mΩ	715 μs	Yes	3 A	Active High

(1) Additional rise time options are possible. Contact factory for more information.

(2) This feature discharges the output of the switch to ground through a 273 Ω resistor, preventing the output from floating (only in TPS22964C).

7 Pin Configuration and Functions

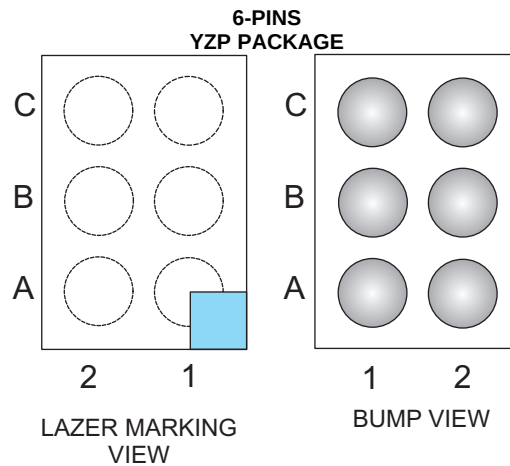

Pin Assignments (YZP Package)

C	GND	ON
B	VOUT	VIN
A	VOUT	VIN
	1	2

Pin Functions

PIN		I/O	DESCRIPTION
TPS22963/64	NAME		
C1	GND	-	Ground
C2	ON	I	Switch control input, active high. Do not leave floating
A1, B1	VOUT	O	Switch output
A2, B2	VIN	I	Switch input. Use a bypass capacitor to ground (ceramic)

8 Specifications

8.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V_{IN}	Input voltage range	−0.3	6	V
V_{OUT}	Output voltage range	−0.3	6	V
V_{ON}	ON pin voltage range	−0.3	6	V
I_{MAX}	Maximum continuous switch current		3	A
I_{PLS}	Maximum pulsed switch current, 100 μ s pulse, 2% duty cycle, $T_A = -40^{\circ}\text{C}$ to 85°C		4	A
T_A	Operating free air temperature range	−40	85	$^{\circ}\text{C}$
T_J	Maximum junction temperature		125	$^{\circ}\text{C}$
T_{stg}	Storage temperature range	−65	150	$^{\circ}\text{C}$

8.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	± 2000
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	± 500

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.

8.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V_{IN}	Input voltage range	1		5.5	V
V_{OUT}	Output voltage range	0		5.5	V
$V_{IH, ON}$	High-level ON voltage	$V_{IN} = 2.5\text{ V to }5.5\text{ V}$		5.5	V
		$V_{IN} = 1\text{ V to }2.49\text{ V}$		5.5	
$V_{IL, ON}$	Low-level ON voltage	$V_{IN} = 2.5\text{ V to }5.5\text{ V}$		0.6	V
		$V_{IN} = 1\text{ V to }2.49\text{ V}$		0.4	
C_{IN}	Input capacitor		1 ⁽¹⁾		μF

- (1) Refer to the application section

8.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS2296xC	UNIT
		YZP	
		6 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	132.0	$^{\circ}\text{C/W}$
$R_{\theta JCtop}$	Junction-to-case (top) thermal resistance	1.4	
$R_{\theta JB}$	Junction-to-board thermal resistance	22.8	
Ψ_{JT}	Junction-to-top characterization parameter	5.7	
Ψ_{JB}	Junction-to-board characterization parameter	22.6	

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

8.5 Electrical Characteristics

 $V_{IN} = 1\text{ V to }5.5\text{ V}$, $T_A = -40^{\circ}\text{C to }85^{\circ}\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
$I_{Q, VIN}$	Quiescent current	$I_{OUT} = 0$, $V_{ON} = V_{IN} = 5\text{ V}$	Full	66.5	96		μA
		$I_{OUT} = 0$, $V_{ON} = V_{IN} = 4.5\text{ V}$	Full	57	82		
		$I_{OUT} = 0$, $V_{ON} = V_{IN} = 3.3\text{ V}$	Full	38	60		
		$I_{OUT} = 0$, $V_{ON} = V_{IN} = 2.5\text{ V}$	Full	33.3	55		
		$I_{OUT} = 0$, $V_{ON} = V_{IN} = 1.8\text{ V}$	Full	28.3	45		
		$I_{OUT} = 0$, $V_{ON} = V_{IN} = 1.2\text{ V}$	Full	22.8	36		
		$I_{OUT} = 0$, $V_{ON} = V_{IN} = 1.1\text{ V}$	Full	21.6	34		
		$I_{OUT} = 0$, $V_{ON} = V_{IN} = 1\text{ V}$	Full	20.3	33		
$I_{SD, VIN}$	Shut down current	$V_{ON} = 0$, $V_{IN} = 5\text{ V}$, $V_{OUT} = 0\text{ V}$	Full	0.76	2		μA
		$V_{ON} = 0$, $V_{IN} = 1\text{ V}$, $V_{OUT} = 0\text{ V}$	Full	0.07	0.8		
R_{ON}	On-resistance	$V_{IN} = 5\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	13.3	21		$\text{m}\Omega$
			Full		26		
		$V_{IN} = 4.5\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	13.3	21		$\text{m}\Omega$
			Full		26		
		$V_{IN} = 3.3\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	13.8	22		$\text{m}\Omega$
			Full		27		
		$V_{IN} = 2.5\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	15.4	24		$\text{m}\Omega$
			Full		29		
		$V_{IN} = 1.8\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	18.2	28		$\text{m}\Omega$
			Full		33		
		$V_{IN} = 1.2\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	25.6	37		$\text{m}\Omega$
			Full		44		
		$V_{IN} = 1.1\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	28.7	41		$\text{m}\Omega$
			Full		50		
		$V_{IN} = 1\text{ V}$, $I_{OUT} = -200\text{ mA}$	25°C	33.8	48		$\text{m}\Omega$
			Full		60		
$V_{HYS, ON}$	ON pin hysteresis	$V_{IN} = 5\text{ V}$	Full	115			mV
		$V_{IN} = 4.5\text{ V}$	Full	105			
		$V_{IN} = 3.3\text{ V}$	Full	80			
		$V_{IN} = 2.5\text{ V}$	Full	65			
		$V_{IN} = 1.8\text{ V}$	Full	50			
		$V_{IN} = 1.2\text{ V}$	Full	35			
		$V_{IN} = 1.1\text{ V}$	Full	30			
		$V_{IN} = 1\text{ V}$	Full	30			
I_{ON}	ON pin leakage current	$V_{ON} = 1.1\text{ V to }5.5\text{ V}$	Full		150		nA
$I_{RC, VIN}$	Reverse current when disabled	$V_{IN} = V_{ON} = 0\text{ V}$, $V_{OUT} = 5\text{ V}$	25°C	-0.02			μA
			85°C	-2.1			
$R_{PD}^{(1)}$	Output pulldown resistance	$V_{ON} = 0\text{ V}$, $I_{OUT} = 2\text{ mA}$	Full	273	325		Ω

(1) Available in TPS22964 only.

8.6 Switching Characteristics

PARAMETER		TEST CONDITION	TPS22963/64	UNIT
			TYP	
V _{IN} = 5.0 V, T _A = 25°C (unless otherwise noted)				
t _{ON}	Turn-ON time	R _{OUT} = 10Ω, C _{IN} = 1μF, C _{OUT} = 0.1μF	928	μs
t _{OFF}	Turn-OFF time	R _{OUT} = 10Ω, C _{IN} = 1μF, C _{OUT} = 0.1μF	2.5	
t _R	VOUT rise time	R _{OUT} = 10Ω, C _{IN} = 1μF, C _{OUT} = 0.1μF	890	
t _F	VOUT fall time	R _{OUT} = 10Ω, C _{IN} = 1μF, C _{OUT} = 0.1μF	2.1	
t _D	Delay time	R _{OUT} = 10Ω, C _{IN} = 1μF, C _{OUT} = 0.1μF	561	
V _{IN} = 4.5 V, T _A = 25°C (unless otherwise noted)				
t _{ON}	Turn-ON time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	905	μs
t _{OFF}	Turn-OFF time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	2.6	
t _R	VOUT rise time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	859	
t _F	VOUT fall time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	2.1	
t _D	Delay time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	560	
V _{IN} = 3.3 V, T _A = 25°C (unless otherwise noted)				
t _{ON}	Turn-ON time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	836	μs
t _{OFF}	Turn-OFF time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	2.8	
t _R	VOUT rise time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	715	
t _F	VOUT fall time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	2	
t _D	Delay time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	553	
V _{IN} = 1.8 V, T _A = 25°C (unless otherwise noted)				
t _{ON}	Turn-ON time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	822	μs
t _{OFF}	Turn-OFF time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	2.8	
t _R	VOUT rise time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	651	
t _F	VOUT fall time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	2	
t _D	Delay time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	558	
V _{IN} = 1.2 V, T _A = 25°C (unless otherwise noted)				
t _{ON}	Turn-ON time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	852	μs
t _{OFF}	Turn-OFF time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	3.2	
t _R	VOUT rise time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	535	
t _F	VOUT fall time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	1.8	
t _D	Delay time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	594	
V _{IN} = 1.1 V, T _A = 25°C (unless otherwise noted)				
t _{ON}	Turn-ON time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	861	μs
t _{OFF}	Turn-OFF time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	3.5	
t _R	VOUT rise time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	518	
t _F	VOUT fall time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	1.9	
t _D	Delay time	R _{OUT} = 10 Ω, C _{IN} = 1 μF, C _{OUT} = 0.1 μF	604	

8.7 Typical Electrical Characteristics

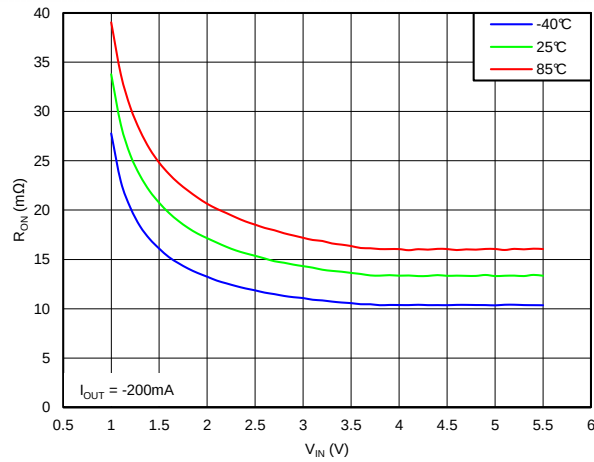


图 1. On Resistance vs V_{IN}

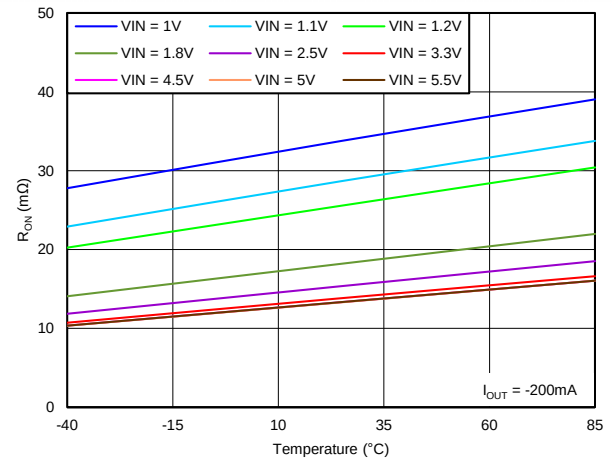


图 2. On Resistance vs Temperature

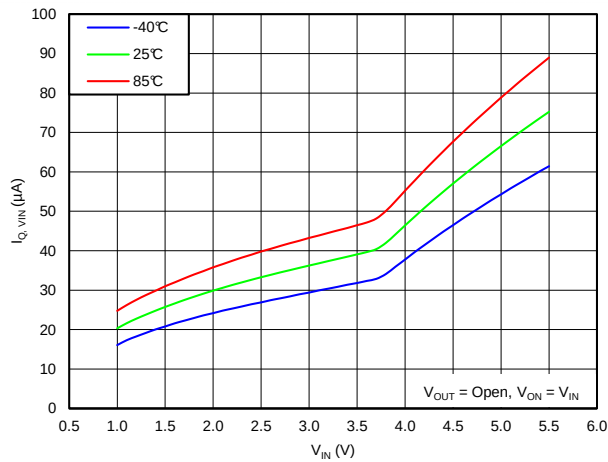


图 3. Quiescent Current vs V_{IN}

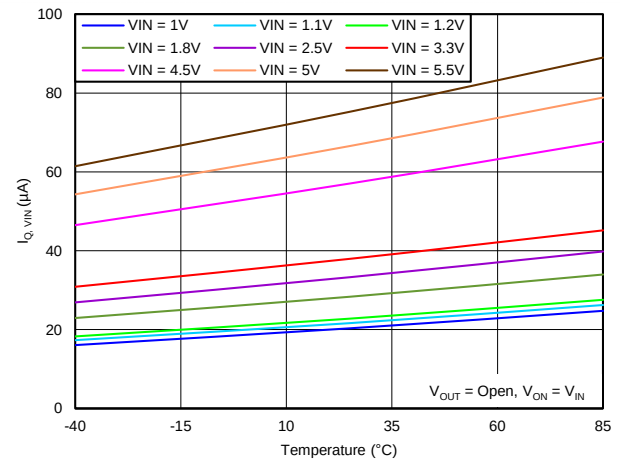


图 4. Quiescent Current vs Temperature

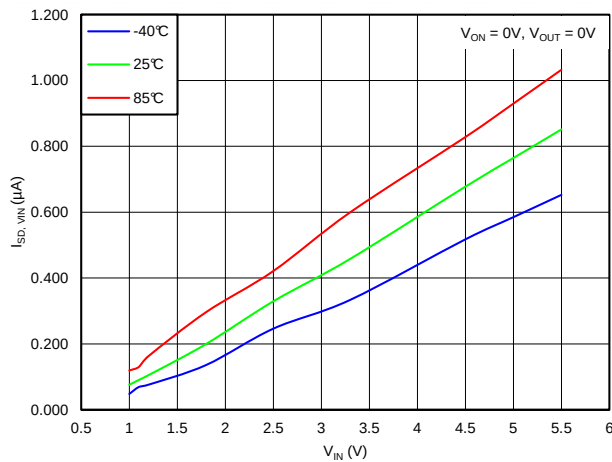


图 5. Shut Down Current vs V_{IN}

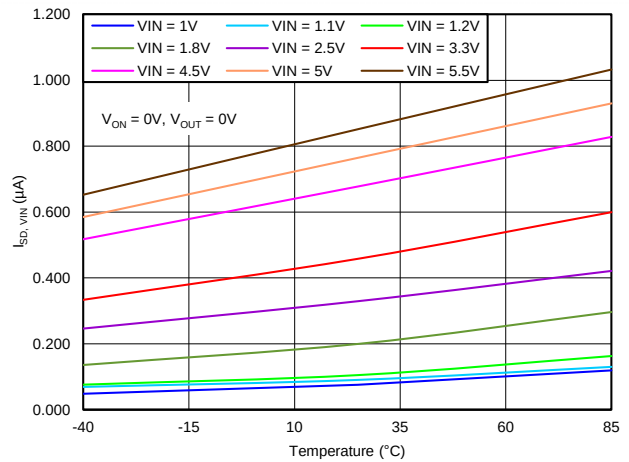


图 6. Shut Down Current vs Temperature

Typical Electrical Characteristics (接下页)

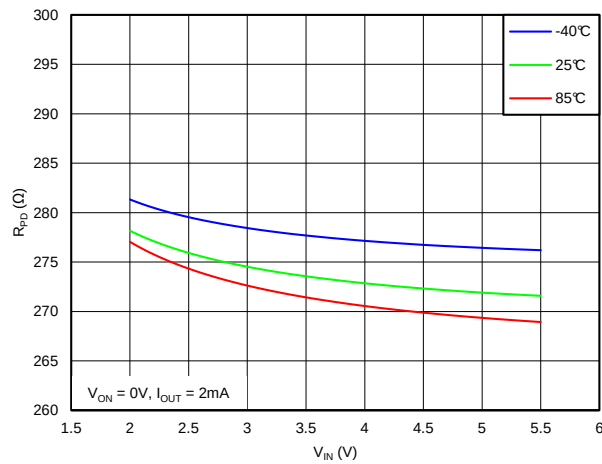


图 7. Output Pulldown Resistance vs V_{IN}

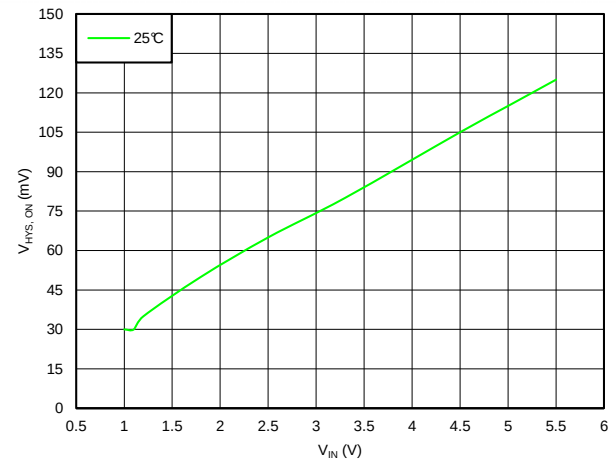


图 8. On Pin Hysteresis vs V_{IN}

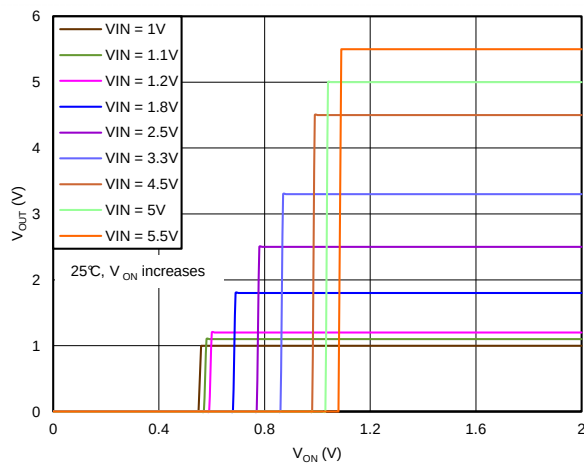


图 9. Output Voltage vs V_{ON} Rising

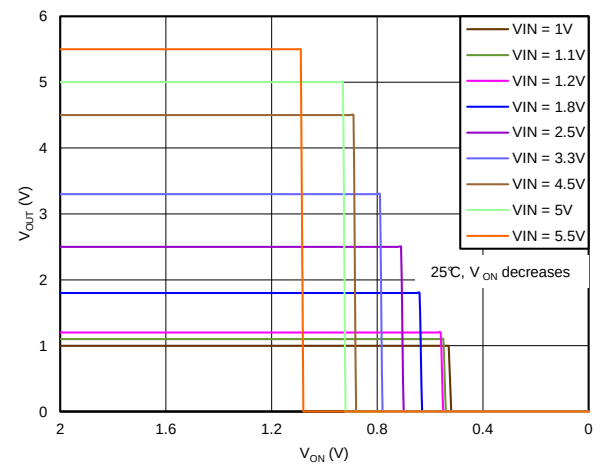


图 10. Output Voltage vs V_{ON} Falling

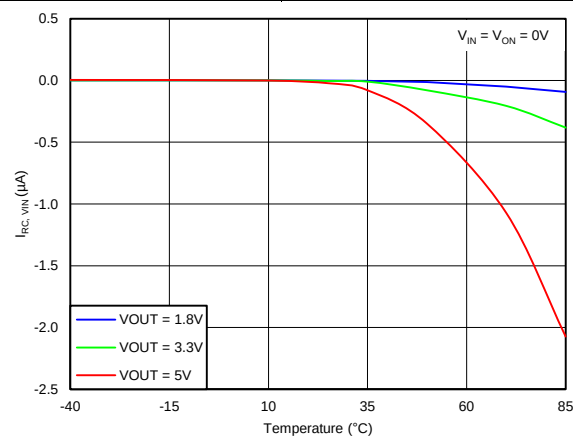


图 11. Reverse Current When Disabled vs Temperature

8.8 Typical Switching Characteristics

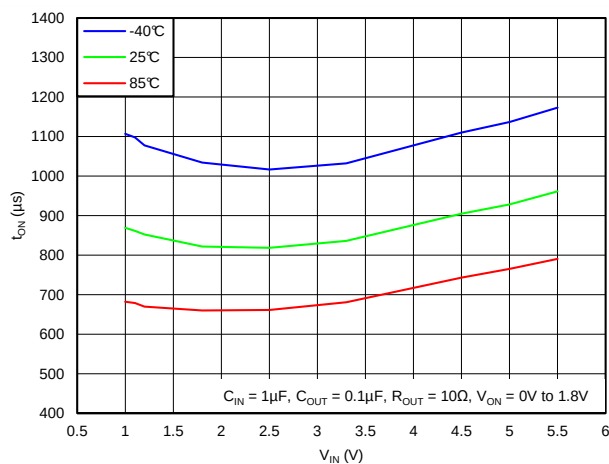


图 12. Turn-On Time vs V_{IN}

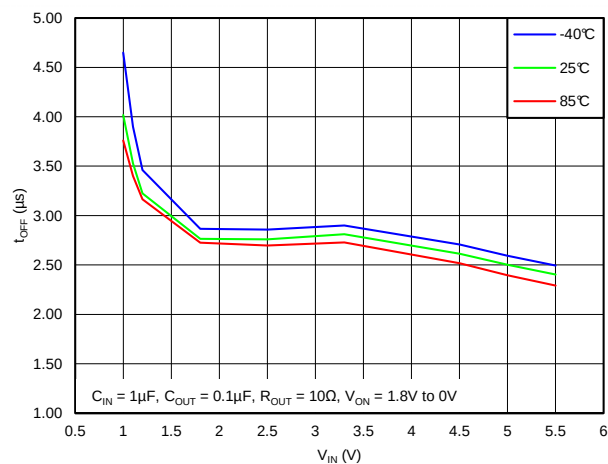


图 13. Turn-Off Time vs V_{IN}

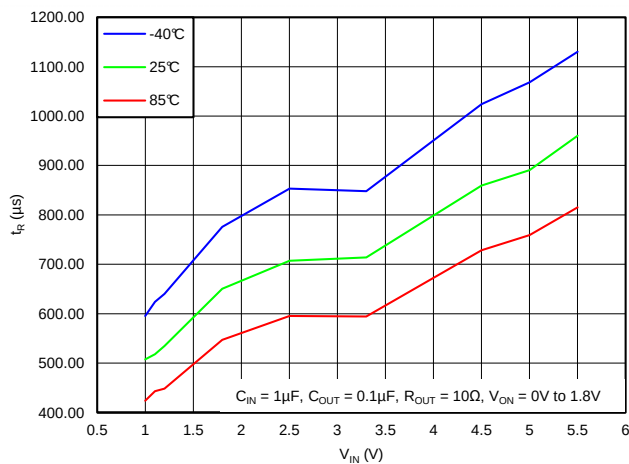


图 14. V_{OUT} Rise Time vs V_{IN}

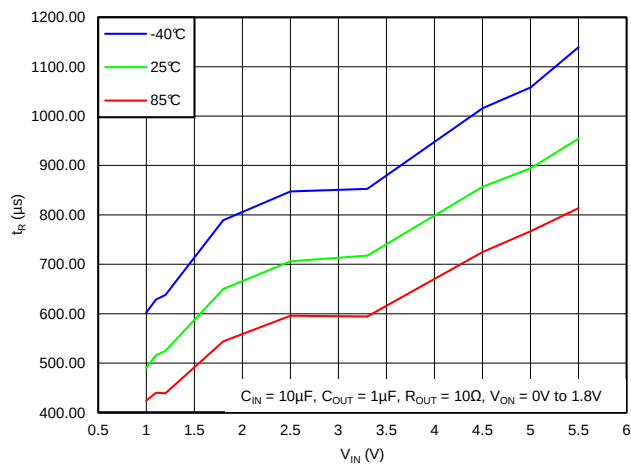


图 15. V_{OUT} Rise Time vs V_{IN}

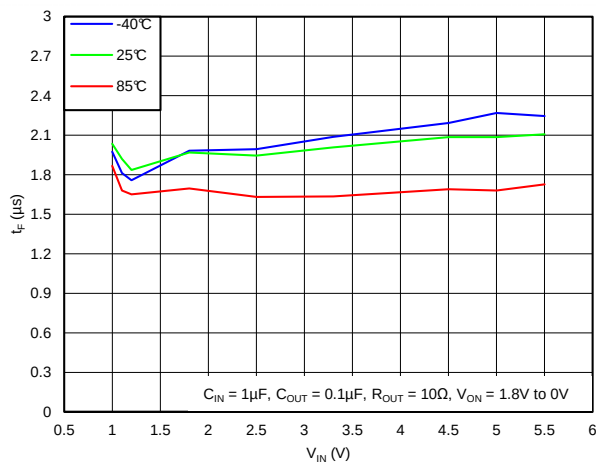


图 16. V_{OUT} Fall Time vs V_{IN}

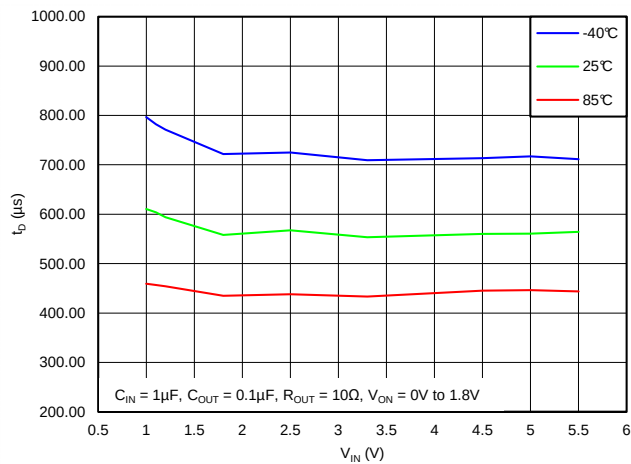


图 17. Delay Time vs V_{IN}

8.9 Typical AC Scope Captures at $T_A = 25^\circ\text{C}$

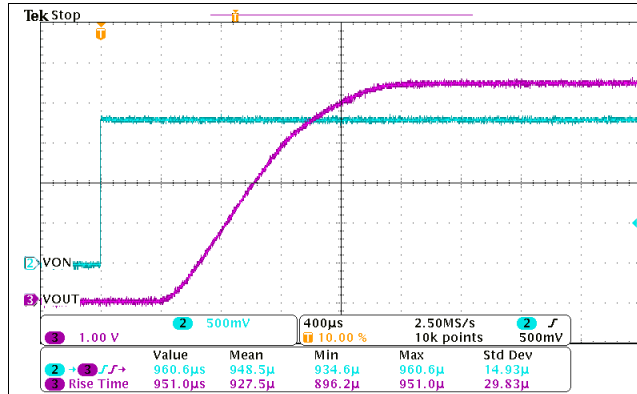


图 18. Turn-On Response Time ($V_{IN} = 5.5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

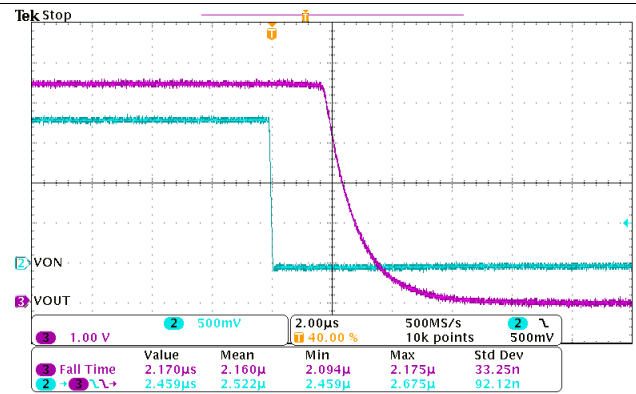


图 19. Turn-Off Response Time ($V_{IN} = 5.5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

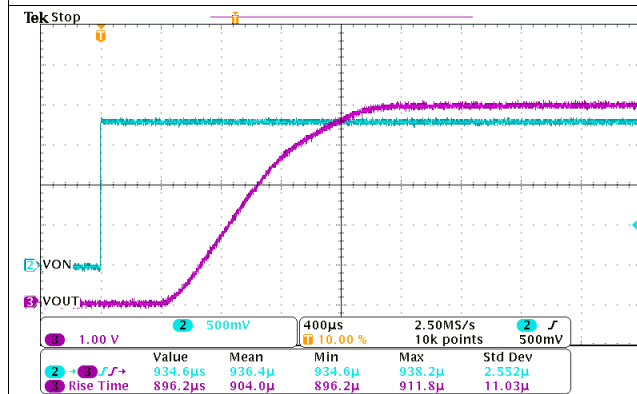


图 20. Turn-On Response Time ($V_{IN} = 5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

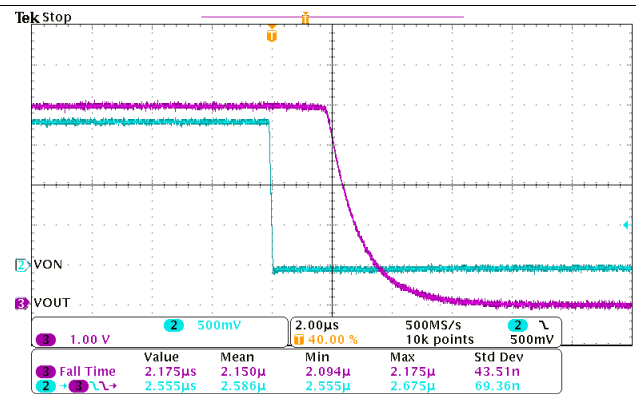


图 21. Turn-Off Response Time ($V_{IN} = 5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

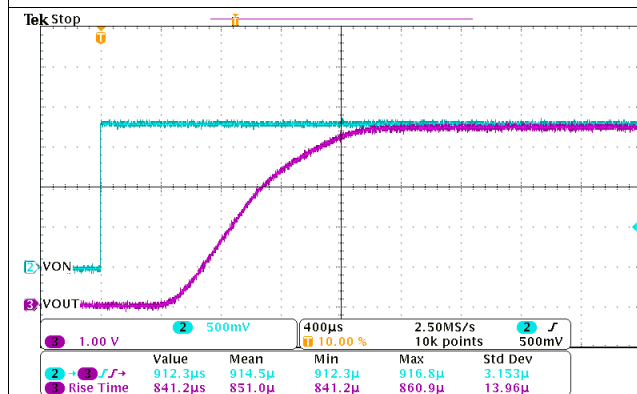


图 22. Turn-On Response Time ($V_{IN} = 4.5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

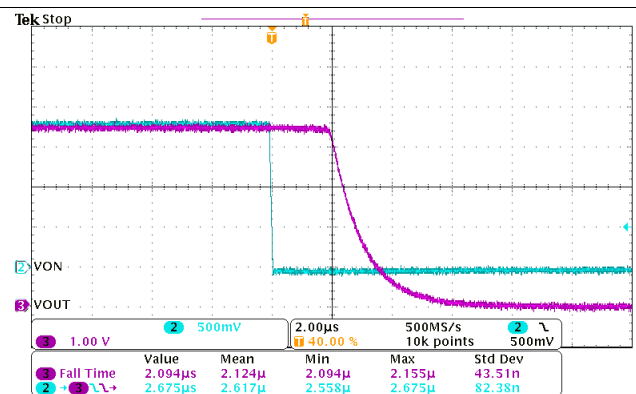


图 23. Turn-Off Response Time ($V_{IN} = 4.5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

Typical AC Scope Captures at $T_A = 25^\circ\text{C}$ (接下页)

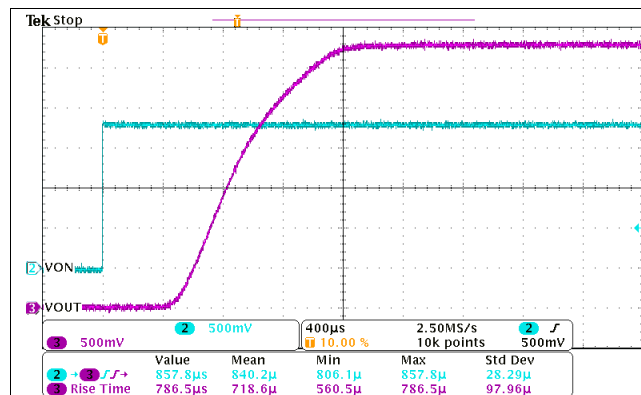


图 24. Turn-On Response Time ($V_{IN} = 3.3\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

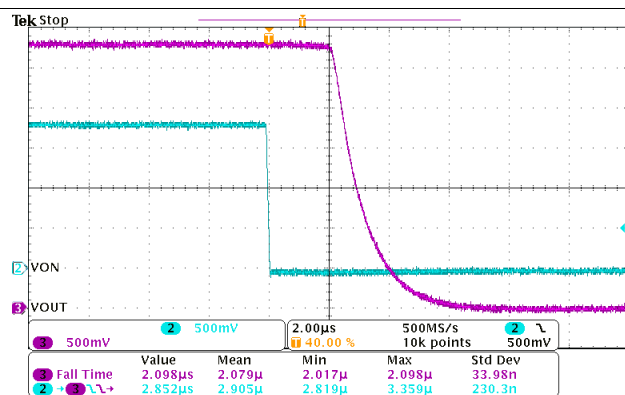


图 25. Turn-Off Response Time ($V_{IN} = 3.3\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

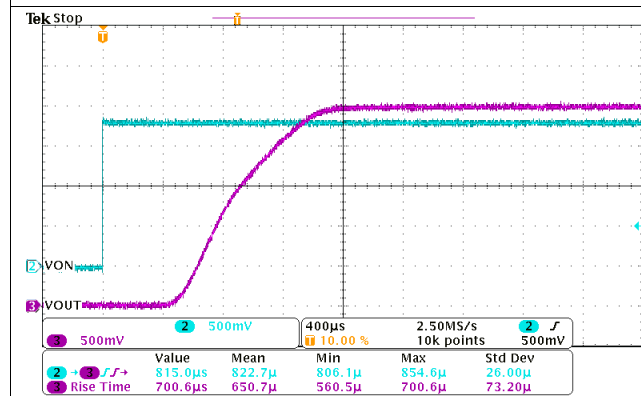


图 26. Turn-On Response Time ($V_{IN} = 2.5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

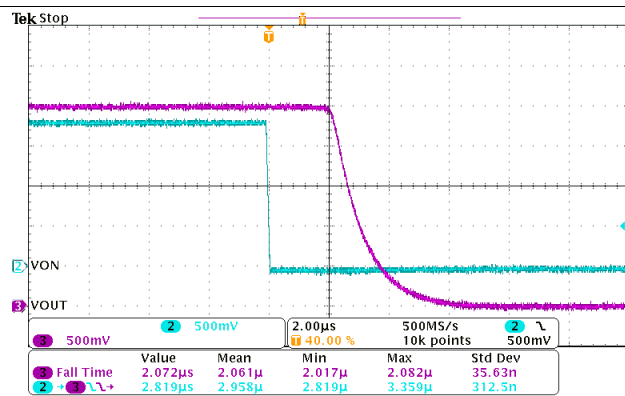


图 27. Turn-Off Response Time ($V_{IN} = 2.5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

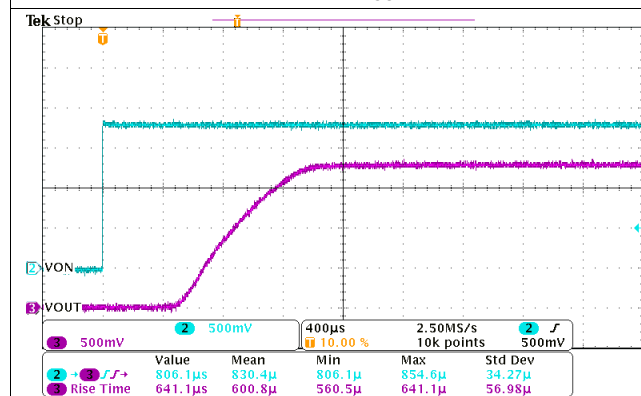


图 28. Turn-On Response Time ($V_{IN} = 1.8\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

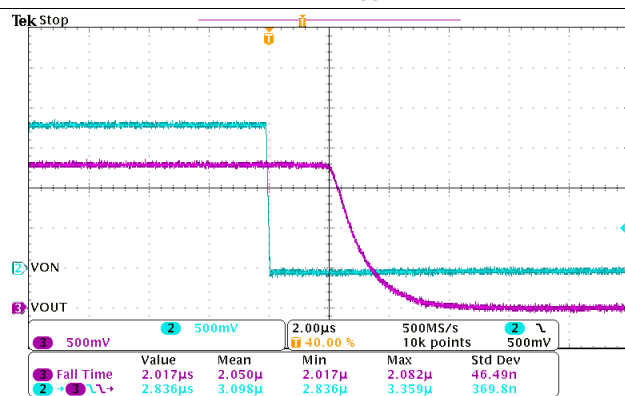


图 29. Turn-Off Response Time ($V_{IN} = 1.8\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

Typical AC Scope Captures at $T_A = 25^\circ\text{C}$ (接下页)

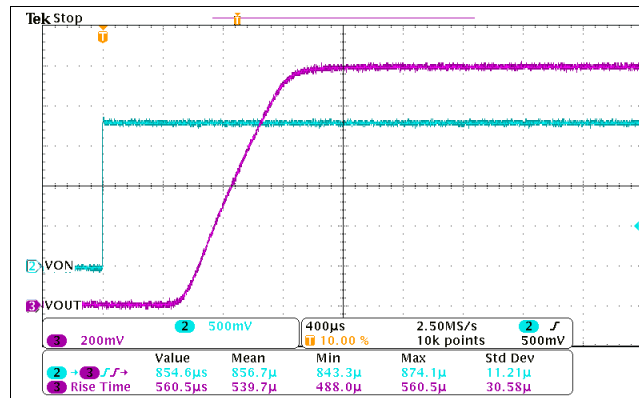


图 30. Turn-On Response Time ($V_{IN} = 1.2\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

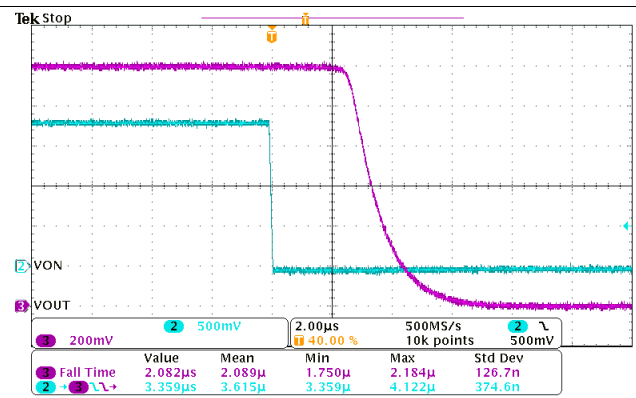


图 31. Turn-Off Response Time ($V_{IN} = 1.2\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

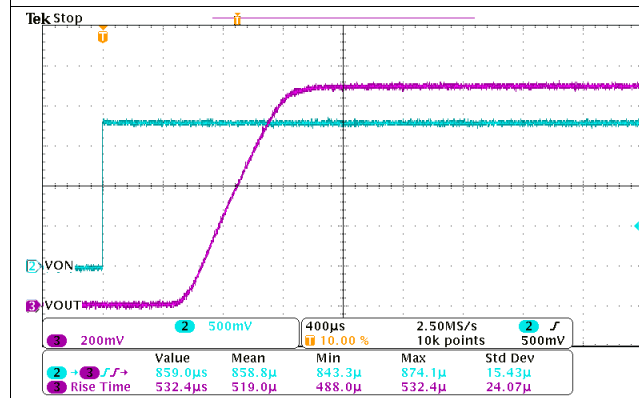


图 32. Turn-On Response Time ($V_{IN} = 1.1\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

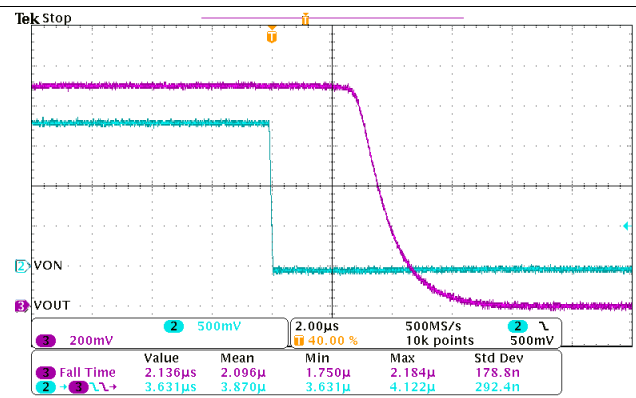


图 33. Turn-Off Response Time ($V_{IN} = 1.1\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

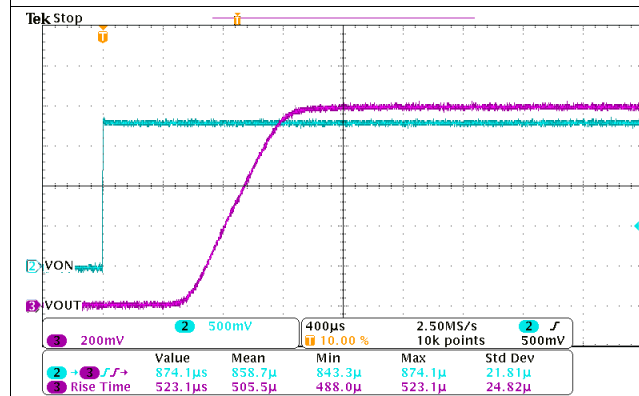


图 34. Turn-On Response Time ($V_{IN} = 1\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

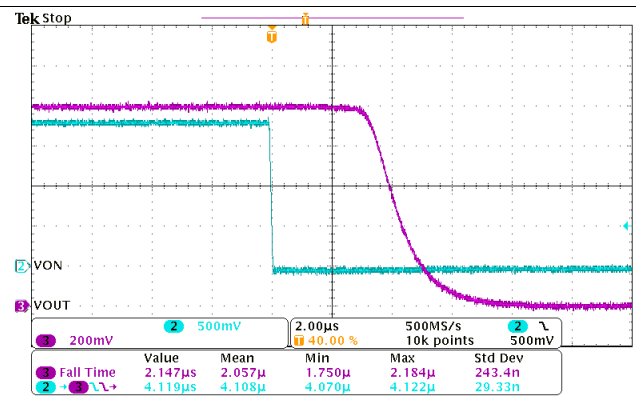


图 35. Turn-Off Response Time ($V_{IN} = 1\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $R_{OUT} = 10\text{ }\Omega$)

9 Parametric Measurement Information


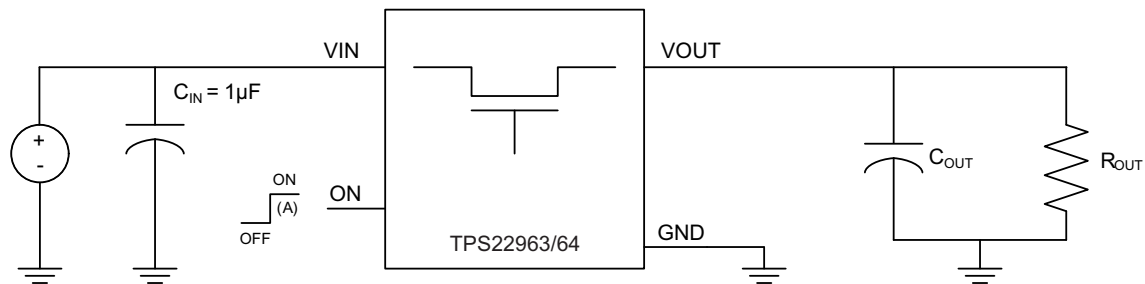


图 36. Test Circuit

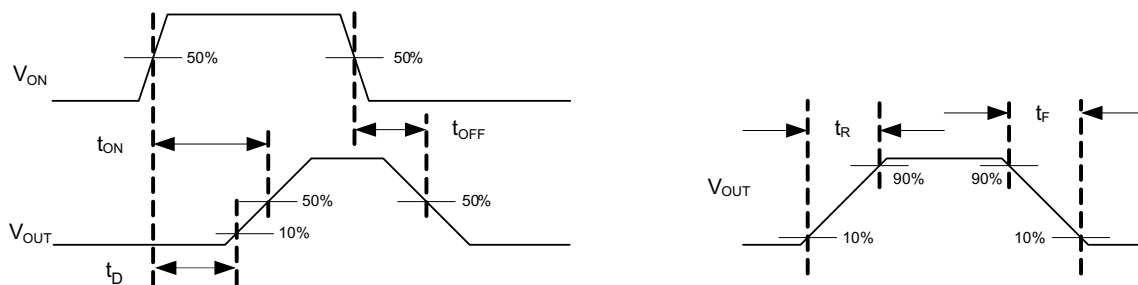

A. Rise and fall times of the control signal are 100 ns.


图 37. Timing Waveforms

10 Detailed Description

10.1 Overview

The TPS22963/64 is a single channel, 3-A load switch in a small, space saving CSP-6 package. These devices implement an N-channel MOSFET to provide an ultra-low On-resistance for a low voltage drop across the device. A controlled rise time is used in applications to limit the inrush current.

10.2 Functional Block Diagram

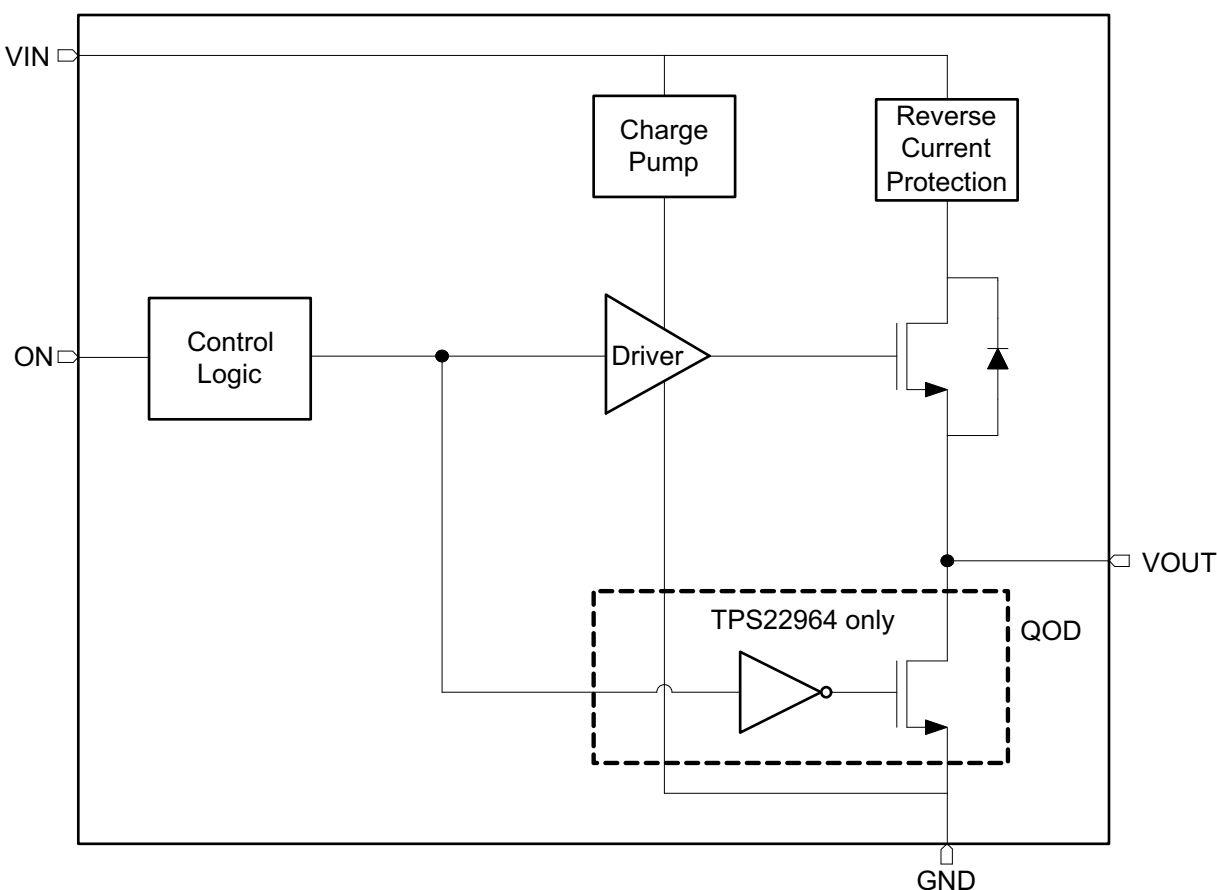

10.3 Feature Description

10.3.1 On/Off Control

The ON pin controls the state of the switch. It is an active “High” pin and has a low threshold making it capable of interfacing with low voltage GPIO control signals. It can be used with any microcontroller with 1.2 V, 1.8 V, 2.5 V, 3.3 V or 5.5 V GPIOs. Applying V_{IH} on the ON pin will put the switch in the ON-state and V_{IL} will put the switch in the OFF-state.

10.3.2 Quick Output Discharge

The TPS22964 includes the Quick Output Discharge (QOD) feature. When the switch is disabled, a discharge resistance with a typical value of 273Ω is connected between the output and ground. This resistance pulls down the output and prevents it from floating when the device is disabled.

10.4 Device Functional Modes

表 1. Function Table

ON	VIN to VOUT	OUTPUT DISCHARGE ^{(1) (2)}
L	OFF	ACTIVE
H	ON	DISABLED

(1) This feature discharges the output of the switch to ground through a 273 Ω resistor, preventing the output from floating.

(2) This feature is in the TPS22964 device only (not in the TPS22963).

11 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

11.1 Application Information

11.1.1 Input Capacitor

It is recommended to place a capacitor (C_{IN}) between VIN and GND pins of TPS22963/64. This capacitor helps to limit the voltage drop on the input voltage supply when the switch turns ON into a discharged load capacitor. A 1-μF ceramic capacitor that is placed close to the IC pins is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop in high current applications.

11.1.2 Output Capacitor

It is recommended to place a capacitor (C_{OUT}) between VOUT and GND pins of TPS22963/64. This capacitor acts as a low pass filter along with the switch ON-resistance to remove any voltage glitches coming from the input voltage source. It is generally recommended to have C_{IN} greater than C_{OUT} so that once the switch is turned ON, C_{OUT} can charge up to V_{IN} without V_{IN} dropping significantly. A 0.1-μF ceramic capacitor that is placed close to the IC pins is usually sufficient.

Application Information (接下页)

11.1.3 Standby Power Reduction

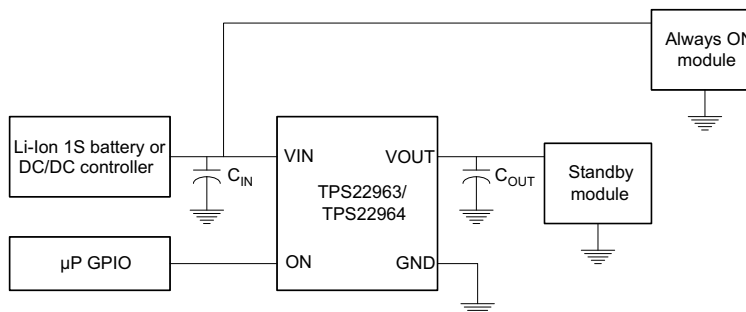



图 38. Standby Power Reduction

Any end equipment that is being powered from the battery has a need to reduce current consumption in order to keep the battery charged for a longer time. TPS22963/64 helps to accomplish this by turning off the supply to the modules that are in standby state and hence significantly reduces the leakage current overhead of the standby modules.

11.1.4 Reverse Current Protection

The reverse current protection feature prevents the current to flow from VOUT to VIN when TPS22963/64 is disabled. This feature is particularly useful when the output of TPS22963/64 needs to be driven by another voltage source after TPS22963/64 is disabled (for example in a power multiplexer application). In order for this feature to work, TPS22963/64 has to be disabled and either of the following conditions shall be met: $V_{IN} > 1\text{ V}$ or $V_{OUT} > 1\text{ V}$.

图 39 demonstrates the ideal behavior of reverse current protection circuit in TPS22963/64. After the device is disabled via the ON pin and VOUT is forced to an external voltage V_{FORCE} , a very small amount of current given by $I_{RC,VIN}$ will flow from VOUT to VIN. This will prevent any extra current loading on the voltage source supplying the V_{FORCE} voltage.

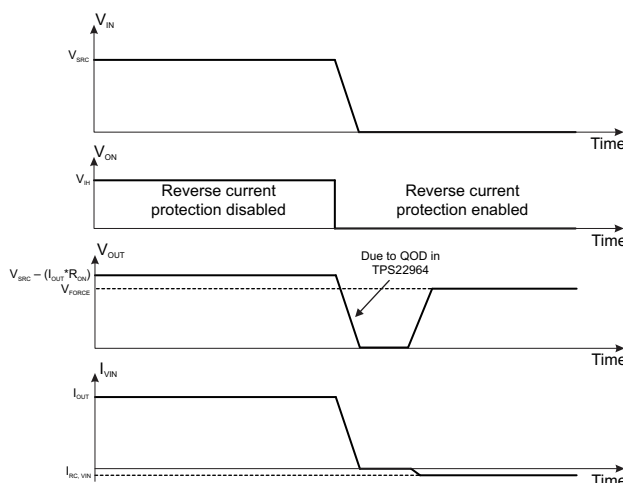

I_{VIN} = Current through VIN pin.

V_{SRC} = Input voltage applied to the device.

V_{FORCE} = External voltage source forced at VOUT pin of the device.

I_{OUT} = Output load current.

图 39. Reverse Current Protection

Application Information (接下页)

11.1.5 Power Supply Sequencing Without a GPIO Input

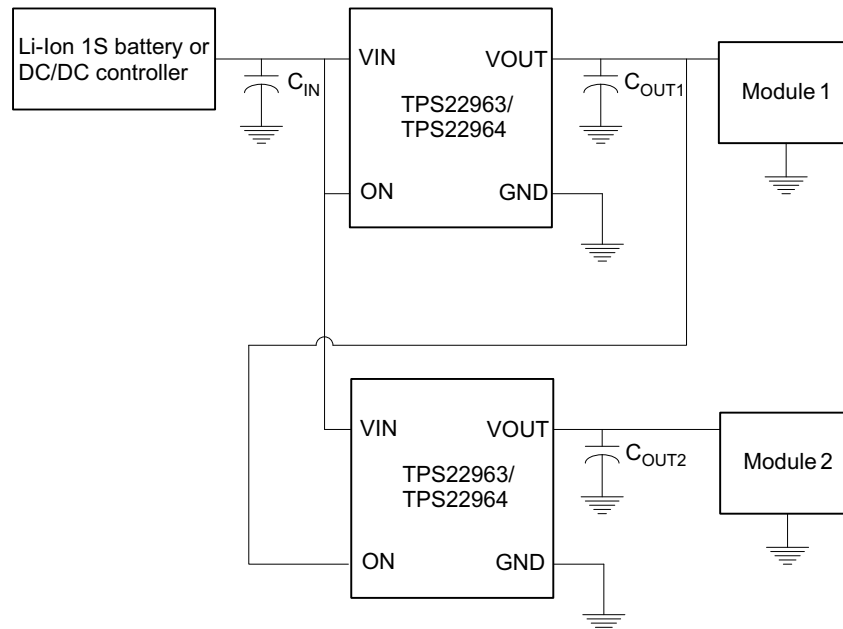


图 40. Power Supply Sequencing Without a GPIO Input

In many end equipments, there is a need to power up various modules in a pre-determined manner. TPS22963/64 can solve the problem of power sequencing without adding any complexity to the overall system. 图 40 shows the configuration required for powering up two modules in a fixed sequence. The output of the first load switch is tied to the enable of the second load switch, so when Module 1 is powered the second load switch is enabled and Module 2 is powered.

11.2 Typical Application

TPS22963/64 is an ultra-low ON-resistance, 3-A integrated load switch that is capable of interfacing directly with 1S battery in portable consumer devices such as smartphones, tablets etc. Its wide input voltage range (1 V to 5.5 V) makes it suitable to be used for lower voltage rails as well inside different end equipments to accomplish power sequencing, inrush current control and reducing leakage current in sub-systems that are in standby mode. 图 41 shows the typical application circuit of TPS22963/64.

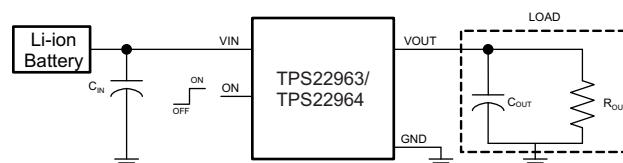


图 41. Typical Application Circuit

11.2.1 Design Requirements

DESIGN PARAMETER	EXAMPLE VALUE
V_{IN}	3.3 V
C_L	4.7 μ F
Maximum Acceptable Inrush Current	30 mA

11.2.2 Detailed Design Procedure

11.2.2.1 Managing Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0 V to the set value (3.3 V in this example). This charge arrives in the form of inrush current. Inrush current can be calculated using the following equation:

$$I_{\text{INRUSH}} = C_L \times \frac{dV_{\text{OUT}}}{dt}$$

where

- C = output capacitance
- dV = output voltage
- dt = rise time

(1)


The TPS22963/64 offers a controlled rise time for minimizing inrush current. This device can be selected based upon the minimum acceptable rise time which can be calculated using the design requirements and the inrush current equation. An output capacitance of 4.7 μF will be used since the amount of inrush current increases with output capacitance:

$$30 \text{ mA} = 4.7 \mu\text{F} \times 3.3 \text{ V} / dt \quad (2)$$

$$dt = 517 \mu\text{s} \quad (3)$$

To ensure an inrush current of less than 30 mA, a device with a rise time greater than 517 μs must be used. The TPS22963/64 has a typical rise time of 715 μs at 3.3 V which meets the above design requirements.

11.2.3 Application Curves

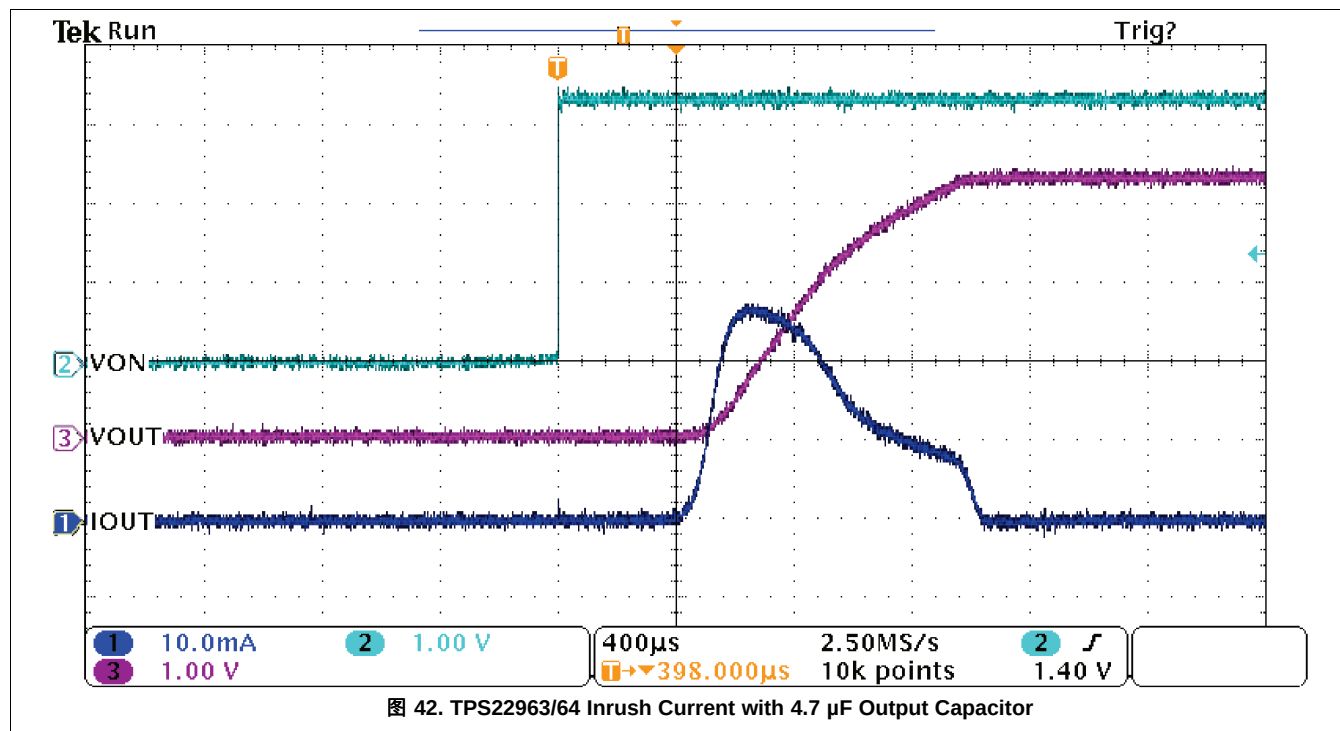

12 Power Supply Recommendations

The device is designed to operate with a VIN range of 1 V to 5.5 V. This supply must be well regulated and placed as close to the device terminal as possible with the recommended 1 µF bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10 µF may be sufficient.

13 Layout

13.1 Layout Guidelines

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for VIN, VOUT and GND will help minimize the parasitic electrical effects.

For higher reliability, the maximum IC junction temperature, $T_{J(max)}$, should be restricted to 125°C under normal operating conditions. Junction temperature is directly proportional to power dissipation in the device and the two are related by 公式 4.

$$T_J = T_A + \Theta_{JA} \times P_D$$

where

- T_J = Junction temperature of the device
- T_A = Ambient temperature
- P_D = Power dissipation inside the device
- Θ_{JA} = Junction to ambient thermal resistance. See Thermal Information section of the datasheet. This parameter is highly dependent on board layout.

(4)

13.2 Layout Example

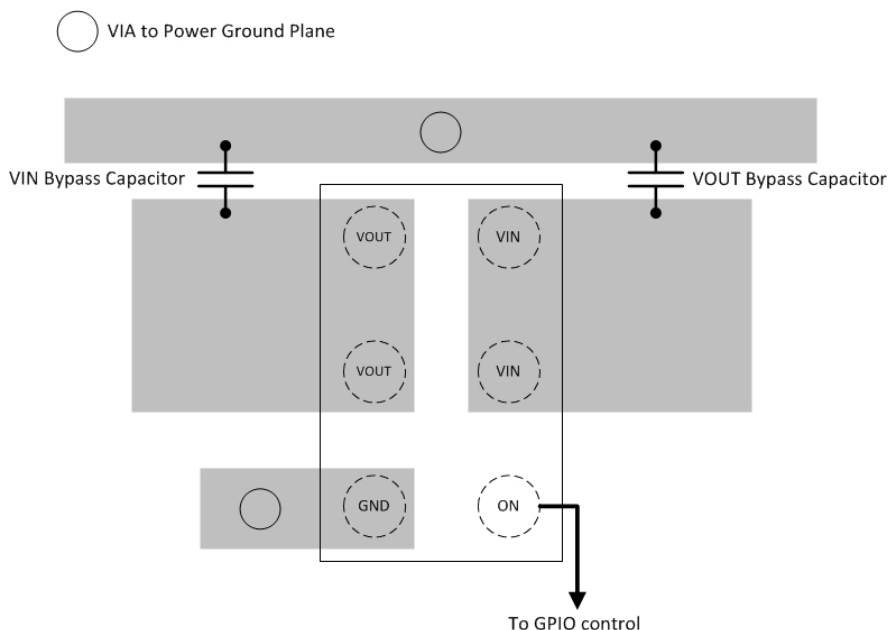


图 43. Layout Example

14 器件和文档支持

14.1 相关链接

以下表格列出了快速访问链接。范围包括技术文档、支持与社区资源、工具和软件，并且可以快速访问样片或购买链接。

表 2. 相关链接

器件	产品文件夹	样片与购买	技术文档	工具与软件	支持与社区
TPS22963C	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处
TPS22964C	请单击此处	请单击此处	请单击此处	请单击此处	请单击此处

14.2 商标

超极本 is a trademark of Intel Corporation in the U.S. and/or other countries.
All other trademarks are the property of their respective owners.

14.3 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

14.4 术语表

[SLYZ022](#) — TI 术语表。

这份术语表列出并解释术语、首字母缩略词和定义。

15 机械封装和可订购信息

以下页中包括机械封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com.cn/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2015, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS22963CZYZPR	ACTIVE	DSBGA	YZP	6	3000	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	BD	Samples
TPS22963CZYZPT	ACTIVE	DSBGA	YZP	6	250	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	BD	Samples
TPS22964CZYZPR	ACTIVE	DSBGA	YZP	6	3000	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	DK	Samples
TPS22964CZYZPT	ACTIVE	DSBGA	YZP	6	250	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	DK	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

⁽²⁾ **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

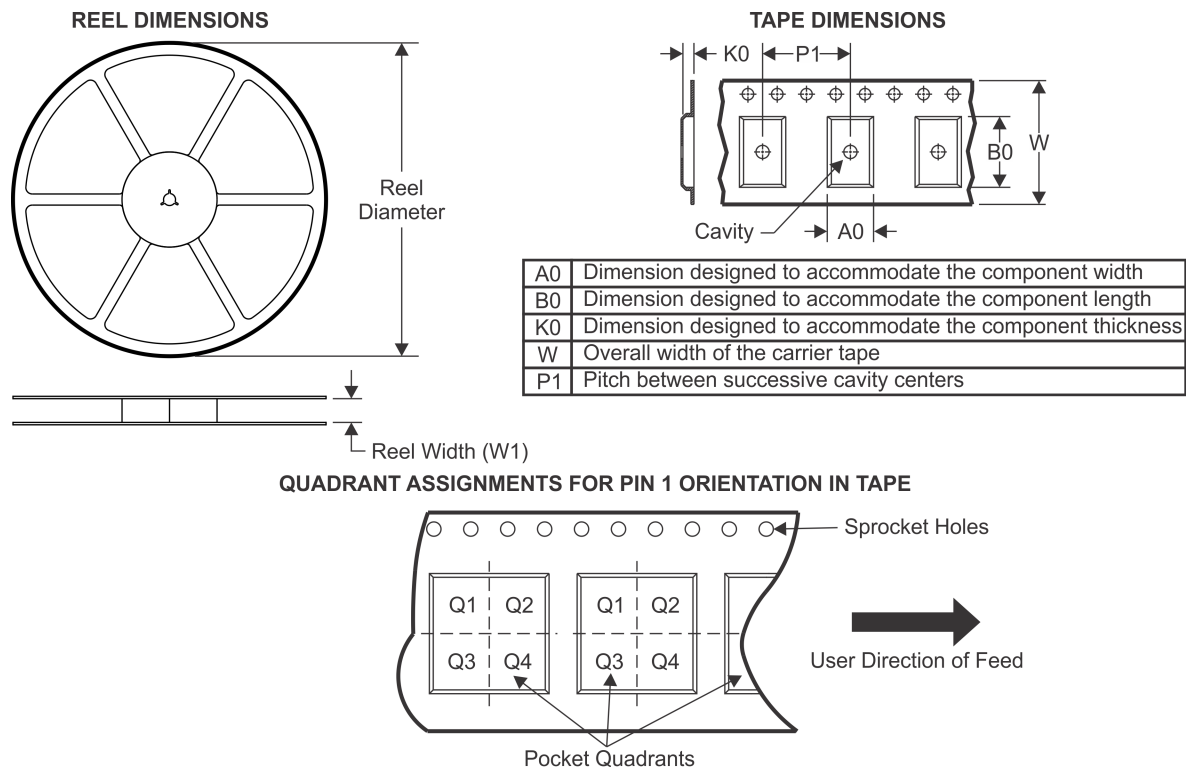TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22963CYZPR	DSBGA	YZP	6	3000	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1
TPS22963CYZPT	DSBGA	YZP	6	250	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1
TPS22964CYZPR	DSBGA	YZP	6	3000	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1
TPS22964CYZPT	DSBGA	YZP	6	250	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1


TAPE AND REEL BOX DIMENSIONS

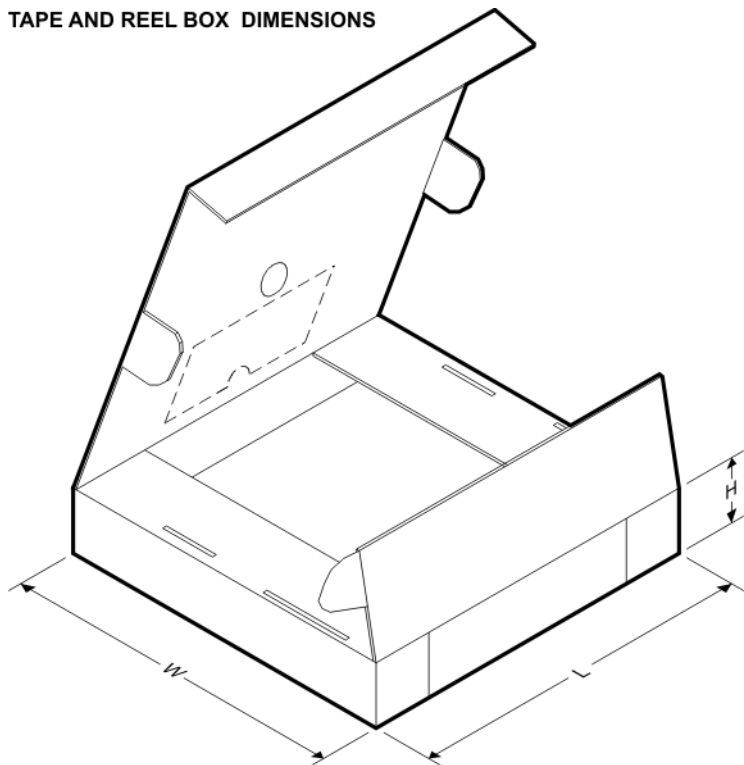

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22963CZYPR	DSBGA	YZP	6	3000	182.0	182.0	20.0
TPS22963CZYPT	DSBGA	YZP	6	250	182.0	182.0	20.0
TPS22964CZYPR	DSBGA	YZP	6	3000	182.0	182.0	20.0
TPS22964CZYPT	DSBGA	YZP	6	250	182.0	182.0	20.0


YZP0006



PACKAGE OUTLINE

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

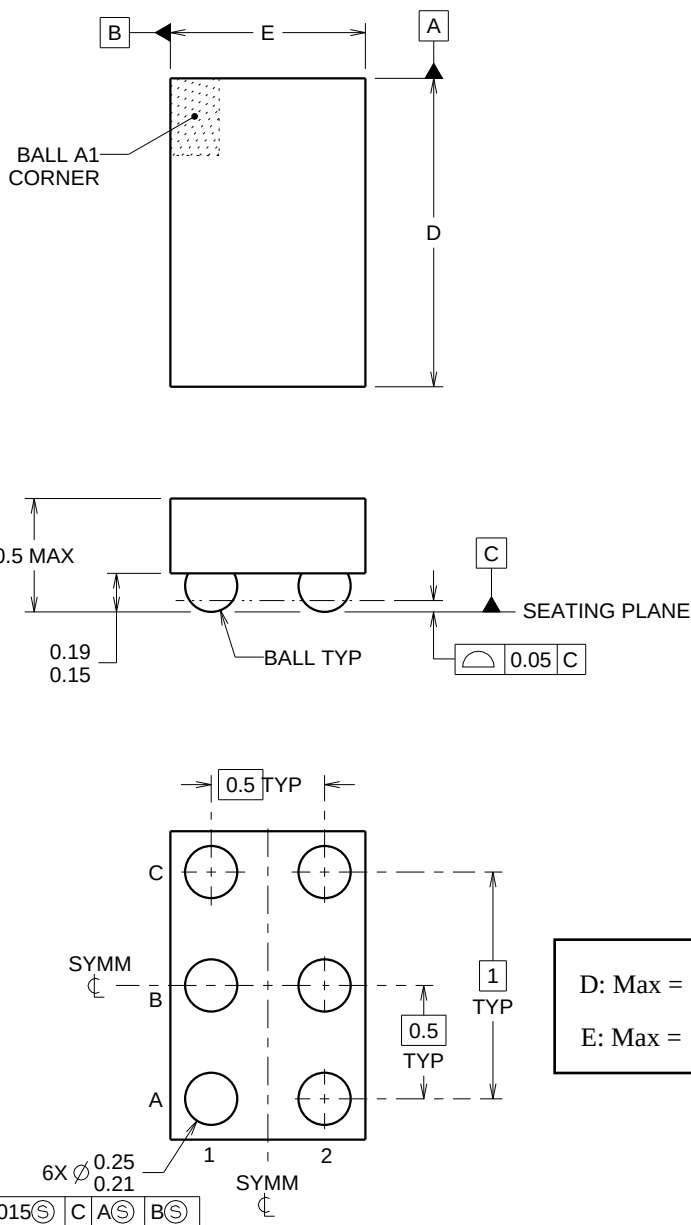

D: Max = 1.472 mm, Min = 1.412 mm
E: Max = 0.972 mm, Min = 0.912 mm

4219524/A 06/2014

NOTES:

NanoFree Is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. NanoFree™ package configuration.

EXAMPLE BOARD LAYOUT


YZP0006

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

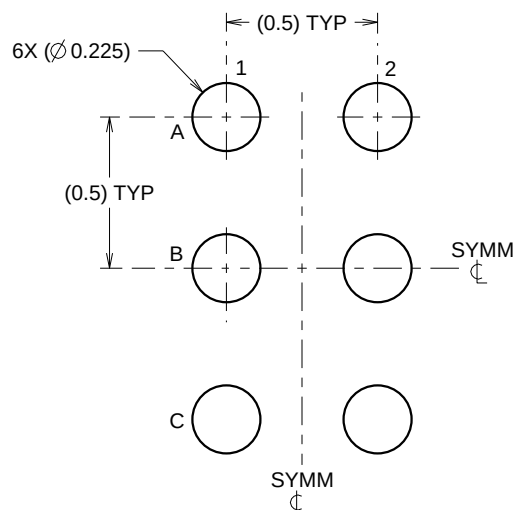

LAND PATTERN EXAMPLE
SCALE:40X

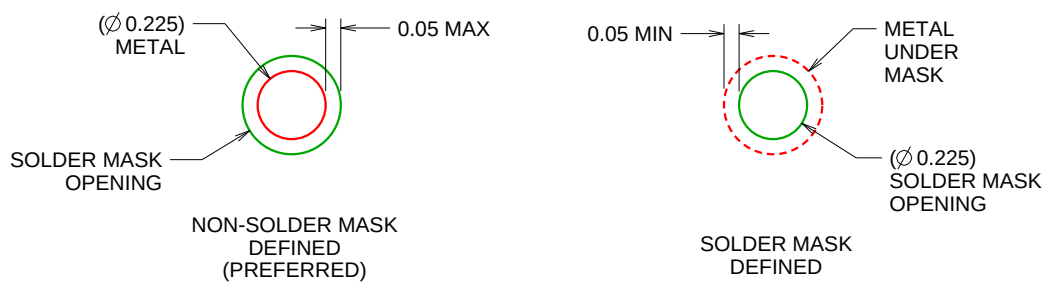


SOLDER MASK DETAILS
NOT TO SCALE

4219524/A 06/2014

NOTES: (continued)

- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SBVA017 (www.ti.com/lit/sbva017).

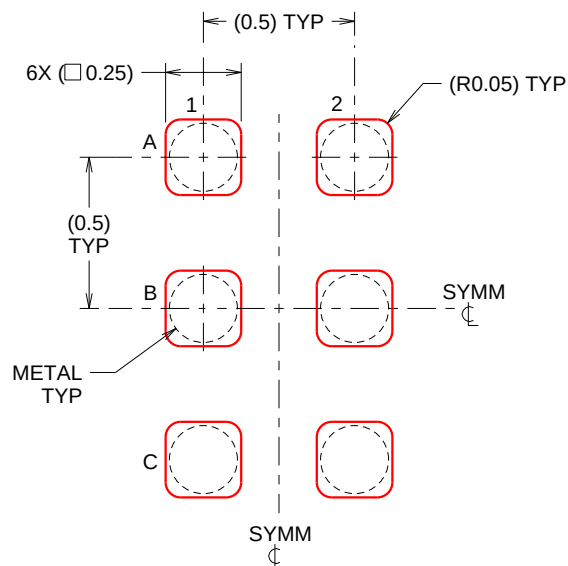

SOLDER PASTE EXAMPLE
 BASED ON 0.1 mm THICK STENCIL
 SCALE:40X

4219524/A 06/2014

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司